


# A5, 双面印

## OPTONICA

### User Manual



### Kinetic Switch SET

IMPORTER: Prima Group 2004 LTD, Bulgaria, 1784 Sofia, Mladost 1, bl. 144, Ground Floor; Phone: +359 2 988 45 72;

1

#### Specification of Controller:

Type: 1 Gang Controller, 2 Gang Controller

Dimension: 55L x 45W x 25D(mm)

Max Load: AC 110V-240V~ 60Hz, <600W(each gang)

Standby Power: <0.3W

Frequency: 433MHz


IP Rate: IP20

#### ⚠ Cautions:

1. Range may vary dramatically in different environments.
2. The controller is not available to work with air conditioner, pump, or any other appliance >600W(each gang).
3. Be sure which one is live wire before shut down the power and install the controller.

4

#### Product combination:

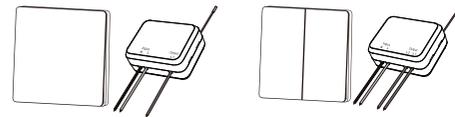

SKU: 7651;7652  
Product Code : S2-A1


SKU: 7653;7654




2

#### Installation:

1. Use the double-sided tape to install.

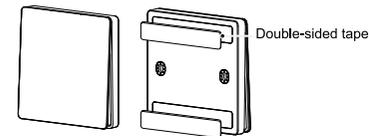

2. Use the screws and anchors to install.

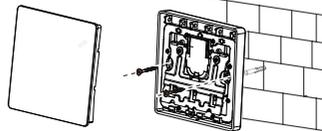

\* The switch is available for portable use of indoor.

5

#### Specification of Switch:

Type: 1 Gang, 2 Gang

Dimension: 86L x 86W x 15D(mm)

Life Time: >100,000 Times

Frequency: 433MHz



IP Rate: IP44

#### ⚠ Cautions:

1. Avoid installing switch on metal surface, that may seriously affect the operation range.
2. Range may vary dramatically in different environments.

3

#### Installation:

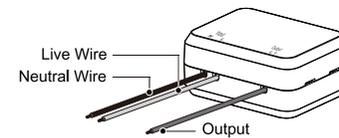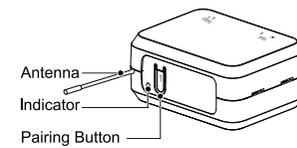


#### ⚠ Cautions:

- 1 Gang controller can control multiple home appliances but must be sure all they are in series circuit <600W(each gang).

6

#### Installation:

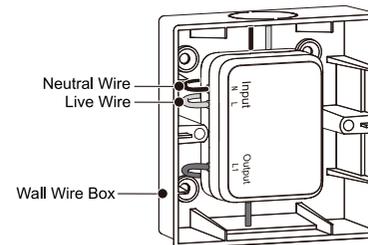

#### ⚠ Cautions:

1. The lighting device(LED) will twinkle if connection of N and L wires is wrong.
2. The controller will not work if connection of input and output wires is wrong.

7

#### How to pairing:


Be sure to pairing the switch and controller before usage.



1. Hold 3 secs.



2. Release once LED flashes.



3. Press the switch.




4. LED flashes once pairing completed.




5. Press the button to exit the pairing mode.

11

#### Now (1 Gang Controller):

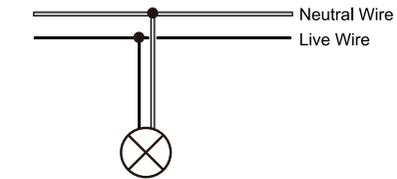


#### Next:

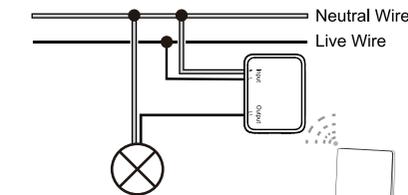


8

#### Now (2 Gang Controller):

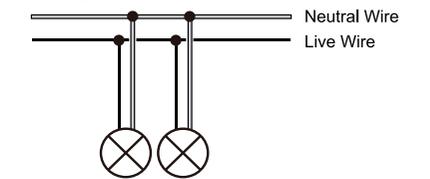

#### Next:

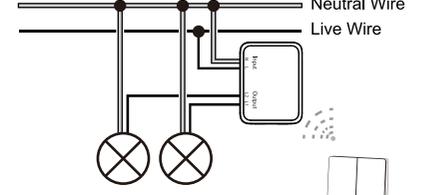


9


#### How to Reset:



1. Hold the pairing button for 12 seconds.



2. LED flashes 3 times.



3. Release the pairing button.

12