
# OPTONICA

DATASHEET



## Mini pannello a LED Backlit rotondo slim

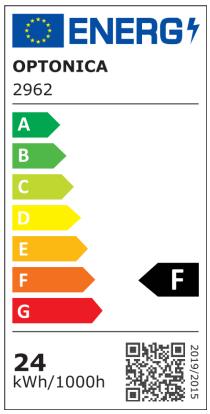


**Potenza**

24W

**Colore della luce**

Luce calda

**Stamps**

CE RoHS -80

## Specifiche tecniche

| | | | |
|---|---|---|---|
| **Brand** | Optonica | **Instant On** | 0.1s |
| **Product Code** | DL24-B1 | **Operating Frequency** | 50-60 Hz |
| **Power** | 24W | **Temperature** | -20°C / +40°C |
| **Energy Consumption** | 24 kWh/1000h | **Ra ≥** | 80 |
| **Input voltage** | AC85-265V | **Life span** | 25 000 Hours |
| **Flux** | 1920 lm | **Body Color** | White |
| **FLUX per watt** | 80 lm/W | **Lumen maintenance at end of service life** | 70% |
| **IP** | 20 | **Size of product** | Φ300x27mm |
| **Dimmable** | No | **Size of package** | 32.5x3x30.5cm |
| **Correlated Color Temperature** | 3000K | **Size of Box** | 33.5x32x32cm |
| **Light Color** | Luce calda | **Items per pack** | 1 |
| **EAN Code** | 3800156629622 | **Items per box** | 10 |
| **Energy Efficiency Label** | F | **Material** | Aluminium |
| **Beam angle** | 120º | **Gross weight** | 0,397 kg |
| **Hole Size** | Φ280mm | **Net weight** | 0,287 kg |
| **On/Off Cycles** | 25 000x | **Warranty** | 2 Years |