


# OPTONICA

## DATASHEET



### 12W LED Aufbau Mini Panel Quadratisch CCT Weiß

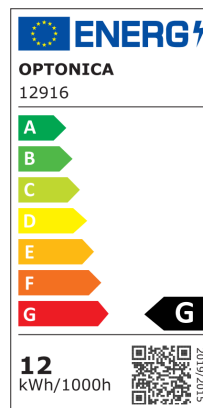

#### Leistung

12W

#### Lichtfarbe

CCT

#### Stamps



RoHS



-80



## Technische Spezifikation

|                              |                   |                                          |               |
|------------------------------|-------------------|------------------------------------------|---------------|
| Brand                        | Optonica          | On/Off Cycles                            | 25 000x       |
| Product Code                 | DL12-B1           | Instant On                               | 0.1s          |
| Power                        | 12W               | Material                                 | Aluminium     |
| Energy Consumption           | 12 kWh/1000h      | Operating Frequency                      | 50-60 Hz      |
| Input voltage                | AC85-265V         | Temperature                              | -20°C / +40°C |
| Flux                         | 840 lm            | Ra ≥                                     | 80            |
| FLUX per watt                | 70lm/W            | Life span                                | 25 000 Hours  |
| IP                           | 20                | Lumen maintenance at end of service life | 70%           |
| Dimmable                     | No                | Size of product                          | 142x142x28mm  |
| Correlated Color Temperature | 3000K/4000K/6000K | Size of package                          | 165x30x165 mm |
| Light Color                  | CCT               | Items per pack                           | 1             |
| EAN Code                     | 3801057129167     | Items per box                            | 40            |
| Energy Efficiency Label      | G                 | Warranty                                 | 2 Years       |
| Beam angle                   | 120°              |                                          |               |