
OPTONICA

DATASHEET



## LED Backlit Panel 60x60 6000K CRI>80 - STARSENSE DRIVER

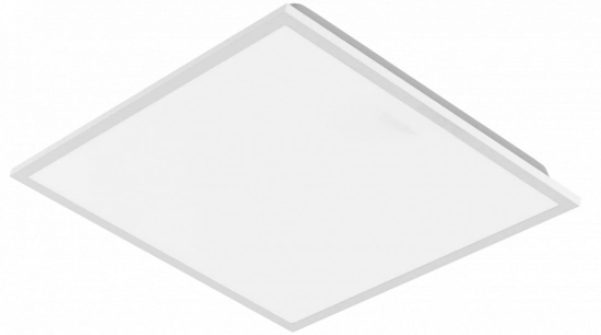

**Power**

30W

**Light color**

White light

**Stamps**

## Technical Specification

| | | | |
|---|---|---|---|
| **Brand** | Optonica | **On/Off Cycles** | 25 000x |
| **Product Code** | DL30-A3 | **Instant On** | 0.1s |
| **Power** | 30W | **Material** | Aluminium |
| **Energy Consumption** | 30 kWh/1000h | **Operating Frequency** | 50-60 Hz |
| **Input voltage** | AC220-240V | **Temperature** | -20°C / +40°C |
| **Flux** | 4200 lm | **Ra ≥** | 80 |
| **FLUX per watt** | 140 lm/W | **Life span** | 25 000 Hours |
| **IP** | 20 | **Lumen maintenance at end of service life** | 70% |
| **Correlated Color Temperature** | 6000K | **Size of product** | 595x595x33mm |
| **Light Color** | White light | **Size of package** | 610x370x635mm |
| **EAN Code** | 3801057127811 | **Items per pack** | 10 |
| **Energy Efficiency Label** | C | **Warranty** | 3 Years |
| **Beam angle** | 120º | | |