


# OPTONICA

## DATASHEET



### Panneau LED Sans Cadre Carré

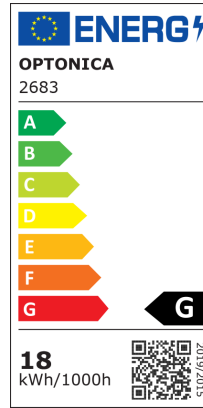

Puissance

18W

Couleur de lumière



Stamps



RoHS



-80



## Technical Specification

|                                     |                |   |                |
|-------------------------------------|----------------|---|----------------|
| <b>Brand</b>                        | Optonica       | <b>Instant On</b>                               | 0.1s           |
| <b>Product Code</b>                 | DL18-B2        | <b>Material</b>                                 | ALU+PC         |
| <b>Power</b>                        | 18W            | <b>Operating Frequency</b>                      | 50-60 Hz       |
| <b>Energy Consumption</b>           | 18 kWh/1000h   | <b>Temperature</b>                              | -20°C / +40°C  |
| <b>Input voltage</b>                | AC85-265V      | <b>Ra ≥</b>                                     | 80             |
| <b>Flux</b>                         | 1500 lm        | <b>Life span</b>                                | 25 000 Hours   |
| <b>FLUX per watt</b>                | 84lm/W         | <b>Color Code</b>                               | 826            |
| <b>IP</b>                           | 54             | <b>Body Color</b>                               | White          |
| <b>Dimmable</b>                     | No             | <b>Lumen maintenance at end of service life</b> | 70%            |
| <b>Correlated Color Temperature</b> | 2700K          | <b>Size of product</b>                          | 120x120x27 mm  |
| <b>Light Color</b>                  | Lumière chaude | <b>Size of package</b>                          | 173x35x164 mm  |
| <b>Wattage Equivalent</b>           | 100W           | <b>Size of Box</b>                              | 375x360x343 mm |
| <b>EAN Code</b>                     | 3800156626836  | <b>Items per pack</b>                           | 1              |
| <b>Energy Efficiency Label</b>      | G              | <b>Items per box</b>                            | 40             |
| <b>Beam angle</b>                   | 180°           | <b>Gross weight</b>                             | 0,252 kg       |
| <b>Hole Size</b>                    | 108x108 mm     | <b>Net weight</b>                               | 0,208 kg       |
| <b>On/Off Cycles</b>                | 25 000x        | <b>Warranty</b>                                 | 2 Years        |