




### Projecteur LED SMD IP65 Corps Noir avec Capteur

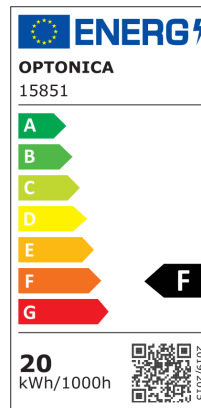

#### Puissance

20W

#### Couleur de lumière

Lumière blanche

#### Stamps



RoHS



-80



## Technical Specification

|                                     |                 |   |                         |
|-------------------------------------|-----------------|---|-------------------------|
| <b>Brand</b>                        | Optonica        | <b>Temperature</b>                              | -20°C / +40°C           |
| <b>Product Code</b>                 | FL20-B3         | <b>Life span</b>                                | 25 000 Hours            |
| <b>Power</b>                        | 20W             | <b>Body Color</b>                               | Black                   |
| <b>Energy Consumption</b>           | 20 kWh/1000h    | <b>LED Type</b>                                 | SMD                     |
| <b>Input voltage</b>                | AC85-265V       | <b>Lumen maintenance at end of service life</b> | 70%                     |
| <b>Flux</b>                         | 1800 lm         | <b>Size of product</b>                          | 126 x 114 x 27 mm       |
| <b>FLUX per watt</b>                | 90lm/W          | <b>Size of package</b>                          | 13x5x15.7cm             |
| <b>IP</b>                           | 65              | <b>Size of Box</b>                              | 52.5x27x18cm            |
| <b>Dimmable</b>                     | No              | <b>Items per pack</b>                           | 1                       |
| <b>Correlated Color Temperature</b> | 6000K           | <b>Items per box</b>                            | 20                      |
| <b>Light Color</b>                  | Lumière blanche | <b>Cable</b>                                    | 15 cm                   |
| <b>EAN Code</b>                     | 3801057158518   | <b>Detection Distance</b>                       | 8 M                     |
| <b>Energy Efficiency Label</b>      | F               | <b>Sensitivity angle</b>                        | 120 degree              |
| <b>Beam angle</b>                   | 120°            | <b>Gross weight</b>                             | 0,303 kg                |
| <b>On/Off Cycles</b>                | 25 000x         | <b>Net weight</b>                               | 0,253 kg                |
| <b>Instant On</b>                   | 0.1s            | <b>Time Function</b>                            | 12sec-7min - adjustable |
| <b>Operating Frequency</b>          | 50-60 Hz        | <b>Warranty</b>                                 | 2 Years                 |