
# OPTONICA

DATASHEET



## Montaggio a stecche LED IP20

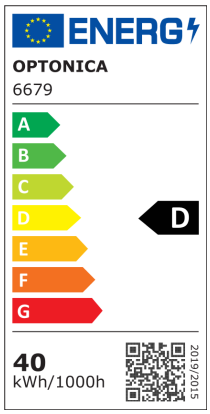


**Potenza**

40W

**Colore della luce**

Luce calda

**Stamps**

CE RoHS

## Specifiche tecniche

| | | | |
|---|---|---|---|
| **Brand** | Optonica | **Instant On** | 100% - 0.1s |
| **Product Code** | OT40-A4 | **Material** | ALU+PC |
| **Power** | 40W | **Operating Frequency** | 50-60 Hz |
| **Energy Consumption** | 40 kWh/1000h | **Temperature** | -20°C / +40°C |
| **Input voltage** | AC220-240V | **Ra ≥** | 80 |
| **Flux** | 5360 lm | **Life span** | 25 000 Hours |
| **FLUX per watt** | 134 lm/W | **Color Code** | 830 |
| **IP** | 20 | **Lumen maintenance at end of service life** | 70% |
| **Dimmable** | No | **Size of product** | 1220x69x25 mm |
| **Correlated Color Temperature** | 3000K | **Size of package** | 1225x75x28 mm |
| **Light Color** | Luce calda | **Items per pack** | 1 |
| **EAN Code** | 3800156666795 | **Items per box** | 40 |
| **Energy Efficiency Label** | D | **Gross weight** | 0,332 kg |
| **Beam angle** | 120º | **Net weight** | 0,265 kg |
| **Power Factor** | 0.5 | **Warranty** | 2 Years |
| **On/Off Cycles** | 25 000x | | |