


### Weißer Außenlichterkette Bunte Glühbirnen 10PCS 5M + 3M Cable

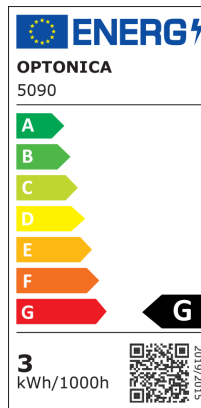

#### Leistung

3W

#### Lichtfarbe

Kein, Keines, Keine

#### Stamps



## Technische Spezifikation

|                                |                     |   |                      |
|--------------------------------|---------------------|---|----------------------|
| <b>Brand</b>                   | Optonica            | <b>Temperature</b>                              | -20°C / +40°C        |
| <b>Product Code</b>            | OT1-A4              | <b>Life span</b>                                | 25 000 Hours         |
| <b>Power</b>                   | 3W                  | <b>Body Color</b>                               | White                |
| <b>Input voltage</b>           | AC220-240V          | <b>Lumen maintenance at end of service life</b> | 70%                  |
| <b>Flux</b>                    | 150 lm              | <b>Size of product</b>                          | 5M + 3M Power Cable  |
| <b>FLUX per watt</b>           | 50lm/W              | <b>Size of package</b>                          | 280x190x100 mm       |
| <b>IP</b>                      | 65                  | <b>Items per pack</b>                           | 1                    |
| <b>Light Color</b>             | Kein, Keines, Keine | <b>Items per box</b>                            | 10                   |
| <b>EAN Code</b>                | 3800156650909       | <b>Color Of The Shell</b>                       | White                |
| <b>Energy Efficiency Label</b> | G                   | <b>Operating Voltage</b>                        | 24V adapter operated |
| <b>Power Factor</b>            | 0.9                 | <b>Gross weight</b>                             | 0,738 kg             |
| <b>On/Off Cycles</b>           | 25 000x             | <b>Net weight</b>                               | 0,541 kg             |
| <b>Instant On</b>              | 0.1s                | <b>Warranty</b>                                 | 2 Years              |
| <b>Operating Frequency</b>     | 50-60 Hz            |   |                      |