
OPTONICA

DATASHEET



Luce Stradale LED BRIDGELUX3030

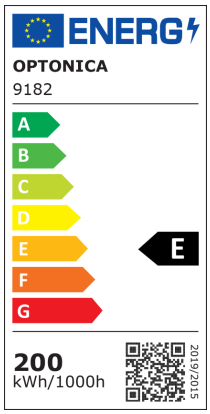

Potenza

200W

Colore della luce

Luce fredda

Stamps

CE RoHS -80

Specifiche tecniche

Brand	Optonica	**Instant On**	0.1s
Product Code	SL200-A3	**Material**	Aluminium
Power	200W	**Operating Frequency**	50-60 Hz
Energy Consumption	200 kWh/1000h	**Temperature**	-20°C / +40°C
Input voltage	AC220-240V	**Ra ≥**	70
Flux	19000 lm	**Life span**	50 000 Hours
FLUX per watt	95 lm/W	**Color Code**	857
IP	65	**LED Type**	Bridgelux
Dimmable	No	**Lumen maintenance at end of service life**	70%
Correlated Color Temperature	6000K	**Size of product**	705x365x156 mm
Light Color	Luce fredda	**Size of package**	710x370x230 mm
EAN Code	3800156691827	**Items per pack**	1
Energy Efficiency Label	E	**Items per box**	1
Beam angle	120º	**Rated Current**	0.75A
Hole Size	Ø65 mm	**Gross weight**	9,400 kg
Power Factor	0.95	**Net weight**	8,5455 kg
On/Off Cycles	35 000x	**Warranty**	5 Years