

OPTONICA

CATALOGUE
2027



OPTONICA is a leading European company specializing in advanced LED LIGHTING and SOLAR ENERGY solutions. Established in 2011 in Bulgaria, OPTONICA has grown from a dynamic trading company into a recognized and trusted partner across the global market. Through continuous development, strong partnerships, and a clear focus on innovation, we have built a solid reputation as a supplier and distributor of modern technologies designed for a more efficient and sustainable future.

Our extensive product portfolio includes a wide range of LED lighting solutions, solar panels, energy storage batteries, inverters, and complete photovoltaic systems for residential, commercial, industrial, and public applications. From energy-efficient lighting for homes, offices, hotels, retail spaces, public buildings, industrial facilities, and outdoor environment to complete solar energy solutions for private properties, businesses, large-scale projects, and off-grid systems, OPTONICA provides reliable technologies for a broad spectrum of applications.

We work closely with carefully selected internationally recognized manufacturers and technology partners in order to offer our customers access modern, high-performance products that meet the evolving demands worldwide. Our huge stock availability, efficient logistics, professional technical support, and experienced team allow us to provide fast and dependable service to customers, installers, distributors, and business partners.

Quality, innovation, and long-term reliability are at the core of everything we do. We are committed to offering products that combine high performance, energy efficiency, modern design, and sustainable technology. Our complete range of solar panels, batteries and inverters is developed to support the growing transition toward energy independence, while our LED lighting solutions help reduce energy consumption and create safer, smarter, and more comfortable environment.

With an expanding presence across Europe, OPTONICA continues to strengthen its position as a leading company in the domain of LED lighting and renewable energy. Our ambition is not only to follow technological progress, but to pro-actively contribute to it by delivering solutions that create measurable value for our customers and partners.

We believe that the future is powered by efficient, intelligent, and environmentally responsible technologies. By combining our expertise in LED lighting, solar energy, battery storage, and inverter systems, OPTONICA is committed to helping homes, businesses, and communities achieve greater energy efficiency, lower operating costs, and a more sustainable way of living.

**LIGHTING THE FUTURE.
POWERING TOMORROW.**




Solar Systems

04 - 45




LED Bulbs & Spotlights

46 - 79




Spotlight Fixtures

80-96



LED Pendants & Fans

97-133

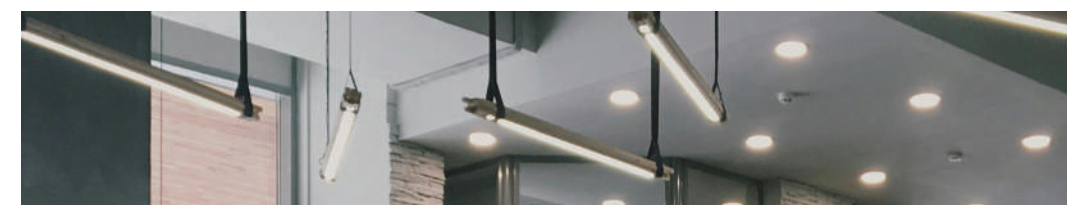


LED Tubes & Fixtures

134-147



LED Emergency Lighting

148-153

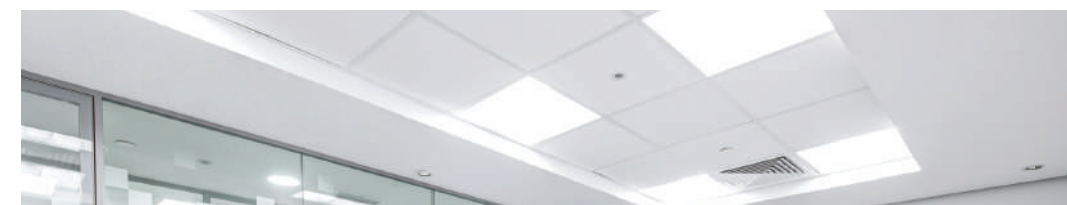

LED Panels

154-165

	LED Surface & Mini Panels 166-179
	LED Ceiling Lights 180-209
	LED Downlights 210-218
	LED Strips & Flex Neon 220-249
	Strip Accessories and Profiles 250-257
	LED Power Supplies 258-269
	LED Controllers 270-296

	LED Linear & Track Lights 296-341
	LED Floodlights 342-359
	LED Street & Industrial Lights 360-377
	LED Wall & Step Lights 378-393
	LED Outdoor & Garden Lights 394-415
	Sensors 416-421
	Miscellaneous and Comfort Products 422-440



What components make up a solar panel system?

Solar panel installations are very straightforward systems. There are only four main components to any solar panel system, and no moving parts, making them very efficient to install and maintain. The four components of a solar panel system are:

Solar photovoltaic panels - to convert solar energy into electricity

Battery - to store DC electricity

Inverters - to convert DC electricity into AC electricity

Racking and mounting systems - to affix your solar panels to your roof (or to the ground, depending upon your installation type)

Performance monitoring systems - to track and monitor the output and health of your solar panels and inverters

DESIGN AND CONSTRUCTION OF SOLAR POWER SYSTEMS

The photovoltaic panels we offer are designed to be highly efficient and with long service life, which makes them a great choice for those who want yet to invest in renewable energy for homes or your business.

Green energy solutions



How does solar power work?

Solar power works by converting energy from the sun into power. There are two forms of energy generated from the sun for our use – electricity and heat.

Both are generated through the use of solar panels, which range in size from residential rooftops to 'solar farms' stretching over acres of rural land.

Is solar power a clean energy source?

Yes, solar power is a renewable and infinite energy source that creates no harmful greenhouse gas emissions – as long as the sun continues to shine, energy will be released.

The carbon footprint of solar panels is already quite small, as they last for 25 years plus with no loss in efficiency. And the materials used in the panels are increasingly recycled, so the carbon footprint will continue to shrink.

When was solar power discovered?

Solar energy was used by humans as early as the 7th century B.C., when humans used sunlight to light fires by reflecting the sun's rays onto shiny objects. Later, in 3rd century B.C., the Greeks and Romans harnessed solar power with mirrors to light torches for religious ceremonies.

In 1839 and at the age of just 19, French physicist Edmond Becquerel discovered the photovoltaic (PV) effect while experimenting with a cell made of metal electrodes in a conducting solution. He noted that the cell produced more electricity when it was exposed to light – it was a photovoltaic cell.


In 1954 PV technology was born when Daryl Chapin, Calvin Fuller and Gerald Pearson developed the silicon PV cell at Bell Labs in 1954 – the first solar cell capable of absorbing and converting enough of the sun's energy into power to run everyday electrical equipment. Today satellites, spacecraft orbiting Earth, are powered by solar energy.

How exactly is electricity from solar energy produced?

Solar panels are usually made from silicon installed in a metal panel frame with a glass casing. When photons, or particles of light, hit the thin layer of silicon on the top of a solar panel, they knock electrons off the silicon atoms.

This PV charge creates an electric current (specifically, direct current or DC), which is captured by the wiring in solar panels. This DC electricity is then converted to alternating current (AC) by an inverter. AC is the type of electrical current used when you plug appliances into normal wall sockets.

HYBRID SOLAR AIR CONDITIONERS
 NEW
 AC/DC - R32
 *PV Solar Panels NOT Included

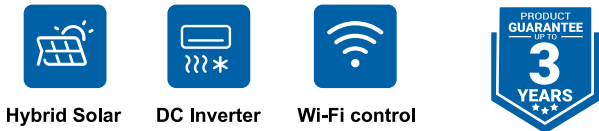

Deye


R32



SKU	9801	DGWA5-ACDCBLW-12KR2	DEYE HYBRID SOLAR/ACDC AIR CONDITION 12000BTU WIFI-CONTROL
SKU	9802	DGWA5-ACDCBLW-18KR2	DEYE HYBRID SOLAR/ACDC AIR CONDITION 18000BTU WIFI-CONTROL
SKU	9803	DGWA5-ACDCBLW-24KR2	DEYE HYBRID SOLAR/ACDC AIR CONDITION 24000BTU WIFI-CONTROL


Build in Solar MPPT

- Intelligent control for detection and adjustment
- Efficiency:99.9%
- DC to DC 0 convert lose
- 10+ years life design

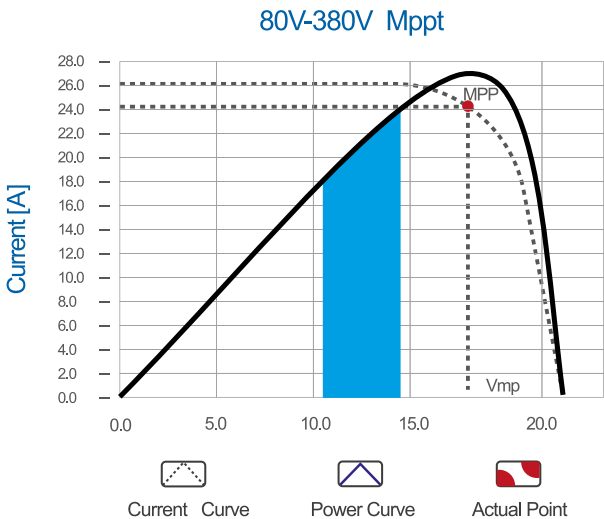

MODEL	
Power supply AC	Ph - V - Hz
Power DC, PV Series connection	Max.PV Input Voltage (V)
	Start-up Voltage (V)
	MPPT Voltage Range (V)
	Full Load MPPT Voltage (V)
	Max.Input Short Circuit Current (A)
	Max.Operating PV InputCurrent (A)
	No of MPP Trackers/No. ofStrins per MPP Tracker
Cooling Capacity	W
Cooling power input	W
Heating Capacity	W
Heating power input	W
EER	W/W
Indoor unit Dimension	(WxHxD) mm
Indoor unit Packing	(WxHxD) mm
Outdoor unit Dimension	(WxHxD) mm
Outdoor unit Packing	(WxHxD) mm

	12K	18K	24K
	DGWA5-ACDCBLW-12KR2	DGWA5-ACDCBLW-18KR2	DGWA5-ACDCBLW-24KR2
	208V-240V / 50-60Hz		
	380	380	410
	80	80	140
	75-360	75-360	120-360
	200-360	200-360	240-360
	20	20	20
	13	13	15
	1/1	1/1	1/1
	3500(800-3900)	5150(1200-5600)	6400(1800-7800)
	920(140-1150)	1430(220-2000)	1690(340-2550)
	4000(900-4400)	5150(1200-5300)	7030(1800-7800)
	1020(150-1350)	1340(220-1450)	1780(320-2190)
	3.80	3.60	3.79
	840x205x295	95x310x230	1080x330x237
	920x290x360	1045x376x326	1140x362x300
	802x564x323	802x564x323	900x700x337
	910x622x405	910x622x405	1006x755x418



- 100% Eco
Up to 100% Savingin day time
- Savings
No Inverter battery,or Charger controller needed
- Max Efficiency
DC-driven

- Grid AC Power Limiter
Limit AC power from 0-300W
- Wide Operating Temperature
Temperature Range between -10 to +60°C
- Auto Balance
AC/DC auto balance



HYBRID SOLAR MULTI-SPLIT SYSTEMS

NEW

AC/DC - R32

*PV Solar Panels NOT Included

Deye



INDOOR UNIT

SKU	9823	DMGA1-ACDC-12KR2	DEYE HYBRID SOLAR/ACDC MULTI ZONE 12000BTU WIFI-CONTROL
-----	------	------------------	---

OUTDOOR UNIT

SKU	9821	DW3B1-ACDC-27KR2	DEYE HYBRID SOLAR/ACDC MULTI ZONE 27000BTU WIFI-CONTROL
SKU	9822	DW4E1-ACDC-36KR2	DEYE HYBRID SOLAR/ACDC MULTI ZONE 36000BTU WIFI-CONTROL



Hybrid Solar



Build in Solar MPPT



180° sine wave
controller technology



Auto restart



Max Efficiency
DC - driven



Preheat Functioni



Hybrid Solar



WiFi Control



Energy Saving



100% Eco Up to
100% Saving in day time

Outdoor Unit

DC INVERTER MODEL		
System Format		
Power supply AC		V/ Ph / Hz
Power Supply DC PV String Input Data	Voc	
	Max PY (DC) Input Current (A)	
	Max PY ISC(A)	
	No of MPP Trackers	
	No of Strings per MPP Tracker	
Capacity	Cooling	BTU/h
		kW
	Heating	BTU/h
		kW
Electric Data	Cooling Power Input	
	W	
	Heating Power Input	
	W	
	Rated Current (cooling)	
Performance	SEER/SCOP	
	W/W	
	Energy Rate	
	EER/COP	
	W/W	
Performance	Sound Pressure Noise Level	
	dB(A)	
Performance	Sound Power Noise Level	
	dB(A)	
Performance	Net(W+D+H)	
	mm	
Performance	Packing (W+D+H)	
	mm	
Weight	Net/Gross	
	kg	

27K

DW3B1-ACDC-27KR2 (EU)
Max indoor 12k -2pcs
AC220-240/1/50
DC 100-410V
14A
22A
1
1
27000 (7800-29700)
7 9 (2 3-8 70)
28000 (8400-31000)
8 2 (2 46-9 09)
2440 (5603400)
2210 (560-3400)
10.72
9.71
6.1/4.0
A++/A+
3.23/3.71
58
68
888x318x700
1006x418x755
52.5/56.5

36K

DW4E1-ACDC-36KR2 (EU)
Max indoor 12k -3pcs
AC220-240/1/50
DC100-400/1/50
14+14A
22+22A
2
1
35800 (8500-41300)
10 5 (2 5-121)
37500 (9100-41000)
110 (267-12 0)
3250 (6803750)
2890 (530-3200)
14.28
12.71
6.15/4.0
A++/A+
3.23/3.80
60
70
942x375x844
1085x430x1035
87/74

Indoor Unit


Model		
Capacity	Cooling	BTU/h
	Heating	BTU/h
Electric Data	Power Supply	V
	Power Input	W
Performance	Air Flow Volume	CFM
		m3/h
Performance	Power Input	dB(A)
Dimension	Net(W+H+ D)	mm
	Packing(W+H+D)	mm
Weight	Net	kg
	Gross	kg
Pipe Diameter	Liquid Side	mm
	Gas Side	mm
	Drainage	mm

12K

DMGA1-ACDC-12KR2(EU)
12000
12300
DC 290-380V
20
365
620
42.5
840x205x295
920x290x360
9.5
11.8
6.35(1/4)
9.52(3/8)
16.9


27K Outdoor 3 Zones Indoor Max			
1 Unit	2 Units	3 Units	
18	12+12	9+9+9	
-	12+18	9+9+19	
-	18+18	12+12+12	

36K Outdoor 4 Zones Indoor Max			
2 Unit	3 Units	4 Units	
12+12	12+12+12	9+9+9+9	
12+18	12+12+18	12+12+12+12	
12+24	12+12+24	12+12+12+18	

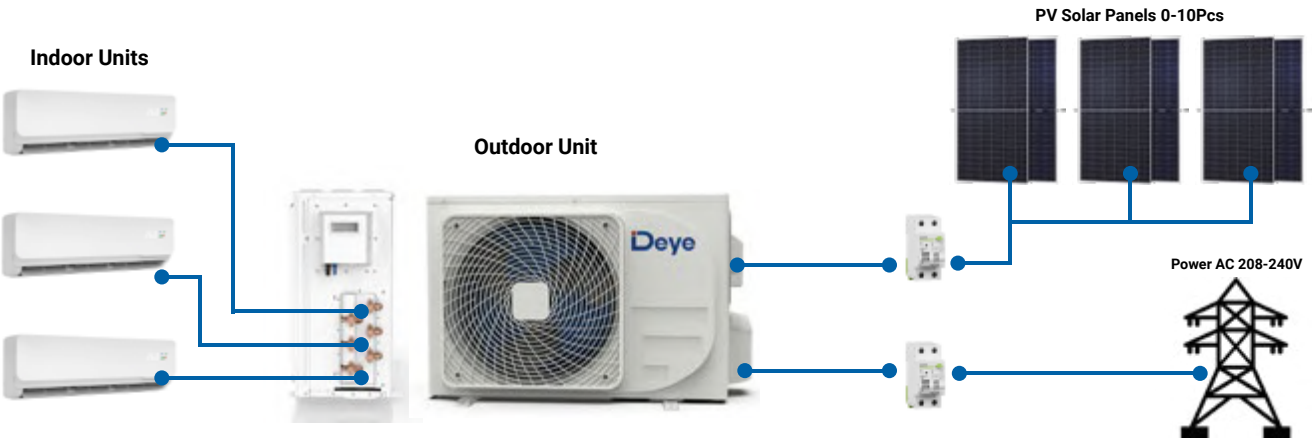

SOLAR HEAT PUMP HYBRID AC/DC
 MONOBLOCK - R290

*PV Solar Panels NOT Included

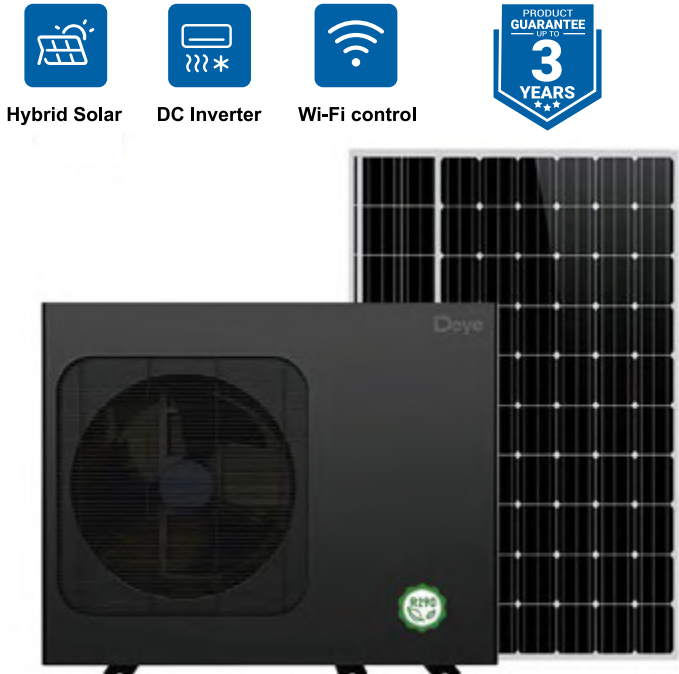

Build in Solar MPPT

High-Efficiency EER A+++

A solar heat pump monoblock (Hybrid ACDC) is an advanced heating and cooling system that integrates solar energy with heat pump technology in a single, compact unit. It is used for various applications, primarily focusing on energy-efficient heating and cooling solutions for residential and commercial buildings.

SKU	9851	DAWG1-ACDC-083EP	AIR TO WATER HEAT PIMP R290 / 8KW - 1 Phase
SKU	9852	DAWG1-ACDC-10R3EP	AIR TO WATER HEAT PIMP R290 / 10KW - 1 Phase
SKU	9853	DAWG1-ACDC-12R3EP	AIR TO WATER HEAT PIMP R290 / 12KW - 1 Phase
SKU	9854	DAWG1-ACDC-16R3EP	AIR TO WATER HEAT PIMP R290 / 16KW - 1 Phase
SKU	9855	DAWG1-ACDC2-12R3EP	AIR TO WATER HEAT PIMP R290 / 12KW - 3 Phase
SKU	9856	DAWG1-ACDC2-16R3EP	AIR TO WATER HEAT PIMP R290 / 16KW - 3 Phase

- Space Heating:**
- Provides efficient heating for residential and commercial buildings.
 - Suitable for underfloor heating, radiators, and fan coils.
- Cooling:**
- Can also function as an air conditioner, providing cooling during warmer months.
- Domestic Hot Water:**
- Heats water for domestic use, including showers, baths, and household chores.
- Integrated Solar Panels:**
- Equipped with solar panels to harness solar energy, reducing reliance on grid electricity.
- Monoblock Design:**
- All components, including the compressor, evaporator, condenser, and expansion valve, are contained in a single unit.
 - Compact design simplifies installation and maintenance.
- Inverter Technology:**
- Uses inverter technology to adjust the compressor speed according to demand, improving energy efficiency and reducing operational costs.




Hybrid Solar


DC Inverter


Wi-Fi control


3 YEARS

		8kW	10kW	12kW	16kW	12kW	16kW
MODEL		DAWG1-ACDC-083EP	DAWG1-ACDC-083EP	DAWG1-ACDC-083EP	DAWG1-ACDC-083EP	DAWG1-ACDC-083EP	DAWG1-ACDC-083EP
Power supply AC		AC 220-240/1Ph 50/60Hz			AC 380-415/3Ph 50/60Hz		
Cooling (A35W18)	Capacity KW	8.3	10	12	16	12	16
	Rated Input KW	1.63	2.11	2.67	4.10	2.67	4.10
	EER	5.15	4.75	4.50	3.90	4.50	3.90
Cooling (A35W7)	Capacity KW	7.5	8.9	11.5	14.0	11.5	14
	Rated Input KW	2.17	2.74	3.77	5.09	3.77	5.09
	EER	3.45	3.25	3.05	2.75	3.05	2.75
Heating (A7W35)	Capacity KW	8.4	10	12	15.0	12	15
	Rated Input KW	1.68	2.13	2.50	3.41	2.50	3.41
	COP	5.00	4.70	4.80	4.40	4.80	4.40
Heating (A7W45)	Capacity KW	8.2	10	12	15.0	12	15.0
	Rated Input KW	2.13	2.74	3.24	4.48	3.24	4.48
	COP	3.85	3.65	3.70	3.35	3.70	3.35
Heating (A7W535)	Capacity KW	7.8	9.5	12	15.0	12	15
	Rated Input KW	2.44	3.11	3.87	5.26	3.87	5.26
	COP	3.20	3.05	3.10	2.85	3.10	2.85
Seasonal efficiency class	LWT at 35°	A+++	A+++	A+++	A+++	A+++	A+++
	LWT at 55°	A+++	A+++	A+++	A++	A+++	A++
ErP sound power	Monobloc dB	56	57	57	58	57	58
Net dimension	WxDxH mm	1283x455x1036		1283x455x1036		1283x455x1036	
Packing dimension	WxDxH mm	1360x545x1222		1360x545x1222		1360x545x1222	
Net weight	Monobloc kg	150		167		187	
Gross weight	Monobloc kg	174		191		210	
Refrigerant	Type /GWP	R290/3					
	Colume kg	1.1		1.43		1.43	
MAX Power Input	kW	2.9	3.4	4.8	5.9	4.8	5.9
Operating ambien temp. range	Cooling C°	-5 / 48					
	Heating C°	-25 / 35					
	DHW(tank) C°	-25 / 43					
Setting water temp. range	Cooling C°	10~30(LWT 5~25)					
	Heating C°	25 ~ 80					
	DHW(tank) C°	25 ~ 75					
Water circuit	Piping con. inch	G1-1/4"					
	Valve Pressure MPA	0.3					
	Flow switch m3/h	0.36		0.6			
	Expansion tank volume L	5					
	Capacity of the back-up heater KW	3		3		9	


All DC Inverter


Automatic Water Temp. Adjustment


R290 ECO


Wi-Fi


Security (Leakage Control)

Smart Heating.
 Smart Control.

With the DEYE Cloud Services App, you gain a unified view of your entire home's energy ecosystem.Monitor heating performance, fine-tune room temperature and hot-water settings, and automate daily heating and cooling routines with ease. Powered by intelligent energy scheduling, the system dynamically allocates power between PV, battery storage, and home loads—maximizing efficiency, lowering energy costs, and ensuring comfort around the clock.



PV SOLAR PANELS

NEW

OSDA Bifacial Solar Panel N-Type



	N-Type Topcon 590Wp	N-Type Topcon 620Wp	N-Type Topcon 720Wp	N-Type Topcon 720Wp
PV Model	ODA590-36V-MHD	ODA620-33V-MHDRz	ODA720-33V-MHD	ODA730-33V-MHD
Rated Max Power	590Wp	620Wp	720Wp	730Wp
Voltage Pmax Vmp	44.87V	40.74V	41.00V	41.25V
Current Pmax IMP	13.15A	15.29A	17.56A	17.70A
Open-Circuit Current Voc	52.79V	49.28V	49.10V	49.4V
Short-Circuit Current Isc	13.97A	16.08A	18.56A	18.71A
Maximum Voltage	1500V	1500V	1500V	1500V
Maximum Fuse Rating	25A	35A	30A	30A
Module Efficiency STC	22.84%	23%	23.18%	23.5%
Dimmensions	2278x1134x30mm	2382x1134x30mm	2384x1303x33mm	2384x1303x33mm
SKU	9704	9408	9707	9711

PV SOLAR PANELS


NEW

Monocrystalline - MC4 Cables



	LONGI Solar Panel Silver Frame 450Wp
PV Model	LR4-72HPH-450M
Rated Max Power	450Wp
Voltage Pmax Vmp	41.5V
Current Pmax IMP	10.85A
Open-Circuit Current Voc	49.3V
Short-Circuit Current Isc	11.6A
Maximum Voltage	1500V
Maximum Fuse Rating	20A
Module Efficiency STC	20.7%
Dimmensions	2094x1038x35mm
SKU	9708

LONGI

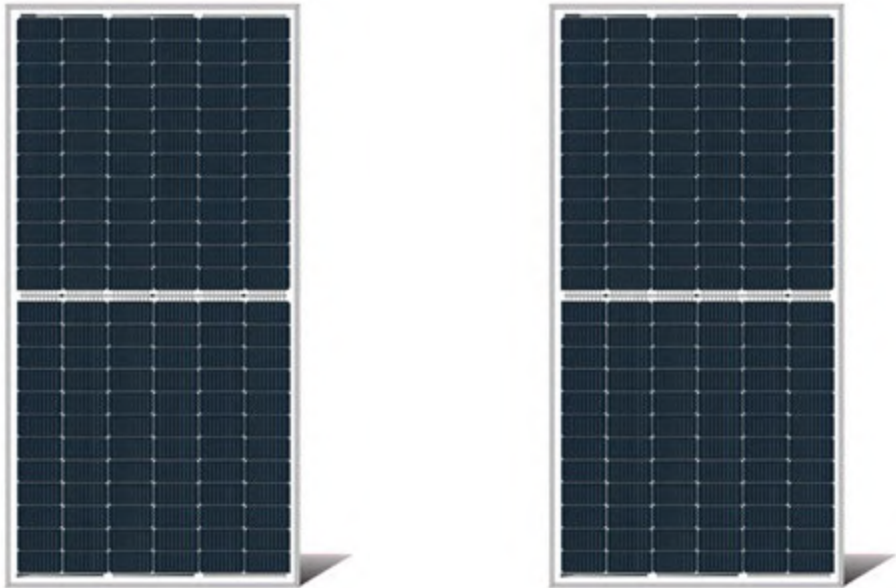

PV SOLAR PANELS

NEW

Monocrystalline - MC4 Cables



LONGI Solar Panel
Silver Frame 450Wp



LONGI Solar Panel
Silver Frame 455Wp

PV Model	LR4-72HPH-450M	LR4-72HPH-455M
Rated Max Power	450Wp	455Wp
Voltage Pmax Vmp	41.5V	41.7V
Current Pmax IMP	10.85A	10.92A
Open-Circuit Current Voc	49.3V	49.5V
Short-Circuit Current Isc	11.6A	11.66A
Maximum Voltage	1500V	1500V
Maximum Fuse Rating	20A	20A
Module Efficiency STC	20.7%	20.9%
Dimmensions	2094x1038x35mm	2094x1038x35mm
SKU	9706	9709

SKU 9451
PV Cable - 100m - 4mm²



SKU 9453
PV Cable - 100m - 6mm²



SKU 9452
PV Cable - 100m - 4mm²



SKU 9454
PV Cable - 100m - 6mm²



SKU 9459
Grounding Cable - 100m - 4mm²



SKU 9433
1.5M 4MM2 WITH MC4



SKU 9457
Y-BRANCH 1500V, 30A -3Y



SKU 9458
Y-BRANCH 1500V, 30A -4Y



SKU 9455
MC4 1to1 1000v, 30A



SKU 9456
MC4 1to1 1500v, 30A



SKU 9434
END CAP FOR MALE CONNECTOR



SKU 9432
BC01 AND SCHUKO PLUG




MICRO INVERTER


OUTPUT - 600W

Model: SUN600G3-EU-230
Input: 2*MC4 / PV 2*210-400W
Output: 230Vac 600W
MPPT: 25-55V 2*13A
Unit: 212x230x40mm 3.15kg

SKU 9431

Deye

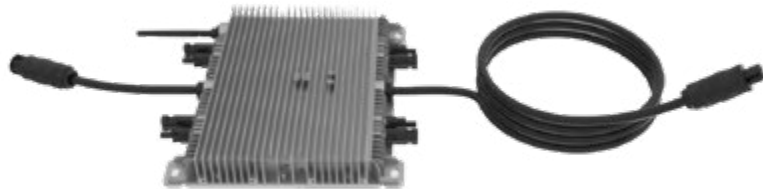

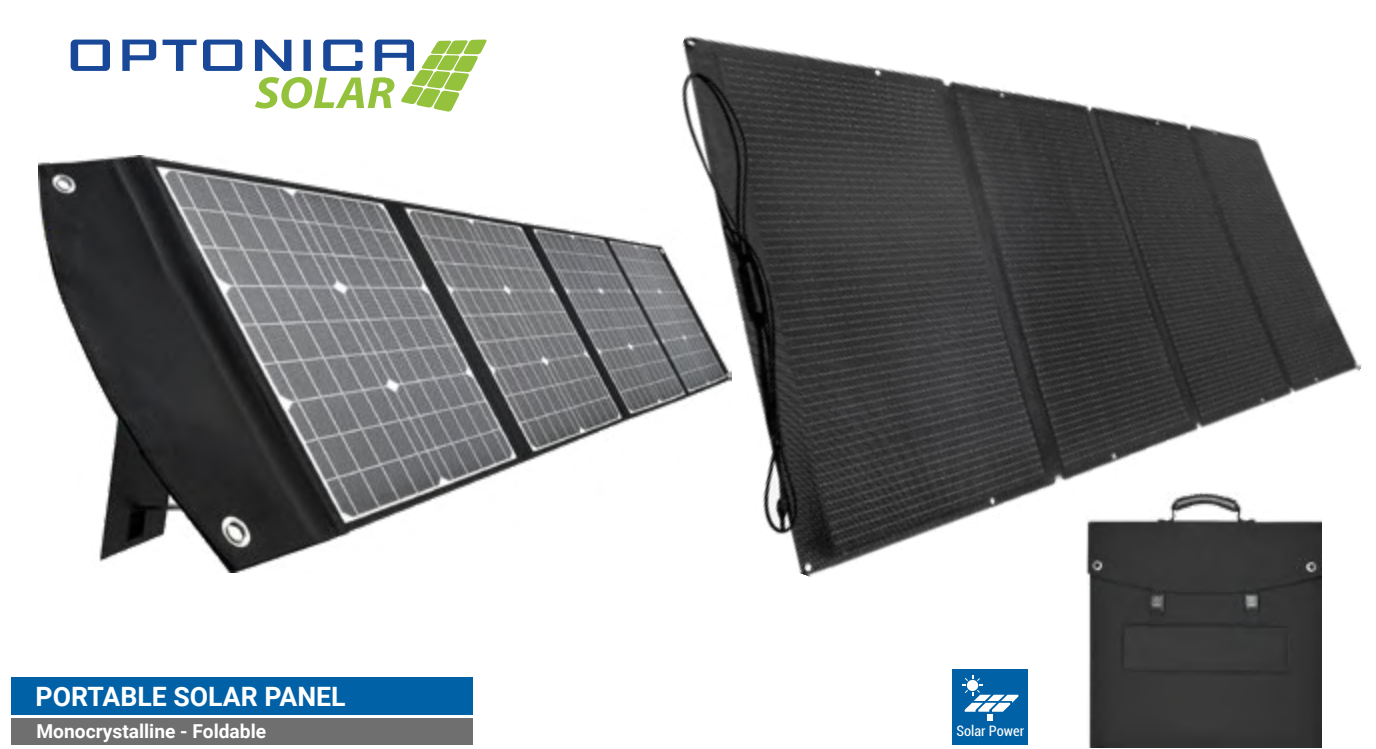

PORTABLE SOLAR PANEL
Monocrystalline - Foldable

Power	120Wp	200Wp	400Wp
Output 1	MC4 18V/6.6A Max	MC4 18V/11.1A Max	MC4 36V/6.6A Max
Output 2	USB-A QC 3.0 24W Max	USB-A QC 3.0 24W Max	-
Output 3	Type-C PD45W Max	Type-C PD45W Max	-
Material	ETFE-Film	ETFE-Film	ETFE-Film
			Intelligent charging chip

SKU	9400	9401	9402
Power	120Wp	200Wp	400Wp




SKU	9424	SKU	9425	SKU	9426	SKU	9427
MC4 Convert to Anderson		MC4 Convert to DC5525		Anderson convert to DC5525		Y Branch Connector 1 to 2 MC4Y2	



HYBRID INVERTERS
Low Voltage - ONE PHASE



	6KW SUN-6K SG06LP1-EU-BM2	8KW SUN-8K SG06LP1-EU-BM3	10KW SUN-10K SG06LP1-EU-BM3	12KW SUN-12K SG06LP1-EU-BM3
Model				
Battery Voltage Range (V)	40-60	40-60	40-60	40-60
Max. Charging Current (A)	135	185	220	250
Max. DC Input Power (W)	9600	12800	16000	19200
Start-up Voltage (V)	125	125	125	125
MPPT Range (V)	150-425	150-425	150-425	150-425
Rated PV Input Voltage (V)	370	370	370	370
Max. Operating PV Input Current (A)	18+18	36+18+18	36+36+18	36+36+18
Max. Input Short-Circuit Current (A)	27+27	54+27+27	54+54+27	54+54+27
No.of Strings per MPP Tracker	2/1+1	3/2+1+1	3/2+2+1	3/2+2+1
Rated AC Output Power (W)	6000	8000	10000	12000
Rated AC Input/Output Current (A)	18.2/17.4	36.4/34.8	45.5/43.5	54.6/52.2
Max. AC Input/Output Current (A)	20/19.2	40/38.3	50/47.9	60/57.4
Grid Type	One Phase	One Phase	One Phase	One Phase
Max. Efficiency	97.6%	97.6%	97.6%	97.6%
MPPT Efficiency	99.90%	>99%	>99%	>99%
SKU	9740	9741	9742	9743

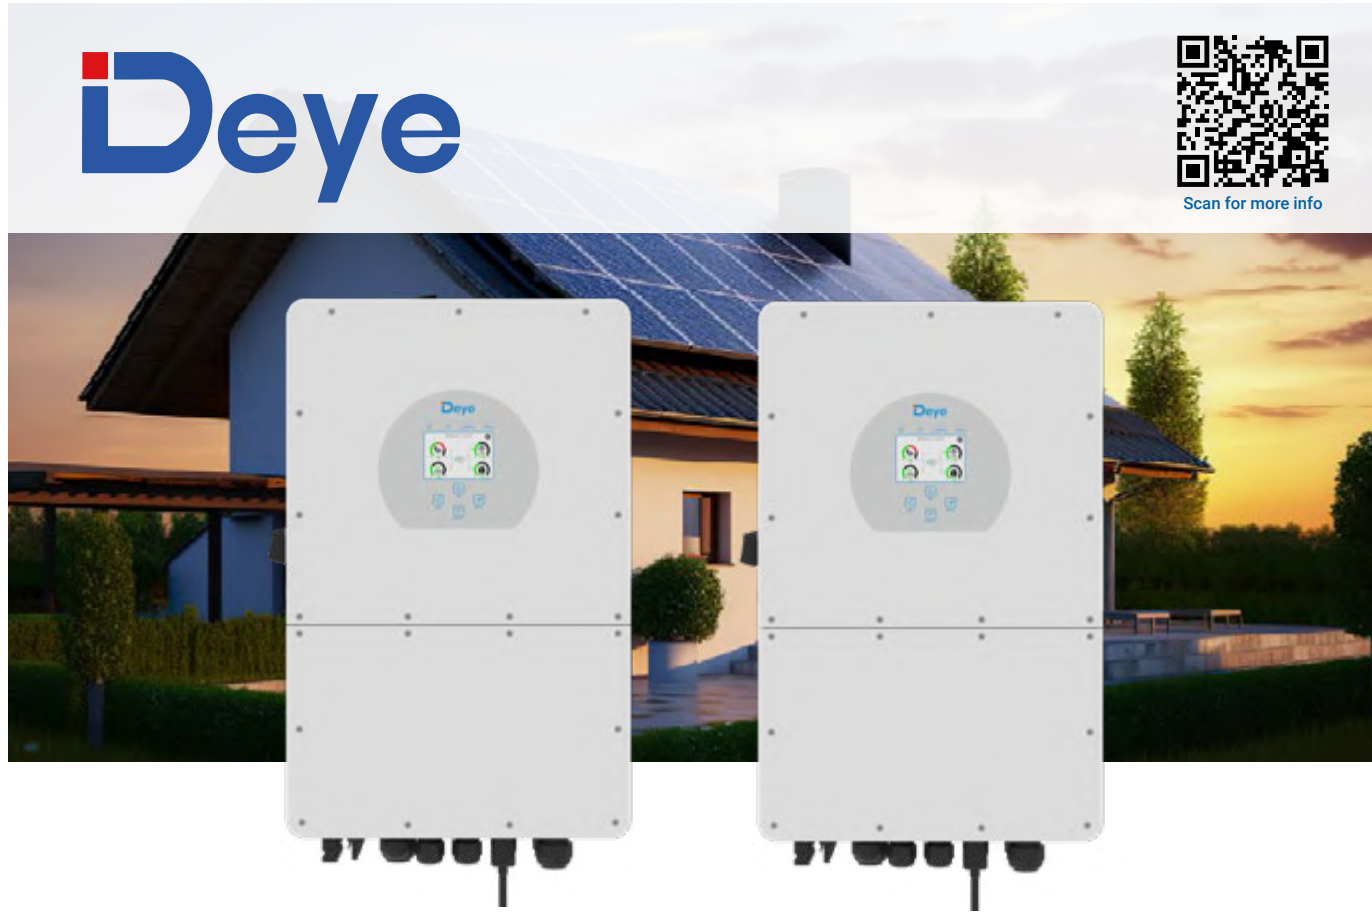


HYBRID INVERTERS
High Voltage - THREE PHASE



	10KW	15KW	20KW	25KW	30KW
Model	SUN-10K-SG01-HP3-EU-DM2	SUN-15K-SG01HP3-EU-AM2	SUN-20K-SG01HP3-EU-AM2	SUN-25K-SG01-HP3-EU-AM2	SUN-30K-SG02-HP3-EU-AM3
Battery Voltage Range (V)	160~700	160~700	160~700	160~700	160~800
Max. Charging Current (A)	37	37	37	50	50+50
Max. DC Input Power (W)	13000	19500	26000	40000	39000
Start-up Voltage (V)	180	180	180	180	180
MPPT Range (V)	150-850	150-850	150-850	150-850	150-850
No.of MPP Trackers	2	2	2	3	3
Full Load DC Voltage (V)	325-850	420-850	500-850	700	360-850
PV Input Current (A)	20+20	26+20	26+26	26+26	36+36+36
No.of Strings per MPP Tracker	1+1	2+1	1+2	2/2+2	2+2+2
Rated AC Output Power (W)	10000	15000	20000	25000	30000
AC Output Rated Current (A)	15.2/14.5	22.8/21.8	30.4/29	37.9/36.3	45.5/43.5
Max. AC Output Current (A)	16.7/16	25/24	33.4/31.9	41.7/39.9	50/47.8
Grid Type	Three Phase	Three Phase	Three Phase	Three Phase	Three Phase
Max. Efficiency	97.6%	97.6%	97.6%	97.6%	97.6%
MPPT Efficiency	99.90%	99.90%	99.90%	99.90%	99.90%

SKU	9448	9449	9442	9755	9443
				NEW	NEW

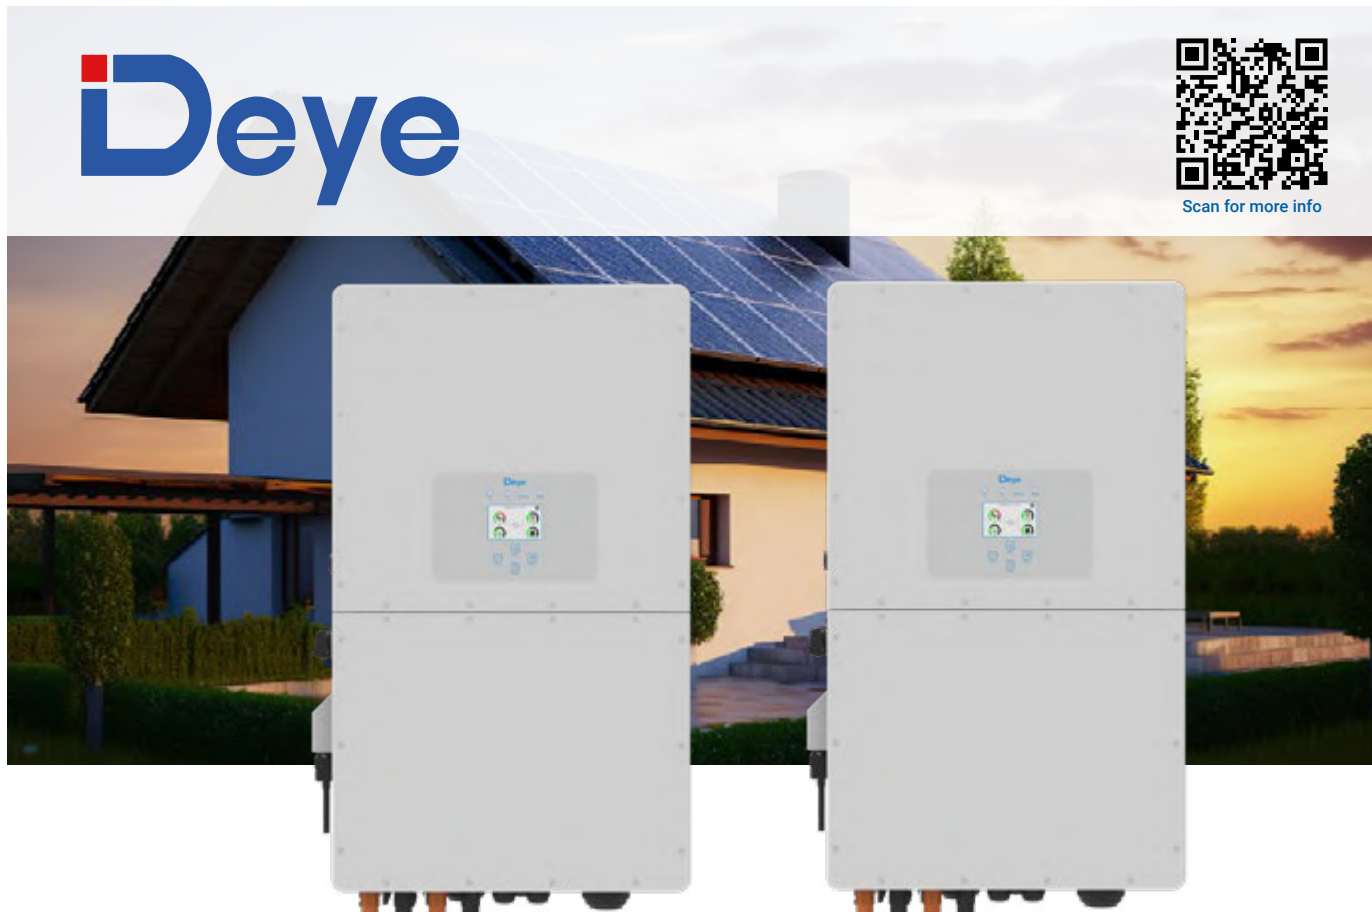

HYBRID INVERTERS
High Voltage - THREE PHASE



	40KW	50KW	60KW	80KW	100KW	125KW
Model	SUN-40K-SG01HP3-EU-BM4	SUN-50K-SG01-HP3-EU-BM4	SUN-60K-SG02HP3-EU-BM6	SUN-80K-SG02HP3-EU-EM6	SUN-100K-SG02HP3-EU-GM10	UN-125K-SG02HP3-EU-GM10
Battery Voltage Range (V)	160~800	160~800	160~1000	160~1000	160~1000	160~1000
Max. Charging Current (A)	50+50	50+50	80+80	80+80	100+100	100+100
Max. DC Input Power (W)	52000	65000	96000	160000	160000	200000
Start-up Voltage (V)	180	180	180	180	180	180
MPPT Range (V)	150-850	450-850	150-850	150-850	150-850	150-850
No.of MPP Trackers	4	4	4	6	10	10
Full Load DC Voltage (V)	360-850	450-850	650	650	650	650
PV Input Current (A)	36+36+36+36	36+36+36+36	36+36+36+36+36	36+36+36+36+36	42 x 10	42 x 10
No.of Strings per MPP Tracker	2+2+2+2	2+2+2+2	6/2+2+2+2+2	6/2+2+2+2+2	63 x 10	63 x 10
Rated AC Output Power (W)	40000	50000	66000	80000	110000	135000
AC Output Rated Current (A)	60.7/58	75.8/72.5	91/87	121.3/115.9	151.6/145	189.4/181.2
Max. AC Output Current (A)	66.7/63.8	83.4/79.7	100/95.7	121.3/115.9	166.7/159.5	204.6/195.7
Grid Type	Three Phase	Three Phase	Three Phase	Three Phase	Three Phase	Three Phase
Max. Efficiency	97.6%	97.6%	97.6%	97.6%	97.6%	97.6%
MPPT Efficiency	99.90%	99.90%	>99%	>99%	>99%	>99%

SKU	9761	9444	9762	9450	9765	9766
	NEW		NEW		NEW	NEW



Scan for more info



Scan for more info

HYBRID INVERTERS
 Low Voltage - THREE PHASE



	6KW SUN-6K- SG04LP3-EU	6KW SUN-6K- SG05LP3-EU-SM2	8KW SUN-8K- SG04LP3-EU	10KW SUN-10K- SG04LP3-EU
Model				
Battery Voltage Range (V)	40-60	40-60	40-60	40-60
Max. Charging Current (A)	150	135	190	210
Max. DC Input Power (W)	7800	9000	10400	13000
Start-up Voltage (V)	160	160	160	160
MPPT Range (V)	200-650	200-650	200-650	200-650
No.of MPP Trackers	2	2	2	2
Full Load DC Voltage (V)	350-650	350-650	350-650	350-650
PV Input Current (A)	20+20	20+20	26+20	26+26
No.of Strings per MPP Tracker	1+1	1+1	1+1	2+1
Rated AC Output Power (W)	6000	6000	8000	10000
AC Output Rated Current (A)	9.1/8.7	9.1/8.7	12.1/11.6	15.2/14.5
Max. AC Output Current (A)	10/9.6	10/9.6	13.4/12.8	16.7/15.9
Grid Type	Three Phase	Three Phase	Three Phase	Three Phase
Max. Efficiency	97.6%	97.6%	97.6%	97.6%
MPPT Efficiency	99.90%	99.90%	99.90%	99.90%

SKU	9445	9745	9436	9435
		NEW		

HYBRID INVERTERS
 Low Voltage - THREE PHASE



	10KW SUN-10KW- SG05LP3-EU-SM2	12KW SUN-12K- SG05LP3-EU-SM2	15KW SUN-15K-SG05 LP3-EU-SM2	20KW SUN-20K-SG05 LP3-EU-SM2
Model				
Battery Voltage Range (V)	40-60	40-60	40-60	40-60
Max. Charging Current (A)	210	210	280	350
Max. DC Input Power (W)	18000	18000	22400	32000
Start-up Voltage (V)	160	160	160	160
MPPT Range (V)	200-650	200-650	160-650	160-650
No.of MPP Trackers	2	2	2	2
Full Load DC Voltage (V)	350-650	350-650	550	550
PV Input Current (A)	26+26	26+26	36+36	36+36
No.of Strings per MPP Tracker	2/2+2	2/2+2	2/2+2	2/2+2
Rated AC Output Power (W)	11000	11000	18000	20000
AC Output Rated Current (A)	15.2/14.5	15.2/14.5	27.3/26.1	30.4/29
Max. AC Output Current (A)	16.7/15.9	16.7/15.9	30/28.7	33.4/31.9
Grid Type	Three Phase	Three Phase	Three Phase	Three Phase
Max. Efficiency	97.6%	97.6%	97.6%	97.6%
MPPT Efficiency	99.90%	99.90%	>99%	>99%

SKU	9754	9759	9756	9757
	NEW	NEW	NEW	NEW



HYBRID INVERTERS
Low Voltage - SINGLE PHASE




	3.6KW	5KW	5KW	6KW	8KW	10KW	12KW	16KW
Model	SUN-3.6K-SG05LP1-EU	SUN-5K-SG03LP1-EU	SUN-5K-SG05LP1-EU-AM2-P	SUN-6K-SG05LP1-EU-AM2-P	SUN-8K-SG01LP1-EU	SUN-10K-SG02LP1-EU-AM3	SUN-12K-SG02LP1-EU-AM3	SUN-16K-SG01LP1-EU
Battery Voltage Range (V)	40-60	40-60	40-60	40-60	40-60	40-60	40-60	40-60
Max. Charging Current (A)	90	120	120	135	190	220	250	290
Max. DC Input Power (W)	5760	6500	8000	9600	10400	16000	19200	25600
Start-up Voltage (V)	125	125	125	125	125	125	125	125
MPPT Range (V)	150-425	150-425	150-425	150-425	125-425	150-425	150-425	150-425
No.of MPP Trackers	2/1+1	2	2/1+1	2/1+1	2	3	3	3
Full Load DC Voltage (V)	370	300-425	370	370	200-425	500	500	370
PV Input Current (A)	18+18	13+13	18+18	18+18	26+26	20+20	20+20	26+26+26
No.of Strings -MPP Tracker	2/1+1	1	2/1+1	2/1+1	2+2	3/2+2+2	3/2+2+2	2
Rated AC Output Power (W)	3600	5000	5000	6000	8000	10000	12000	16000
AC Output Rated Current (A)	16.4/15.7	22.7/21.7	22.7/21.7	27.3/26.1	36.4/34.8	45.5/43.5	54.6/52.2	72.7/69.6
Max. AC Output Current (A)	18/17.2	25/23.9	25/23.9	30/28.7	40/38.3	50/47.9	60/57.4	80/76.5
Grid Type	Single Phase	Single Phase	Single Phase	Single Phase	Single Phase	Single Phase	Single Phase	Single Phase
Max. Efficiency	97.6%	97.6%	97.6%	97.6%	97.6%	97.6%	97.6%	97.6%
MPPT Efficiency	99.90%	99.90%	99.90%	99.90%	99.90%	99.90%	99.90%	99.90%

SKU	9746	9437	9760	9758	9447	9751	9752	9753
	NEW		NEW	NEW				



ON GRID INVERTERS 400V
SINGLE PHASE / THREE PHASE



	Single Phase 8KW	8KW	10KW	30KW	50KW	100KW
Model	XG8KTL	XG8KTR	XG10KTR	XG30KTR	XG50KTR	XG100KTR
Max. Input Power	12kW	12.8kW	16kW	48kW	80kW	150kW
Max. Input Voltage	600V	1100V	1100V	1100V	1100V	1100V
Start Voltage	80V	160V	160V	250V	250V	250V
Rated Input Voltage	360V	600V	600V	600V	600V	620V
Full-load MPP Voltage Range	250V-480V	320V-850V	450V-850V	500V-800V	520V-850V	530V-850V
MPPT Voltage Range	80V-560V	180V-1000V	180V-1000V	200V-1000V	200V-1000V	180V-1000V
Number of MPP Trackers	2	2	2	3	4	9
Max. Current per MPPT	1/1	14A/14A	14A/14A	26A	39A/26A/39A/26A	26A
Max. Output Current	40A	12.8A	15.9A	48.3A	79.7A	158.8A
Rated Output Powe	8kW	8kW	10kW	30kW	50kW	100kW
Max. Output Power	8.8kVA	8.8kVA	11kVA	33.3kVA	55kVA	110kVA
Rated Grid Voltage	220-240Vac	230Vac/400Vac	230Vac/400Vac	230Vac/400Vac	230Vac/400Vac	230Vac/400Vac
THDi	<3%	<3%	<3%	<3%	<3%	<3%
Max. Efficiency	98.70%	98.70%	98.70%	98.6%	98.7%	98.6%
MPPT Efficiency	99.90%	99.90%	99.90%	99.90%	99.90%	99.90%

SKU	9486	9481	9482	9483	9484	9485
	NEW					

Deye



INVERTER 50kW

NEW

String Inverter - Three Phase

Model	SUN-50K-G03
Max. DC Input Power (kW)	65
Max. DC Input Voltage (V)	1000
Start-up DC Input Voltage (V)	250
MPPT Operating Range (V)	200~850
Number of MPPT / Strings per MPPT	4/3
Rated Output Power (kW)	50
AC Grid Voltage Range (V)	277Vac~460Vac
Operating Phase	Three Phase
Rated AC Grid Output Current (A)	72.4
Max. AC Output Current (A)	79.7
Max. Efficiency	98.7%

SKU9781

DYN

ESS



- Overall Solar+Storage Solution
- All in one design Concept
- Convenient Outdoor Setup
- Allow Flexible System Design
- High - level Safety design
- Capacity Extensible to MegaWatts

All-In-One Cabinet

NEW

BESS 100kW Inverter/215kWh Battery

DH200F

BATTERY PARAMETER

Cell Capacity	280Ah
Battery Voltage Range	672~864V
Nominal Current	140A
System	215kWh
AC ON-GRID /OFF-GRID	
Nominal Power	100kW
AC Voltage	400V
Wiring	3P4L+PE
AC MAX Current	158A
PHOTOVOLTAIC INPUT	
MPPT Voltage Range	200-670V
MPPT Channels	Up to three
Input Power	Single channel 50kW

SKU9489

SUNGROW



Sungrow 250kw 800V Inverter

NEW

Three Phase

Model	SG250HX
Max. PV input voltage	1500V
Min. PV input voltage	600V
MPP voltage range	600V-1500V
No. of independent MPP inputs	12
Max. DC short-circuit current	50A *12
AC output power	250 kVA
Max. AC output current	180.5A
Nominal AC voltage	3 / PE, 800 V
AC voltage range	680 – 880V
Feed-in phases / connection phases	3/3
Max. efficiency	99.0%

SKU9496

SYL

A RISEN GROUP COMPANY



Plug-and-PlayNo external PCSNo BCP neededLiquid-cooledUp to 5 cabinetsFlexible layout

All-In-One Cabinet

NEW

BESS 100kW Inverter / 215kWh Battery

SU215E100LM

BATTERY Information

Battery	LFP
Capacity	280Ah
Configuration	240S1P
Nominal Voltage	768V
Voltage Range	672~864V
PCS Information	
Nominal Power	100kVA
Operating Mode	On-Grid & Off-Grid
Nominal Grid	400Vac
Power Factor	-1 to 1
Isolation	No Isolation
Connection Method	3P4L

SKU9490



ON GRID INVERTERS
THREE PHASE

	10KW	30KW	40KW	120KW
Model	BluE-10KT	KSG-30KT	KSG-40KT	KSG-120CL
Max. DC Voltage	1100V	1100V	1100V	1100V
Nominal Voltage	620V	600V	600V	620V
Start Voltage	180V	180V	180V	250V
MPPT Voltage Range	140V-1000V	200V-1000V	200V-1000V	200V-1000V
Number of MPPT Tracker	2	3	3	10
Strings Per MPPT Tracker	1	2	2	2
Max. Input Current Per MPPT	15A	30A	30A	30A
Max. Short-circuit Current Per MPPT	20A	50A	50A	50A
Nominal AC Output Power	10000W	30000W	40000W	120kW
Maximum AC Output Power	11000VA	33000VA	44000VA	121kVA
Nominal AC Voltage	400V 3L+N	400V 3L+N	400V 3L+N	320-480V 3W+PE
Maximum Output Current	16A	47.7A	63.6A	174.6A
THDi	<3%	<3%	<3%	<3%
Max. Efficiency	98.7%	98.7%	98.7%	98.7%
Euro Efficiency	98.1%	98.4%	98.4%	98.3%
SKU	9491	9492	9493	9494



SKU 9495
WIFI DONGLE FOR KSTAR INVERTERS



All-in-One Energy Storage System
5kW Inverter & 5.32kWh Battery - SINGLE PHASE

Model	RW-F5.3-1H3
Output Active Power (W)	5000
AC Output Rated Current (A)	22.8 / 21.8
Max. PV Access Power (W)	10000
Start Up PV Voltage (Vdc)	125
MPPT Voltage Range (Vdc)	150-425
Battery Nominal Voltage (V)	51.2
Battery Energy Configuration (kWh)	5.32
Battery Operating Voltage (V)	44.8-57.6

SKU 9430



C&I Battery Cabinet
Without Inverter

Model	GE-F60
Module Energy (kWh)	5.12
Module Nominal Voltage (V)	51.2
Module Capacity (Ah)	100
System Nominal Voltage (V)	614.4
System Operating Voltage (V)	480-700
System Energy (kWh)	61.44
Charge/Discharge Current (A)	100
Dimension	735x1045x2235mm

SKU 9791



C&I Battery Cabinet
With 50KW Hybrid Inverter - THREE PHASE

Model	GE-F120-2H2
Nominal Output Power (W)	40000
Max PV Input Power (W)	52000
Start Up DC Voltage (Vdc)	180
MPPT Voltage Range (Vdc)	150-850
Battery Operating Voltage (V)	500-700
Battery Nominal Voltage (V)	51.2
Battery Module Energy (kWh)	5.12
Energy Configuration (kWh)	122.8

SKU 9792

1. STANDARD 19 INCH RACK

For 8Pcs Batteries and 1 Pcs Controller

SKU 9475L

NEW

For 12 Pcs Batteries and 1 Pcs Controller

SKU 9475



Deye



2. BATTERY CLUSTER CONTROL BOX

High Voltage - BOS-G PRO

Model	BOS-G-PDU-2
Operating Voltage	120-1000 VDC
Charge/Discharge Current	100A
MAX Charge/Discharge Current	125A
DC Input Rating	12±2%V/4.15A
Dimension	440*570*150mm

SKU 9478

3. BATTERY MODULE 5.12KWH

High Voltage LiFePO4 - Rack Mounting - BOS-G PRO

Model	BOS-G-Pack5.1
Nominal Capacity	100 Ah
Nominal Energy	5.12kWh
Nominal Voltage	51.2VDC
Charge/Discharge Current	100A

SKU 9479

1. STANDARD 19 INCH RACK

For 15 Pcs Batteries and 1 Pcs Controller

SKU 9793

NEW



Deye



C&I ESS Solution/Rack-Mounted Battery (HV)

High Voltage - BOS-B

Model	BOS-B-PDU -2-A
Operating Voltage	200-1000 Vdc
Charge/Discharge Current	168A
Operating Temperature	-20~60°
Size	788.6×526×167.2mm

SKU 9794

2. BATTERY MODULE 16.08KWH

High Voltage LiFePO4 - Rack Mounting - BOS-B

Model	BOS-B-Pack16-A3
Nominal Capacity	314 Ah
Nominal Energy	16.08kWh
Nominal Voltage	51.2VDC
Charge/Discharge Current	180A
Size	795.9x526x274.2

SKU 9795

1. STANDARD 19 INCH RACK

For 13 Pcs Batteries and 1 Pcs Controller

SKU 9775

Dimensions: 589x590x2240mm



Deye



2. BATTERY CLUSTER CONTROL BOX

High Voltage - BOS-A

Model	BOS-A-PDU-2
Operating Voltage	436.8-569.4 VDC
Charge/Discharge Current	100A
MAX Charge/Discharge Current	160A
Module Capacity (Ah)	200Ah
Dimension	601.5x520x135mm

SKU 9776

3. BATTERY MODULE 5.12KWH

High Voltage LiFePO4 - Rack Mounting - BOS-A

Model	BOS-A
Nominal Capacity	200 Ah
Nominal Energy	7.68kWh
Nominal Voltage	38.4VDC
Charge/Discharge Current	100A



SKU 9777



BATTERIES

NEW

PRODUCT GUARANTEE
UP TO
10 YEARS



Deye

Deye LV Lithium Battery 16kWh 51.2V

Deye LV Lithium Battery 11.8kWh 51.2V

Deye LV Lithium Battery 5.12kWh 51.2V

Deye Low Voltage Lithium Battery 16W 51.2V

Model	SE-F16-C	SE-F12-C	SE-F5-PRO-C	RW-F16
Nominal Energy	5kW	11.8kWh	5.12kW	16kWh
SKU	9786	9787	9788	9789

PRODUCT GUARANTEE
UP TO
10 YEARS



NEW

ESS SOLUTION BATTERIES

Low Voltage LiFePO4 - HEATED version

Model	SE-F16 Max-H
Rated Capacity	314 Ah
Nominal Voltage	51.2VDC
Operating Voltage	44.8-57.6VDC
Charge/Current	157A Max. Continuous
Discharge Current	230A Max. Continuous
Max 32 units in parallel	

SKU

9785

PRODUCT GUARANTEE
UP TO
10 YEARS



BATTERIES

Low Voltage LiFePO4 - Stackable

Model	SE-G5.1-PRO-B
Nominal Capacity	100 Ah
Nominal Energy	5.12kWh
Nominal Voltage	51.2VDC
Charge/Discharge Current	100A

SKU

9474

OPTONICA
SOLAR

PRODUCT GUARANTEE
UP TO
10 YEARS



IP20

BATTERIES RACK MOUNTING

Low Voltage LiFePO4

Model	VE48100E
Nominal Capacity	100 Ah
Nominal Energy	5.12kWh
Nominal Voltage	51.2VDC
Charge/Discharge Current	100A
Warranty	10 Years

SKU

9470

OPTONICA
SOLAR

PRODUCT GUARANTEE
UP TO
10 YEARS



IP20

BATTERIES RACK MOUNTING

Low Voltage LiFePO4

NEW

Model	VT48200B
Nominal Capacity	200 Ah
Nominal Energy	9.6kWh
Nominal Voltage	48VDC
Charge/Discharge Current	100A
Warranty	10 Years

SKU

9770

SKU 9465

SET FOR BATTERY 9471-9473



SKU 9469

SLAVE CABLE KIT FOR SKU:9470



SKU 9468

EXTERNAL RACK FOR SKU:9470



SKU 9468C

EXTERNAL COVER FOR SKU:9470



SKU 9769

SLAVE CABLE KIT for 9770



SKU 9768

L-SHAPE Mounted Rack for 9770



SKU 9767

Black Stacked Rack for 9770



Deye



BALCONY ENERGY STORAGE

ALL-IN-ONE module - One Battery

Model	AE-FS2.0-2H2
Nominal Capacity	100 Ah
Nominal Energy	5.12kWh
Nominal Voltage	51.2VDC
Charge/Discharge Current	100A

SKU 9487

Deye Balcony Battery

Expansion Pack for Balcony Storage

Model	AE-F2.0
Nominal Energy	2kWh
Nominal Voltage	51.2Vdc
Charge/Discharge Current	50a

SKU 9487-B

1

Deye Lithium Battery 5.1kWh 51.2V

LifePO4 - Stackable

Model	AI-W5.1-B
Capacity	100Ah
Nominal Voltage	51.2Vdc
Operating Voltage	44.8V - 57.6V
Nominal Energy	5.12kWh
Dimensions	720x255x569mm

SKU 9733



2

Deye PDU & base for AI-W5.1-B

Built-in Circuit Breaker - 250A 2P, 1000Vdc

Model	PDU1-B
Dimensions	720x255x238mm

SKU 9734



SKU 9466

CT for Smart Meter 3-Phase



3 Years
Warranty



3 Years
Warranty



Smart Meters Kits for INVT 3-Phase Inverters

Including wires and CT SDO24TS

Model	STD670V
Voltage	3x5A, 3x16A, 3x32A, 3x63A & 3x100A
Current	2x110V/220V, 3x57.7/100V, 3x127/220V, 3x220V/380V, 3x230V/400V, 3x100V, 3x380V

SKU 9460

Multi-Function Electrical Energy Meter

SINGLE PHASE

Nominal Voltage	120V or 230V AC
Basic current	10A
Maximum rated current	100A
Bi-directional measurement	Yes
Operating Voltage	80%-120%

SKU 9461

Multi-Function Electrical Energy Meter

THREE PHASE

Nominal Voltage	3x230/400V ac
Basic current	10A
Maximum rated current	100A
Bi-directional measurement	Yes
Operating Voltage	80%-120%

SKU 9462

9463
CT & PT Operated

3 Years
Warranty



3 Years
Warranty

TOMZN



Dual Power Automatic Transfer Electrical Selector

TOMZN Din Rail 3 phase ATS 4P 63A 100A 125A 230V

Thomson TOQ7 rail type three-phase automatic switch (ATS), using four pole (4P) design, with 63A, 100A, 125A rated current specifications, suitable for 230V voltage environment. It is an uninterruptible electrical selector switch with dual power automatic conversion, which can quickly switch between the main and standby power supplies to ensure stable power supply, and is widely used in various scenarios with high requirements for power supply continuity.

SKU 9799



Wireless energy management system

A smart load management and home automation solution based on LoRa communication.

Deye Wireless CT is installed in the distribution box to monitor power consumption, Supports both LoRa and RS485 communication methods simultaneously.



SKU

9798

SUN-SMART-CT01

Deye Smart Switch is designed for outdoor high-power loads, offering the same logic control as Smart Plugs, supporting both single-phase and three-phase loads. With the Deye Cloud APP or directly on the inverter's screen, you can customize the on/off logic for each Smart Plug based on factors like time and battery SOC levels.



SKU

9732

SUN-SMART-SWITCH01P3





All Deye hybrid inverters can serve as the local control center for the Deye Smart Home IoT System. Simply install the Deye Smart Transmitter(TX) to the inverter's Meter port to easily pair with Deye LoRa devices.



SKU

9796

SUN-SMART-TX01

Deye Smart Plug can be easily installed in any standard socket, instantly upgrading the appliance plugged in to a smart device.



SKU

9731

SUN-SMART-PLUG01P1-F (16A)

Deye Smart EV Charger can be directly connected to any AC port of the inverter and is controlled by the inverter via LoRa communication. It offers flexible options to take advantage of low-cost electricity, with modes such as Plug and Play, Time of Charge, or Solar Energy Only.



SKU

9797,9790

SMART EV CHARGER

DEYE SMART EV CHARGING GUN

Supports three modes: Plug and Play , Time of Charge and Solar Energy Only

Input Voltage	230(single phase), 230/400(three phase)
Connection Mode	L+N+PE,3L+N+PE
Input Current (A)	32
Max Output Power (kW)	7(single phase)/ 22(three phase)

SKU

9797

SUN-EVSE22K01-EU-AC

Input Voltage	230/400
Connection Mode	3L+N+PE
Input Current (A)	16
Max Output Power (kW)	11

SKU

9790

SUN-EVSE11K01-EU-AC



PV MODULE OPTIMIZER	
SUNGO-OPT	
Maximum input power(W)	600
Maximum input voltage(V)	60
MPPT voltage range (V)	7-60
Maximum input current (A)	16
SKU	9464



PV MODULE OPTIMIZER	
Tigo-OPT	
Maximum input power(W)	700
Maximum input voltage(V)	80
MPPT voltage range (V)	16-80
Maximum input current (A)	15
SKU	9499



TIGO Tap TIGO Access	
Black	
The Tigo Access Point (TAP) improves the data management of your solar array by wirelessly communicating with Tigo smart modules and retrofit devices. TAP also greatly improves safety with module-level deactivation.	
Input Voltage	5-25V DC
Power Consumption	1W Peak
Dimmensions	126.2x130x26.8mm
Recommended cable type:	RS485 , 18-22AWG
SKU	9499-A



CCA Cloud Connect Kit with Tap		
DIN RAIL Power Supply		
	CCA	TAP
Input Voltage	10-24V DC	100-240V
Power Consumption	3-10W	3-15W
Dimmensions	31x115.5x71.5	203x115x278.4
Cooling	Nanural Convection	Nanural Convection
SKU	9499-C	

NEW

Easy installation
Non-expendable
Natural field trials
Max. current 200kA
No maintenance



ESE Lightning Rods

with Early Steamer Emission

Material	Stainless steel
Body Color	Silver

SKU 9898

NEW

Easy installation
Non-expendable
Natural field trials
Max. current 200kA
No maintenance



ESE Lightning Rods

with Early Steamer Emission

Material	Stainless steel
Body Color	Silver

SKU 9899

Deye



PV MODULE OPTIMIZER

SUN-XL02-B

Maximum input power(W)	700
Maximum input voltage(V)	80
MPPT voltage range (V)	12-80
Maximum input current (A)	15

SKU 9498

! CAN NOT WORK WITHOUT CONCENTRATOR SKU:9497 !

Deye



OPTIMIZER CONCENTRATOR

SUN-XL20-B

Maximum Input Current (A)	20
System (V)	1000/1500
Connected Strings	4
Connector	MC4

SKU 9497

! CAN NOT WORK WITHOUT OPTIMIZER SKU:9498 !



SKU 9656 AC220V or 110V

SKU 9657 AC220V or 110V + DC24 Supply(Battery)

DOUBLE HEADED PV CLEANING BRUSH

5.5m Glass Fiber Handle 220VAC or 110VAC

Utilization Voltage	24V
Power	52.8W*2
Speed	128rpm
Torsion	1.2 N.m
Brush Size	280mm

Accessories:

Adapter , Water pipe and accessories , Backpack , Telescopic rod,
Brush head assembly set (including 1 pcs brush discs)



SOLAR PANEL CLEANING ROBOT

Single or Double PV Panel





PV Module Range	Up to 2384mm Single / Double
Traveling Speed	15-20m/min
Generator Power	150W/200W
Water Used Per Hour	330
Solar Panel Power	27W
Battery Capacity (Ah)	24V10Ah / 20Ah
Cleaning Mode	Dry/Watering Cleaning
Other Functions	Speed Adjust/Direction Adjust



SKU 9658 Single PV Panel 150W 24V10Ah

SKU 9659 Double PV Panel 200W 24V20Ah



SKU 9601 Rail 27*45mm - 2.2m 	SKU 9602 Rail 27*45mm - 1.2m 	SKU 9618 300mm Mini Rail 	SKU 9619 2400mm Long Rail 	SKU 9610 Rail Joiner 200mm 	SKU 9624 Middle Clamp M8x35 for 30mm 	SKU 9622 Middle Clamp 20mm Wide 	SKU 9606 TT Nut M8x25mm 	SKU 9625 Inner Bolt 40mm 	SKU 9626 Inner Bolt 25mm 
SKU 9620 Rail+Rubber+Screws 70x80x18.5mm 	SKU 9613 Adjustable Rear Leg 10-15° 	SKU 9614 Adjustable Rear Leg 15-30° 	SKU 9612 Adjustable Front Leg 	SKU 9616 Adjustable Tilt Mount Bracket 	SKU 9627 M8 Hexagonal Nut 	SKU 9628 M8 Square Nut 	SKU 9631 Sel Tapping Screw ST5.5*25mm 	SKU 9607 Screw ST6.3*80mm 	SKU 9608 Wood Screw M6.3*80mm 
SKU 9632 Triangle Bracket 3850x1500x547mm 	SKU 9635 Hook with 4pcs self Drilling Screws 	SKU 9609 L-Foot M8*25mm 	SKU 9611 Hanger Bolt with L-Foot 	SKU 9633 Rail Clamp 40mm 	SKU 9636 Adjustable Tile Hook 	SKU 9637 Rail Joiner L120mm 	SKU 9638 Ball Nut L22mm 	SKU 9639 End Clamp L60mm for 30mm Solar Panel 	SKU 9640 Front Support L60mm 10° 
SKU 9605 Rooftop Hook 	SKU 9617 Ballasted Strip 446x80x18.5mm 	SKU 9634 Ballast Pan for SKU:9632 	SKU 9615 Grounding Plate 	SKU 9629 Expansion Bolt 60mm 	SKU 9641 Rear Support L60mm 10° 	SKU 9642 Base Beam 60x25mm -1.5m 	SKU 9643 Beam Joiner L150mm 	SKU 9644 T-Bolt M8*20mm 	SKU 9645 Earthing Clip 
SKU 9603 End Clamp M8x25mm for 35mm 	SKU 9621 End Clamp M8x25mm for 30mm 	SKU 9623 End Clamp for 30mm 	SKU 9630 Ball Nut 20mm 	SKU 9604 Middle Clamp 35mm 	SKU 9646 Rubber Pad L100x70.5x12mm 	SKU 9647 Ballasted Rail 50x30x2.5mm - 2m 	SKU 9648 Solar Cable Clip - 2x4.0mm, SS304 		

Pitched Tile Roof Mounting

OPTONICA Pitched Tile Roof Mounting is suitable for installing framed or frameless modules flushed to pitch roof. Special design and pre-assembled clamp make installation easy.

Light Weight, Convenient and Durable.
Install Site: Pitch Tile Roof
Max Building Height: Up to 20m(65ft).
Max Wind Speed: 60 m/s
Snow Load: 1.4 KN/m2



Step 1: Remove tile and fix tile hook on beam by M6.3 x 80mm wood screw.



Step 2: Fix solar rail on tile hook and lock tightly by M8x25mm T module set.



Step 3: Put solar panel on rail and fix with inter clamp or end clamp until finished.

SKU 9610



Rail Joiner 200mm

SKU 9605



Rooftop Hook

SKU 9606



TT Nut M8x25mm

SKU 9608



Wood Screw M6.3x80mm

SKU 9602



1.2m

SKU 9601



2.2m

SKU 9624



For panel 30mm

SKU 9604



For panel 35mm

SKU 9621




For panel 30mm

SKU 9603



For panel 35mm

You may need rail joiner if rail is not long enough.

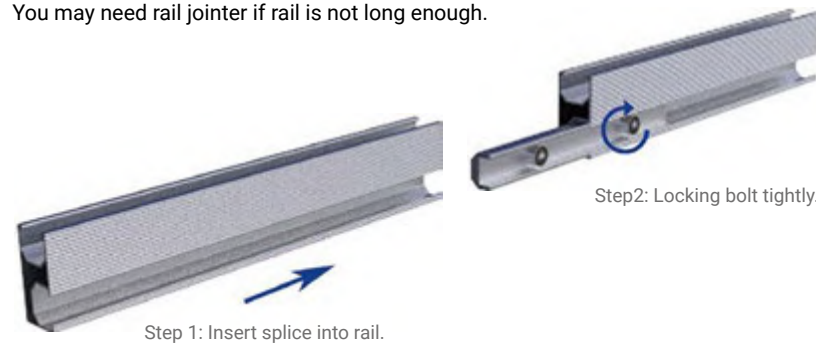

Pitched Tin Roof Mounting

OPTONICA Pitched Tin Roof Mounting is made by high quality extruded Aluminum, the weight is light and it's convenient. It's easy to install and can work for any solar modules.

Install Site: Pitch Tin Roof
Max Building Height: Up to 20m(65ft).
Max Wind Speed: 60 m/s
Snow Load: 1.4 KN/m2
Material: Aluminum 6005-TS
Warranty: 10 years warranty; 25 years service life.
Installation Guide



A
SKU 9609



Rail Joiner

B
SKU 9602



Rail 27x45mm 1.2m

C
SKU 9624



For panel 30mm

D
SKU 9621



For panel 30mm

SKU 9610



Rail Joiner

SKU 9601



Rail 27x45mm 2.2m

SKU 9604




For panel 35mm

SKU 9603




For panel 35mm

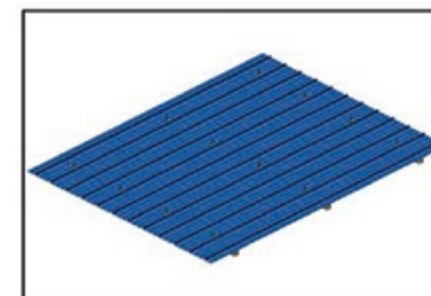

Step 1: Install L foot on tin roofing.



Step 2: Fix solar rail on L foot and lock by T modules set.

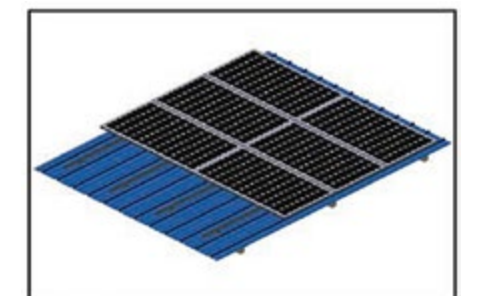


Step 3: Put solar panel on rail and fix with solar clamp.

Adjustable Tin Roof Mounting

OPTONICA Adjustable Tin Roof Mounting is designed to meet the adjustable tilt angle requirement, tilt angle adjustable make solar mounting system get the best efficiency on each season.

Adjustable Angle: 10-15 degree, 15-30degree, 30-60degree.
Install Site: Tin Roof
Max Building Height: Up to 20m(65ft).
Max Wind Speed: 60 m/s
Snow Load: 1.4 KN/m2

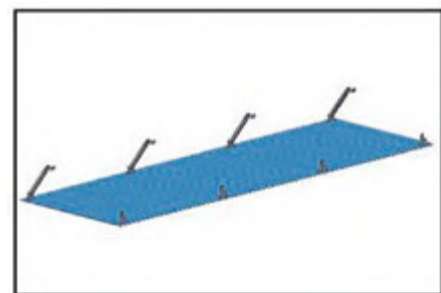


Step 1: Fix adjustable front leg and rear leg on steel roofing.



Step 2: Fix solar rail on adjustable front leg and rear leg



Step 3: Put solar panel on rail and fix with solar clamp until finished.

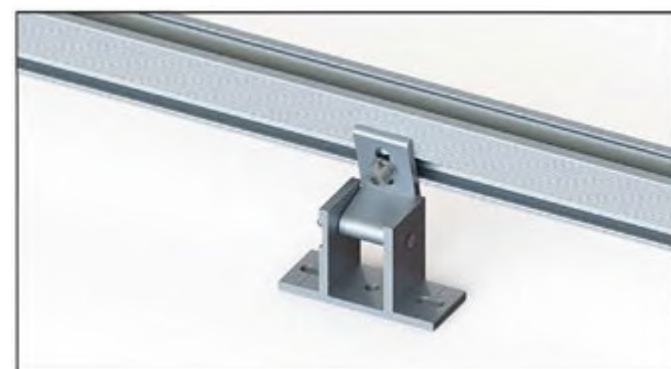

Trapezoidal Metal Roof Mounting Railless Solution


Installation site: trapezoid metal roof or sandwich roof

Application: Framed solar panel for any size

Structural materials: Aluminum Survival wind speed: up to 60m/s

Design snow pressure: up to 1.4KN / m2 Inclination: 0 degree (the same angle as roof)

Panel direction: vertical or landscape Quality assurance for 10 years

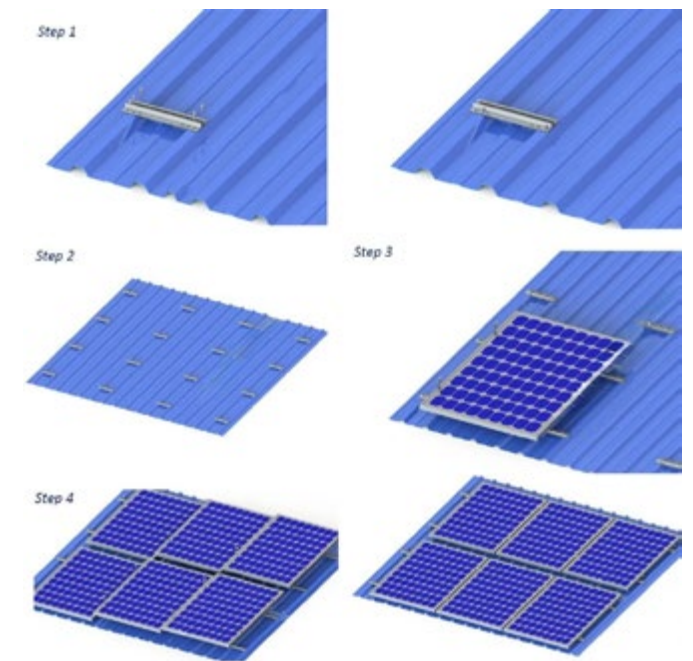


Step 1: Install railless clamp hook on roofing as per technical drawing.

Step 2: Install railless clamp hook one by one.

Step 3: Fix solar panel on railless clamp hook by mid clamp or end clamp.

Step 4: Fix solar panel one by one until finished.

A: Railless clamp hook
B: Mid clamp
C: End clamp

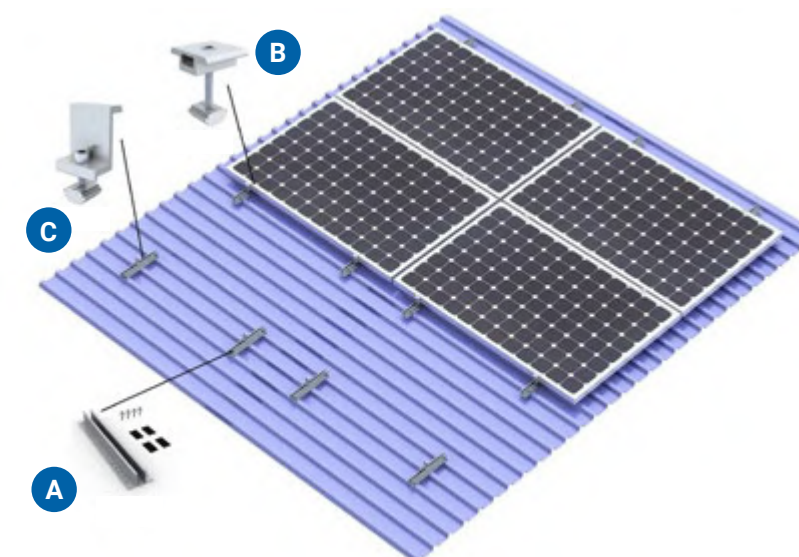

Aluminum Ballasted Solar Panels Racking System For Flat Roof



OPTONICA Ballasted Mounting System is a common alternative used on solar installations for flat roof, it's non penetrate, so you don't need worry your roof will have any penetrations. The different with others roof mount is secured way, ballast mounts are secured with weight by concrete block to secure an array to the roof and prevent wind lift or other movement, but others are secured to the roof beams of the building through penetrations in the roof.

Light Weight, Convenient and Durable.
High Durability Ensure the Structure Strength
Install Site: Flat Concrete Roof or Open Filed
Adjustable Angle: 10°
Max Wind Speed: 60 m/s
Snow Load: 1.4 KN/m²

Step 1: Fix the rail on a flat roof
Step 2: Attach the front and rear support and tighten the screws
Step 3: Put the solar panel and fix with the clamps




A: Front Support L60mm, 10°
B: Rear Support L60mm, 10°
C: Base Beam 60*25mm, Length 1.5m
D: Rubber Pad L100x70.5x12mm

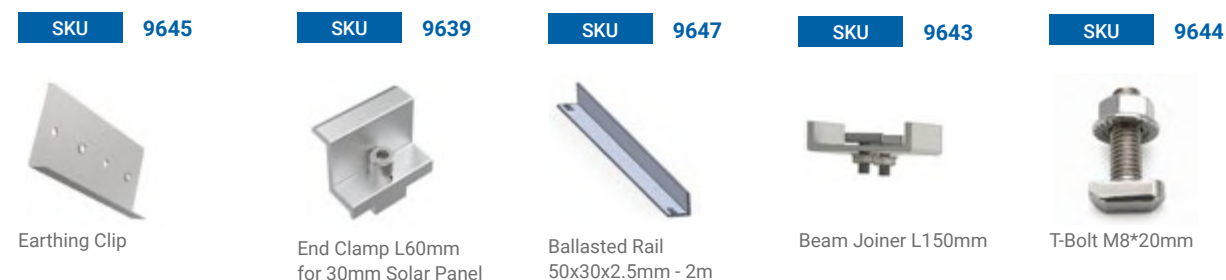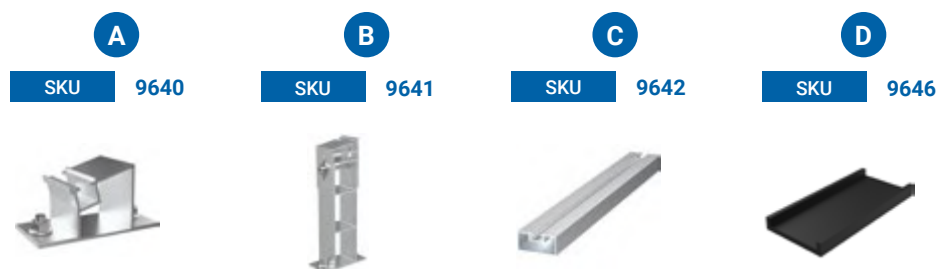

South Aluminum ballasted solar panels racking system for flat roof



South Aluminum ballasted solar panels racking system for flat roof

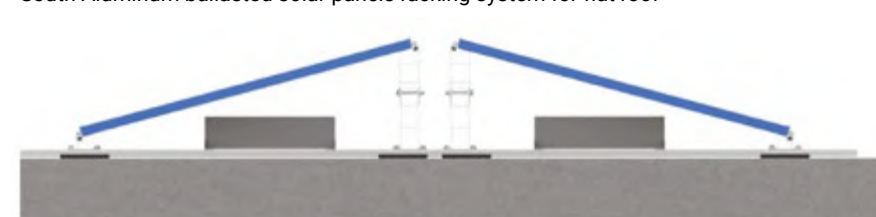


East west dual tilt flat roof mounting system

OPTONICA East West mounting system is a exclusive design,- the vast majority of systems are "south/north-facing", which means they are oriented south/north. Compare with traditional system, east-west don't require significant "dead space" when install, so it can install more solar panel in the same area, and higher energy production output.


Light Weight, Convenient and Durable.
Install Site: Flat Concrete Roof or Open Filed
Adjustable Angle: 5°-20°
Max Wind Speed: 60 m/s
Snow Load: 1.4 KN/m²




Step 1: Fix pre-assembled tripod bracket on flat roof.
Step 2: Fix solar rail on tripod bracket and lock by rail clamp.
Step 3: Put solar panel on rail and fix with solar clamp until finished.

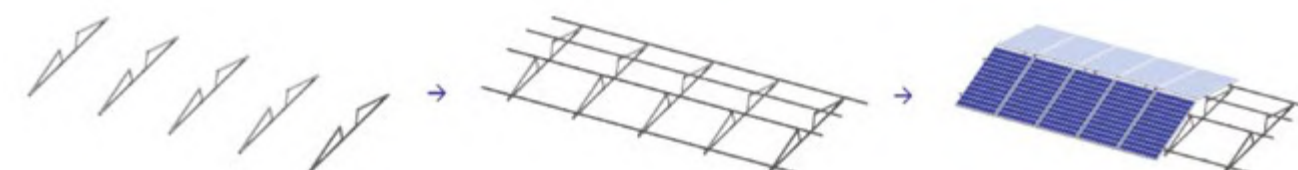

A: Pre-assembled tripod bracket
B: Alu roof rail profile
C: Rail jointer
D: Middle clamp
E: End clamp
F: Rail clamp
G: Ballast Pan

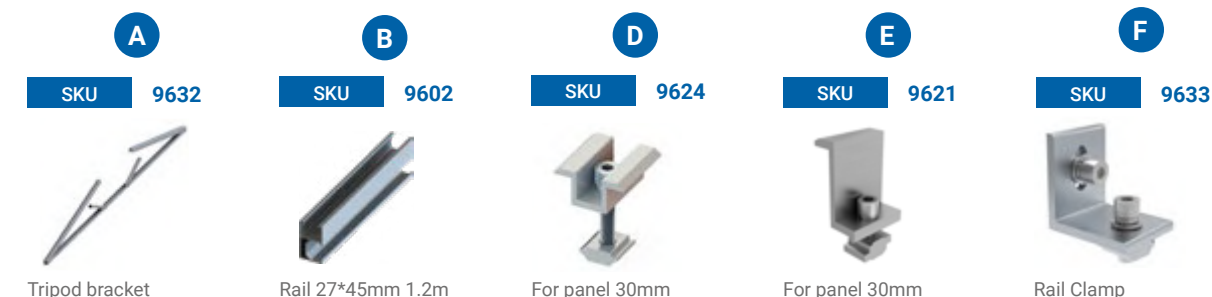

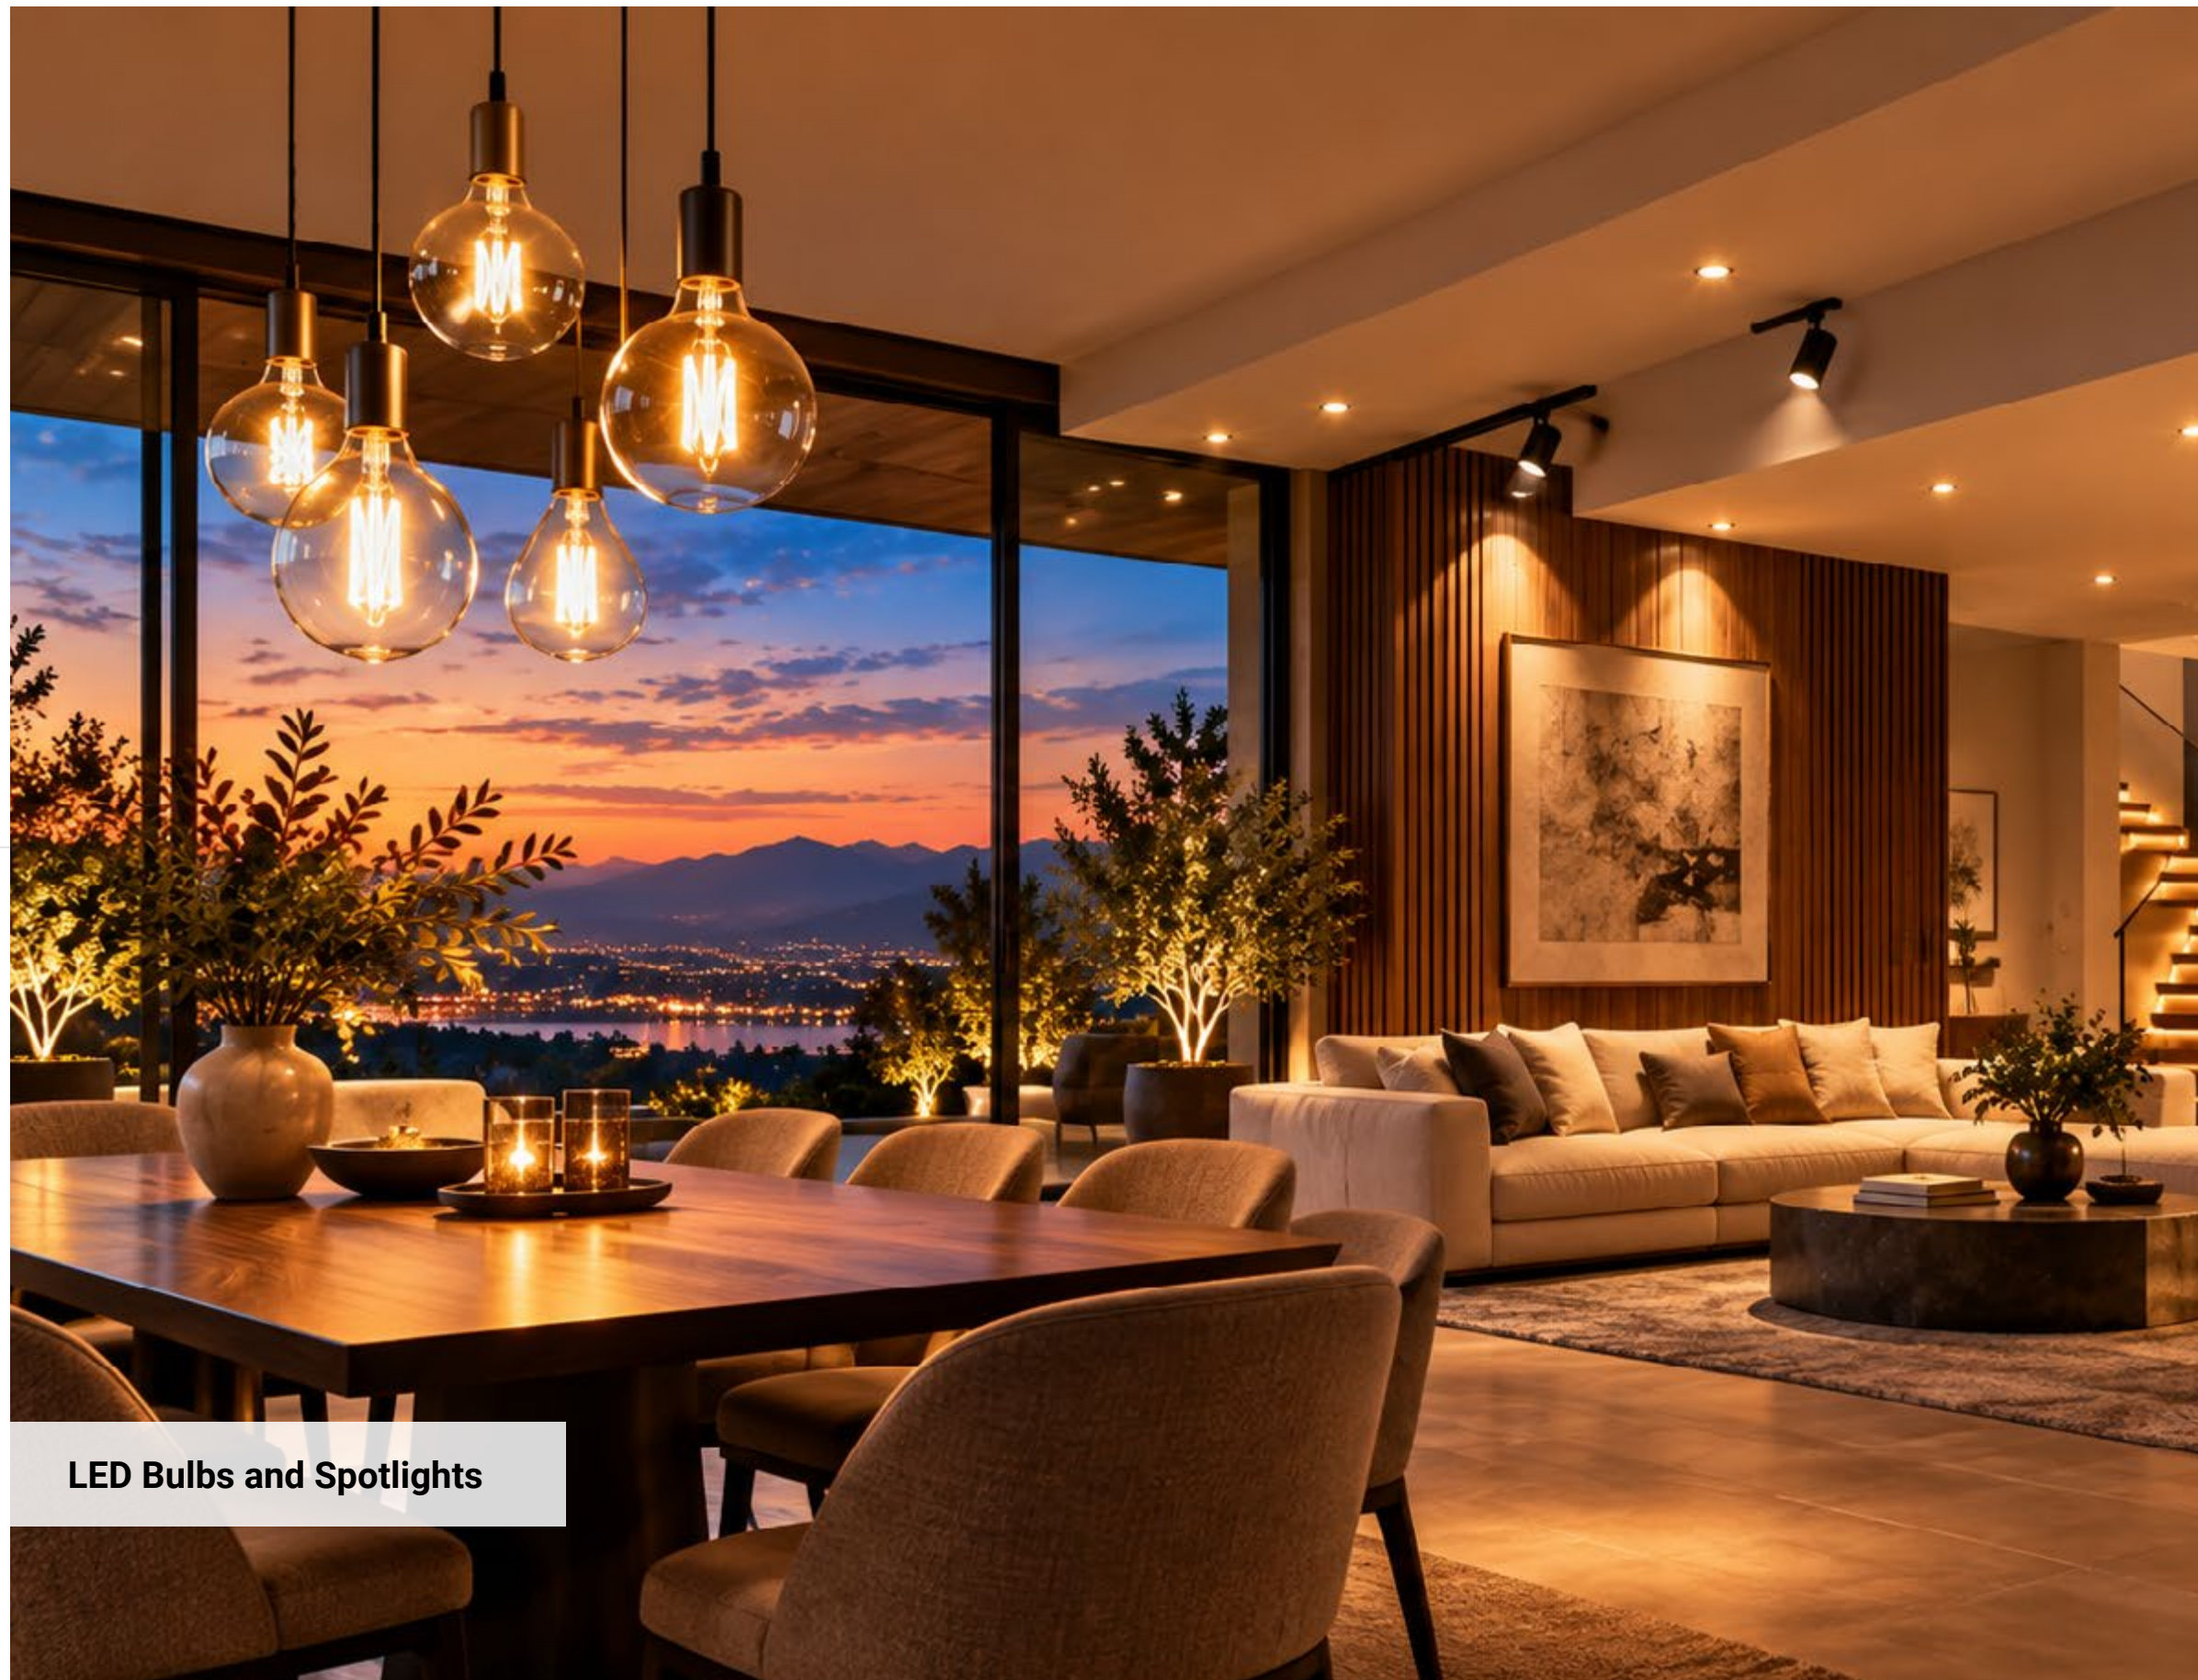

LED Bulbs and Spotlights

Our advanced LED bulbs bring together cutting-edge efficiency, durability, and style. Designed to replace traditional lighting without compromise, they provide a warm and welcoming glow while helping reduce energy costs and environmental impact. Perfect for modern living, they combine everyday practicality with a timeless aesthetic that complements any space — from cosy homes to elegant restaurants and lively bars.

Features:

- Up to 90% lower energy consumption compared to incandescent bulbs
- Extra-long lifespan for fewer replacements and reduced maintenance
- Consistent, flicker-free light that's gentle on the eyes
- Wide range of colour temperatures from warm to cool white
- Universal E27 socket compatibility
- Available in classic bulb shapes and contemporary designs

Applications:

- General lighting for living rooms, kitchens, and bedrooms
- Stylish accent lighting in cafés, shops, and restaurants
- Decorative use in chandeliers, pendants, or wall fixtures
- Reliable performance in enclosed or covered outdoor fittings



LED SPOTLIGHT G4			
2W SMD			
Watts	2W	CRI	Ra>80
Input Voltage	AC / DC 12V	IP Rating	IP20
Flux	180lm	Dimension	ø12x29mm
Beam Angle	300°	Material	Platic
Socket	G4	Dimmable	No
SKU	1601	1602	1603
Color	6000K	4500K	2800K



LED SPOTLIGHT G4			
2W SMD			
Watts	2W	CRI	Ra>80
Input Voltage	AC / DC 12V	IP Rating	IP20
Flux	170lm	Dimension	ø10x30mm
Beam Angle	360°	Material	Platic
Socket	G4	Dimmable	No
SKU	1615	1616	1617
Color	6000K	4500K	2700K



LED SPOTLIGHT G4/MR11			
3W SMD			
Watts	3W	CRI	Ra>80
Input Voltage	AC DC 12V	IP Rating	IP20
Flux	210lm	Dimension	ø35x45mm
Beam Angle	38°	Material	Platic
Socket	G4	Dimmable	No
SKU	1066	1067	1068
Color	6000K	4500K	2700K



LED SPOTLIGHT G9			
3.5W SMD			
Watts	3.5W	CRI	Ra>80
Input Voltage	AC220-240V 50Hz	IP Rating	IP20
Flux	400lm	Dimension	ø16x50mm
Beam Angle	360°	Material	Ceramic
Socket	G9	Dimmable	No
SKU	1651	1652	1653
Color	6000K	4500K	2700K



LED SPOTLIGHT G9					
Plastic					
Socket	G9	CRI	Ra>80		
Input Voltage	AC170-265V 50Hz	IP Rating	IP20		
Beam Angle	360°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1638	3W	220lm	73lm/W	6000K	ø16x48mm
1639	3W	220lm	73lm/W	4500K	ø16x48mm
1640	3W	220lm	73lm/W	2700K	ø16x48mm
1635	5W	420lm	84lm/W	6000K	456x120x83mm
1636	5W	420lm	84lm/W	4000K	456x120x83mm
1637	5W	400lm	84lm/W	2700K	456x120x83mm

LED SPOTLIGHT G9					
Dimmable					
Socket	G9	CRI	Ra>80		
Input Voltage	AC220-240V 50Hz	IP Rating	IP20		
Beam Angle	360°	Dimmable	YES		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1654	4W	400lm	100lm/W	6000K	ø16x50mm
1655	4W	400lm	100lm/W	4500K	ø16x50mm
1656	4W	400lm	100lm/W	2700K	ø16x50mm
1644	6W	550lm	92lm/W	6000K	ø18x64mm
1645	6W	550lm	92lm/W	4000K	ø18x64mm
1646	6W	550lm	92lm/W	2700K	ø18x64mm

LED SPOTLIGHT G9					
Plastic					
Socket	G9	CRI	Ra>80		
Input Voltage	220-240V 50/60Hz	IP Rating	IP20		
Beam Angle	360°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1647	7W	820lm	117lm/W	2800K	ø19x68mm
1648	7W	950lm	135lm/W	2800K	ø19x68mm





LED Spotlight



LED SPOTLIGHT MR16					
PREMIUM LINE					
SMD					
Socket	GU5.3/MR16		CRI	Ra>80	
Input Voltage	AC / DC12V		IP Rating	IP20	
Beam Angle	110°		Dimmable	No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1761	5W	400lm	80lm/W	6000K	ø50x54mm
1762	5W	400lm	80lm/W	4500K	ø50x54mm
1763	5W	400lm	80lm/W	2800K	ø50x54mm
1764	7W	600lm	86lm/W	6000K	ø50x54mm
1765	7W	600lm	86lm/W	4500K	ø50x54mm
1766	7W	600lm	86lm/W	2800K	ø50x54mm



LED SPOTLIGHT MR16					
SMD					
Socket	GU5.3/MR16		CRI	Ra>80	
Input Voltage	AC / DC12V		IP Rating	IP20	
Beam Angle	110°		Dimmable	No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1191	5W	400lm	73lm/W	6000K	ø50x47mm
1192	5W	400lm	73lm/W	4500K	ø50x47mm
1193	5W	400lm	73lm/W	2700K	ø50x47mm
1194	7W	600lm	84lm/W	6000K	ø50x47mm
1195	7W	600lm	84lm/W	4000K	ø50x47mm
1196	7W	600lm	84lm/W	2700K	ø50x47mm



LED SPOTLIGHT MR16					
COB					
Socket	GU5.3/MR16		CRI	Ra>80	
Input Voltage	AC / DC12V		IP Rating	IP20	
Beam Angle	50°		Dimmable	No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1164	4W	320lm	80lm/W	6000K	ø50x50mm
1168	6W	400lm	67lm/W	6000K	ø50x55mm
1169	6W	400lm	67lm/W	4000K	ø50x55mm
1170	6W	400lm	67lm/W	2700K	ø50x55mm



LED SPOTLIGHT GU10					
PREMIUM LINE					
SMD					
Socket	Gu10		CRI	Ra>80	
Input Voltage	AC175-265V 50Hz		IP Rating	IP20	
Beam Angle	110°		Dimmable	No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1767	5W	400lm	80lm/W	6000K	ø50x57mm
1768	5W	400lm	80lm/W	4500K	ø50x57mm
1769	5W	400lm	80lm/W	2700K	ø50x57mm
1772	7W	600lm	86lm/W	6000K	ø50x57mm
1770	7W	600lm	86lm/W	4500K	ø50x57mm
1773	7W	600lm	86lm/W	2700K	ø50x57mm



LED SPOTLIGHT GU10					
6W Glass - Vintage - Premium Dimming					
Socket	GU10		CRI	Ra>80	
Input Voltage	220-240V 50/60Hz		IP Rating	IP20	
Beam Angle	360°		Dimmable	YES	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1925	6W	700lm	117lm/W	6000K	ø50x55mm
1926	6W	700lm	117lm/W	4500K	ø50x55mm
1927	6W	700lm	117lm/W	2800K	ø50x55mm



LED SPOTLIGHT GU11					
2W SMD					
Socket	GU10		CRI	Ra>80	
Input Voltage	220-240V 50/60Hz		IP Rating	IP20	
Beam Angle	110°		Dimmable	No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1981	2W	120lm	60lm/W	6000K	ø35x46mm
1982	2W	120lm	60lm/W	4500K	ø35x46mm
1983	2W	120lm	60lm/W	2700K	ø35x46mm

NEW



LED SPOTLIGHT GU10					
COB Chip - Aluminium					
Socket	GU10		CRI	Ra>80	
Input Voltage	220-240V 50/60Hz		IP Rating	IP20	
Beam Angle	50°		Dimmable	No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1997	6W	480lm	80lm/W	6000K	ø50x55mm
1998	6W	4800lm	80lm/W	4500K	ø50x55mm
1999	6W	480lm	80lm/W	2700K	ø50x55mm





LED SPOTLIGHT GU10	
SMD 110°	
Input Voltage	AC175-265V 50Hz
Beam Angle	110°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
1901	4.5W	320lm	71lm/W	6000K	ø50x57mm
1902	4.5W	320lm	71lm/W	4500K	ø50x57mm
1903	4.5W	320lm	71lm/W	2700K	ø50x57mm
1904	6.5W	550lm	71lm/W	6000K	ø50x57mm
1905	6.5W	550lm	71lm/W	4500K	ø50x57mm
1906	6.5W	550lm	71lm/W	2700K	ø50x57mm
1907	9.5W	880lm	93lm/W	6000K	ø50x57mm
1908	9.5W	880lm	93lm/W	4500K	ø50x57mm
1909	9.5W	880lm	93lm/W	2700K	ø50x57mm
Dimmable	1945	7W	500lm	72lm/W	6000K ø50x57mm
	1946	7W	500lm	72lm/W	4500K ø50x57mm
	1947	7W	500lm	72lm/W	2700K ø50x57mm



LED SPOTLIGHT GU10	
SMD 38°	
Input Voltage	AC175-265V 50Hz
Beam Angle	38°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
1935	5W	400lm	80lm/W	6000K	ø50x57mm
1936	5W	400lm	80lm/W	4500K	ø50x57mm
1937	5W	400lm	80lm/W	2700K	ø50x57mm
1938	7W	560lm	80lm/W	6000K	ø50x57mm
1939	7W	560lm	80lm/W	4500K	ø50x57mm
1940	7W	560lm	80lm/W	2700K	ø50x57mm
Dimmable	1944	7W	500lm	72lm/W	4500K ø50x57mm



LED SPOTLIGHT GU10	
COB - WHITE	
Input Voltage	AC220-240V 50Hz
Beam Angle	50°
CRI	Ra>80
IP Rating	IP20
Dimmable	No



LED SPOTLIGHT GU10	
COB - Silver	
Input Voltage	AC220-265V 50Hz
Beam Angle	50°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
1957	4W	320lm	80lm/W	6000K	ø50x55mm
1958	4W	320lm	80lm/W	4500K	ø50x55mm
1959	4W	320lm	80lm/W	2700K	ø50x55mm
1960	6W	480lm	80lm/W	6000K	ø50x55mm
1961	6W	480lm	80lm/W	4500K	ø50x55mm
1962	6W	480lm	80lm/W	2700K	ø50x55mm
Dimmable	1963	6W	500lm	83lm/W	6000K ø50x55mm
	1964	6W	500lm	83lm/W	4500K ø50x55mm

SKU	Watt	Lumen	Lumen/W	Color	Dimension
1263	4W	320lm	80lm/W	6000K	ø50x60mm
1265	4W	320lm	80lm/W	2700K	ø50x60mm
Dimmable	1266	4W	320lm	80lm/W	6000K ø50x60mm
	1267	4W	320lm	80lm/W	4500K ø50x60mm
	1269	6W	480lm	80m/W	6000K ø50x60mm
	1270	6W	480lm	80lm/W	4500K ø50x60mm
Dimmable	1271	6W	480lm	80lm/W	2700K ø50x60mm
	1272	6W	480lm	80lm/W	6000K ø50x60mm
	1273	6W	480lm	80lm/W	4500K ø50x60mm



LED SPOTLIGHT GU10					
AR111					
Socket	GU10		CRI	Ra>80	
Input Voltage	AC170-265V 50Hz		IP Rating	IP20	
Beam Angle	30°		Dimmable	No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1533	15W	1200lm	80lm/W	4500K	ø111x70mm
1534	15W	1200lm	80lm/W	2700K	ø111x70mm
1535	15W	1100lm	84lm/W	4500K	ø111x70mm
1536	15W	1100lm	84lm/W	2700K	ø111x70mm

Dimmable

NEW



LED SPOTLIGHT AR111					
G53 - Plastic					
Socket	G53		CRI	Ra>80	
Input Voltage	AC175-265V 50Hz		IP Rating	IP20	
Beam Angle	120°		Dimmable	No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1544	9W	720lm	80lm/W	4500K	ø111x58mm
1545	9W	720lm	80lm/W	2700K	ø111x58mm



LED SPOTLIGHT GU10					
AR111 - Plastic					
Socket	GU10		CRI	Ra>80	
Input Voltage	AC170-265V 50Hz		IP Rating	IP20	
Beam Angle	120°		Dimmable	No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1531	9W	820lm	91lm/W	4500K	ø111x70mm
1532	9W	820lm	91lm/W	2700K	ø111x70mm

NEW



LED SPOTLIGHT AR111					
G53 - Aluminum					
Socket	G53		CRI	Ra>80	
Input Voltage	AC175-265V 50Hz		IP Rating	IP20	
Beam Angle	120°		Dimmable	No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1540	15W	1200lm	80lm/W	4500K	ø111x58mm



LED SPOTLIGHT GX53					
7W Recessed					
Socket	GX53		CRI	Ra>80	
Input Voltage	220-240V 50/60Hz		IP Rating	IP20	
Beam Angle	180°		Dimmable	No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1541	7W	560lm	80lm/W	6000K	ø74x25mm
1542	7W	560lm	80lm/W	4500K	ø74x25mm
1543	7W	560lm	80lm/W	2700K	ø74x25mm

NEW



LED SPOTLIGHT AR111					
G53 - Plastic					
Socket	G53		CRI	Ra>80	
Input Voltage	AC175-265V 50Hz		IP Rating	IP20	
Beam Angle	120°		Dimmable	No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1537	15W	1200lm	80lm/W	6000K	ø111x58mm
1538	15W	1200lm	80lm/W	4500K	ø111x58mm
1539	15W	1200lm	80lm/W	2700K	ø111x58mm



EPISTAR
CHIPS

LED SPOTLIGHT AR111					
G53					
Socket	G53	CRI	Ra>80		
Input Voltage	DC 12V	IP Rating	IP20		
Beam Angle	30°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1527	12W	960lm	80lm/W	4500K	ø111x58mm
1517	15W	1080lm	70lm/W	4500K	ø111x58mm
1516	15W	1080lm	70lm/W	2700K	ø111x58mm



EPISTAR
CHIPS

LED SPOTLIGHT AR111					
G53					
Socket	G53	CRI	Ra>80		
Input Voltage	DC 12V	IP Rating	IP20		
Beam Angle	120°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1519	15W	1050lm	70lm/W	4500K	ø111x58mm
1518	15W	1050lm	70lm/W	2700K	ø111x58mm



LED SPOTLIGHT PAR30					
E27 - Black					
Socket	E27	CRI	Ra>80		
Input Voltage	AC220-240V 50Hz	IP Rating	IP20		
Beam Angle	30°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1528	25W	2400lm	96lm/W	6000K	ø95x130mm
1529	25W	2400lm	96lm/W	4500K	ø95x130mm
1530	25W	2400lm	96lm/W	2700K	ø95x130mm

NEW



SKU	19091
Size	180x160x315mm



LED PENDANT LAMP			
E27 - CCT - Pendant included - 110cm			
Power	12W	Material	Alu+Silicon
Input Voltage	AC220-240V 50Hz	Beam Angle	270°
Lumen	600lm	IP Rating	IP20



NEW



SKU	19092
Size	310x250x185mm



LED PENDANT LAMP			
E27 - CCT - Pendant included - 110cm			
Power	12W	Material	Alu+Silicon
Input Voltage	AC220-240V 50Hz	Beam Angle	270°
Lumen	800lm	IP Rating	IP20



NEW



SKU	19093
Size	210x210x245mm



LED PENDANT LAMP			
E27 - CCT - Pendant included - 110cm			
Power	12W	Material	Alu+Silicon
Input Voltage	AC220-240V 50Hz	Beam Angle	270°
Lumen	800lm	IP Rating	IP20





LED BULB A60

PREMIUM LINE

E27

Input Voltage	AC175-265V 50Hz
Beam Angle	270°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
1718	10W	950lm	95lm/W	6000K	ø60x109 mm
1719	10W	950lm	95lm/W	4500K	ø60x109 mm
1720	10W	950lm	95lm/W	2700K	ø60x109 mm
1721	12W	1155lm	96lm/W	6000K	ø60x112 mm
1722	12W	1155lm	96lm/W	4500K	ø60x112 mm
1723	12W	1155lm	96lm/W	2700K	ø60x112 mm
1724	15W	1320lm	88lm/W	6000K	ø60x120 mm
1725	15W	1320lm	88lm/W	4500K	ø60x120 mm
1726	15W	1320lm	88lm/W	2700K	ø60x120 mm
A70	1748	18W	1880lm	104lm/W	ø70x120 mm
	1749	18W	1880lm	104lm/W	ø70x120 mm
	1750	18W	1880lm	104lm/W	ø70x120 mm



LED BULB A60

E27 - Dimmable

Input Voltage	AC220-240V 50Hz
Beam Angle	270°
CRI	Ra>80
IP Rating	IP20
Dimmable	Yes

SKU	Watt	Lumen	Lumen/W	Color	Dimension
1701	9W	806lm	90lm/W	6000K	ø60x108 mm
1702	9W	806lm	90lm/W	4500K	ø60x108 mm
1703	9W	806lm	90lm/W	2700K	ø60x108 mm
1849	10W	1055lm	101lm/W	6000K	ø60x110mm
1704	11W	1055lm	96lm/W	6000K	ø60x118 mm
1705	11W	1055lm	96lm/W	4500K	ø60x118 mm
1706	11W	1055lm	96lm/W	2700K	ø60x118 mm



LED BULB A60

E27

Input Voltage	AC220-240V 50Hz
Beam Angle	270°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
1351	8.5W	806lm	95lm/W	6000K	ø60x108 mm
1352	8.5W	806lm	95lm/W	4500K	ø60x108 mm
1353	8.5W	806lm	95lm/W	2700K	ø60x108 mm
1354	10.5W	1055lm	101lm/W	6000K	ø60x108 mm
1355	10.5W	1055lm	101lm/W	4500K	ø60x108 mm
1356	10.5W	1055lm	101lm/W	2700K	ø60x108 mm
1357	14W	1380lm	99lm/W	6000K	ø60x118 mm
1358	14W	1380lm	99lm/W	4500K	ø60x118 mm
1359	14W	1320lm	99lm/W	2700K	ø60x118 mm
A65	1360	17W	1710lm	101lm/W	ø65x125 mm
	1361	17W	1710lm	101lm/W	ø65x125 mm
	1362	17W	1710lm	101lm/W	ø65x125 mm
	1363	19W	1950lm	103m/W	ø65x135 mm
	1364	19W	1950lm	103lm/W	ø65x135 mm
	1365	19W	1950lm	103lm/W	ø65x135 mm



LED BULB G45

E27

Input Voltage	AC175-265V 50Hz
Beam Angle	180°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
1344	3.5W	300lm	86lm/W	6000K	ø45x75mm
1345	3.5W	300lm	86lm/W	4500K	ø45x75mm
1346	3.5W	300lm	86lm/W	2700K	ø45x75mm
1327	5.5W	450lm	82lm/W	6000K	ø45x75mm
1328	5.5W	450lm	82lm/W	4500K	ø45x75mm
1329	5.5W	450lm	82lm/W	2700K	ø45x75mm
1336	8W	710lm	89lm/W	6000K	ø45x80mm
1337	8W	710lm	89lm/W	4500K	ø45x80mm
1338	8W	710lm	89lm/W	2700K	ø45x80mm



LED BULB A60					
E27 - 3 pcs Pack					
Socket	E27	CRI	Ra>80		
Input Voltage	AC220-240V 50Hz	IP Rating	IP20		
Beam Angle	270°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1341	8.5W	806lm	95lm/W	6000K	ø60x108mm
1342	8.5W	806lm	95lm/W	4500K	ø60x108mm
1343	8.5W	806lm	95lm/W	2700K	ø60x108mm



LED BULB A60					
E27 - Motion Sensor					
Socket	E27	CRI	Ra>80		
Input Voltage	AC220-240V 50Hz	IP Rating	IP20		
Beam Angle	270°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1710	7W	560lm	95lm/W	6000K	ø60x123mm
1711	7W	560lm	95lm/W	4500K	ø60x123mm



LED BULB A63					
E27					
Socket	E27	CRI	Ra>80		
Input Voltage	AC220-240V 50Hz	IP Rating	IP20		
Beam Angle	270°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1876	6W	480lm	80lm/W	6000K	ø63x100 mm
1877	6W	480lm	80lm/W	4500K	ø63x100 mm
1878	6W	480lm	80lm/W	2700K	ø63x100 mm



LED BULB G46					
E27					
Socket	E27	CRI	Ra>80		
Input Voltage	AC220-240V 50Hz	IP Rating	IP20		
Beam Angle	90°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
11301	10W	1000lm	100lm/W	6000K	ø46x86 mm
11302	10W	1000lm	100lm/W	4500K	ø46x86 mm
11303	10W	1000lm	100lm/W	2700K	ø46x86 mm



LED BULBS CCT					
E27					
Socket	E27	CRI	Ra>80		
Input Voltage	AC220-240V 50Hz	IP Rating	IP20		
Beam Angle	270°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
11304	10W	1000lm	100lm/W	CCT	ø60x150 mm



LED BULBS 2835 SMD					
E27					
Socket	E27	CRI	Ra>80		
Input Voltage	AC110-240V 50Hz	IP Rating	IP20		
Beam Angle	270°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
11311	12W	1550lm	130lm/W	2700K	ø28x115 mm



LED BULBS G95 / G120	
E27	
Input Voltage	AC175-265V 50Hz
Beam Angle	270°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

	SKU	Watt	Lumen	Lumen/W	Color	Dimension
	1841	12W	1155lm	96lm/W	6000K	ø95x138mm
	1842	12W	1155lm	96lm/W	4500K	ø95x138mm
	1843	12W	1155lm	96lm/W	2700K	ø95x138mm
G120	1845	15W	1500lm	100lm/W	6000K	ø120x155mm
	1846	15W	1500lm	100lm/W	4500K	ø120x155mm
	1847	15W	1500lm	100lm/W	2700K	ø120x155mm
	1884	18W	1820lm	101lm/W	6000K	ø120x172mm
	1885	18W	1820lm	101lm/W	4500K	ø120x172mm
	1886	18W	1820lm	101lm/W	2700K	ø120x172mm



LED BULBS T80-T120	
E27	
Input Voltage	AC220-240V 50Hz
Beam Angle	150°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

	SKU	Watt	Lumen	Lumen/W	Color	Dimension
T80	11891	25W	2700lm	108lm/W	6000K	ø80x138mm
	11892	25W	2700lm	108lm/W	4000K	ø80x138mm
T100	11893	30W	3200lm	106lm/W	6000K	ø100x165mm
	11894	30W	3200lm	106lm/W	4000K	ø100x165mm
T120	11895	40W	4000lm	100lm/W	6000K	ø120x191mm
	11896	40W	4000lm	100lm/W	4000K	ø120x191mm
T140	11897	50W	5000lm	100lm/W	6000K	ø140x220mm
	11898	50W	5000lm	100lm/W	4000K	ø150x220mm



LED CANDLE C37	
E14	
Input Voltage	AC175-265V 50Hz
Beam Angle	180°
CRI	Ra>80
IP Rating	IP20
Dimmable	No



LED BULB G45	
E14	
Input Voltage	AC175-265V 50Hz
Beam Angle	240°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
1422	3.7W	320lm	86lm/W	6000K	ø37x100mm
1423	3.7W	320lm	86lm/W	4500K	ø37x100mm
1424	3.7W	320lm	86lm/W	2700K	ø37x100mm
1425	5.5W	450lm	82lm/W	6000K	ø37x100mm
1426	5.5W	450lm	82lm/W	4500K	ø37x100mm
1427	5.5W	450lm	82lm/W	2700K	ø37x100mm
1428	8W	710lm	89lm/W	6000K	ø37x112mm
1429	8W	710lm	89lm/W	4500K	ø37x112mm
1430	8W	710lm	89lm/W	2700K	ø37x112mm

SKU	Watt	Lumen	Lumen/W	Color	Dimension
1407	3.5W	300lm	86lm/W	6000K	ø45x78mm
1408	3.5W	300lm	86lm/W	4500K	ø45x78mm
1409	3.5W	300lm	86lm/W	2700K	ø45x78mm
1401	5.5W	450lm	82lm/W	6000K	ø45x78mm
1402	5.5W	450lm	82lm/W	4500K	ø45x78mm
1403	5.5W	450lm	82lm/W	2700K	ø45x78mm
1404	8W	710lm	89lm/W	6000K	ø45x80mm
1405	8W	710lm	89lm/W	4500K	ø45x80mm
1406	8W	710lm	89lm/W	2700K	ø45x80mm



LED BULB C38					
E14					
Socket	E14	CRI		Ra>80	
Input Voltage	AC220-240V 50Hz	IP Rating		IP20	
Beam Angle	90°	Dimmable		No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
11401	10W	1000lm	100lm/W	6000K	ø38x116 mm
11402	10W	1000lm	100lm/W	4500K	ø38x116 mm
11403	10W	1000lm	100lm/W	2700K	ø38x116 mm



LED BULB G46					
E14					
Socket	E14	CRI		Ra>80	
Input Voltage	AC220-240V 50Hz	IP Rating		IP20	
Beam Angle	180°	Dimmable		No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
11404	10W	1000lm	100lm/W	6000K	ø46x86 mm
11405	10W	1000lm	100lm/W	4500K	ø46x86 mm
11406	10W	1000lm	100lm/W	2700K	ø46x86 mm



LED CANDLE C37					
E14 - Dimmable					
Socket	E14	CRI		Ra>80	
Input Voltage	AC175-265V 50Hz	IP Rating		IP20	
Beam Angle	180°	Dimmable		Yes	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1464	6W	480lm	80lm/W	6000K	ø37x100 mm
1465	6W	480lm	80lm/W	4500K	ø37x100 mm
1463	6W	480lm	80lm/W	2700K	ø37x100 mm



LED CANDLE C37 - TIP					
E14					
Socket	E14	CRI		Ra>80	
Input Voltage	AC175-265V 50Hz	IP Rating		IP20	
Beam Angle	180°	Dimmable		No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1435	5.5W	450lm	82lm/W	6000K	ø37x125 mm
1436	5.5W	450lm	82lm/W	4500K	ø37x125 mm
1437	5.5W	450lm	82lm/W	2700K	ø37x125 mm



LED BULB R39					
E14					
Socket	E14	CRI		Ra>80	
Input Voltage	AC175-265V 50Hz	IP Rating		IP20	
Beam Angle	200°	Dimmable		No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1487	4W	300lm	75lm/W	6000K	ø39x70 mm
1488	4W	300lm	75lm/W	4500K	ø39x70 mm
1489	4W	300lm	75lm/W	2700K	ø39x70 mm



LED BULB R50					
E14					
Socket	E14	CRI		Ra>80	
Input Voltage	AC175-265V 50Hz	IP Rating		IP20	
Beam Angle	180°	Dimmable		No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1438	6W	450lm	75lm/W	6000K	ø50x85 mm
1439	6W	450lm	75lm/W	4500K	ø50x85 mm
1440	6W	450lm	75lm/W	2700K	ø50x85 mm



LED Spotlight E14					
E14 SMD					
Socket	E14	CRI		Ra>80	
Input Voltage	AC220-240V 50Hz	IP Rating		IP20	
Beam Angle	360°	Dimmable		No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1499	7W	820lm	117lm/W	4500K	ø19x71 mm



LED BULB FILAMENT R50					
E14					
Socket	E14	CRI		Ra>80	
Input Voltage	AC175-265V 50Hz	IP Rating		IP20	
Beam Angle	150°	Dimmable		No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1872	5W	600lm	120lm/W	2700K	ø50x86 mm





LED FILAMENT DESIGNER BULBS					
E27 - Golden Glass					
Socket	E27	CRI	Ra>80		
Input Voltage	AC180-240V 50Hz	IP Rating	IP20		
Beam Angle	300°	Dimmable	No		
SKU	Watt	Lumen	Body	Color	Dimension
11701	2.5W	188lm	Black	1800K	ø148x175mm
11702	2.5W	188lm	Copper	1800K	ø148x175mm



LED FILAMENT DESIGNER BULBS					
E27 - Golden Glass					
Socket	E27	CRI	Ra>80		
Input Voltage	AC180-240V 50Hz	IP Rating	IP20		
Beam Angle	300°	Dimmable	No		
SKU	Watt	Lumen	Body	Color	Dimension
11703	2.5W	188lm	Black	1800K	ø148x240mm
11704	2.5W	188lm	Copper	1800K	ø148x240mm



LED FILAMENT DESIGNER BULBS					
E27 - Golden Glass					
Socket	E27	CRI	Ra>80		
Input Voltage	AC180-240V 50Hz	IP Rating	IP20		
Beam Angle	300°	Dimmable	No		
SKU	Watt	Lumen	Body	Color	Dimension
11705	2.5W	188lm	Black	1800K	ø200x180mm
11706	2.5W	188lm	Copper	1800K	ø200x180mm



LED FILAMENT DESIGNER BULBS					
E27 - Golden Glass					
Socket	E27	CRI	Ra>80		
Input Voltage	AC180-240V 50Hz	IP Rating	IP20		
Beam Angle	300°	Dimmable	No		
SKU	Watt	Lumen	Body	Color	Dimension
11707	2.5W	188lm	Black	1800K	ø125x150mm
11708	2.5W	188lm	Copper	1800K	ø125x150mm



LED FILAMENT DESIGNER BULBS					
E27 - Golden Glass					
Socket	E27	CRI	Ra>80		
Input Voltage	AC180-240V 50Hz	IP Rating	IP20		
Beam Angle	300°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
11709	3W	225lm	75lm/W	1800K	ø45x165 mm



LED FILAMENT DESIGNER BULBS					
E27 - Golden Glass					
Socket	E27	CRI	Ra>80		
Input Voltage	AC180-240V 50Hz	IP Rating	IP20		
Beam Angle	300°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
11710	3W	225lm	75lm/W	1800K	ø125x165 mm



LED FILAMENT DESIGNER BULBS					
E27 - Golden Glass					
Socket	E27	CRI	Ra>80		
Input Voltage	AC180-240V 50Hz	IP Rating	IP20		
Beam Angle	300°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
11711	3W	225lm	75lm/W	1800K	ø137x220mm



LED FILAMENT DESIGNER BULBS					
E27 - Golden Glass					
Socket	E27	CRI	Ra>80		
Input Voltage	AC180-240V 50Hz	IP Rating	IP20		
Beam Angle	300°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
11712	3W	225lm	75lm/W	1800K	ø132x252 mm



LED BULB FILAMENT G95					
E27 - Half Golden Glass					
Socket	E27	CRI	Ra>80		
Input Voltage	AC175-265V 50Hz	IP Rating	IP20		
Beam Angle	180°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1889	4W	400lm	100lm/W	2700K	ø95x140 mm
1890	7W	800lm	114lm/W	2700K	ø95x140 mm



LED BULB FILAMENT G95					
E27 - Half Silver Glass					
Socket	E27	CRI	Ra>80		
Input Voltage	AC175-265V 50Hz	IP Rating	IP20		
Beam Angle	180°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1887	4W	400lm	100lm/W	2700K	ø95x140 mm
1888	7W	800lm	114lm/W	2700K	ø95x140 mm



LED BULB FILAMENT A60					
E27 - Half Golden Glass					
Socket	E27	CRI	Ra>80		
Input Voltage	AC175-265V 50Hz	IP Rating	IP20		
Beam Angle	180°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1893	4W	400lm	100lm/W	2700K	ø60x105 mm
1896	7W	800lm	114lm/W	2700K	ø60x105 mm



LED BULB FILAMENT A60					
E27 - Half Silver Glass					
Socket	E27	CRI	Ra>80		
Input Voltage	AC175-265V 50Hz	IP Rating	IP20		
Beam Angle	180°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1879	4W	400lm	100lm/W	2700K	ø60x105 mm
1880	7W	800lm	140lm/W	2700K	ø60x105 mm



LED BULB FILAMENT PS160					
E27 - Golden Glass					
Socket	E27	CRI	Ra>80		
Input Voltage	AC175-265V 50Hz	IP Rating	IP20		
Beam Angle	270°	Dimmable	Yes		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1790	8W	810lm	101lm/W	2700K	ø95x140 mm



LED BULB FILAMENT BD200					
E27 - Golden Glass					
Socket	E27	CRI	Ra>80		
Input Voltage	AC175-265V 50Hz	IP Rating	IP20		
Beam Angle	270°	Dimmable	Yes		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1791	8W	810lm	101lm/W	2700K	ø95x140 mm



LED BULB FILAMENT G200					
E27 - Golden Glass					
Socket	E27	CRI	Ra>80		
Input Voltage	AC175-265V 50Hz	IP Rating	IP20		
Beam Angle	270°	Dimmable	Yes		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1792	8W	810lm	101lm/W	2700K	ø60x105 mm



LED BULB FILAMENT MS200					
E27 - Golden Glass					
Socket	E27	CRI	Ra>80		
Input Voltage	AC175-265V 50Hz	IP Rating	IP20		
Beam Angle	270°	Dimmable	Yes		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1793	8W	810lm	101lm/W	2700K	ø60x105 mm



LED FILAMENT BULB A60	
E27	
Input Voltage	AC175-265V 50Hz
Beam Angle	300°
CRI	Ra>80
IP Rating	IP20
Dimmable	No



SKU	Watt	Lumen	Lumen/W	Color	Dimension
1857	4W	400lm	100lm/W	6000K	ø60x106mm
1858	4W	400lm	100lm/W	4500K	ø60x106mm
1859	4W	400lm	100lm/W	2700K	ø60x106mm
1899	4W	470lm	117lm/W	2700K	ø60x106mm
1854	5W	600lm	120lm/W	6000K	ø37x100mm
1855	5W	600lm	120lm/W	4500K	ø60x106mm
1856	5W	600lm	120lm/W	2700K	ø60x106mm
1308	6W	630lm	105lm/W	4000K	ø60x105mm
1309	6W	630lm	105lm/W	2700K	ø60x105mm



1853	6W	630lm	105lm/W	2700K	ø60x105mm
1310	8W	810lm	101lm/W	6000K	ø60x110mm
1311	8W	810lm	101lm/W	4500K	ø60x110mm
1312	8W	810lm	101lm/W	2700K	ø60x110mm



1323	8W	810lm	101lm/W	2700K	ø60x110mm
------	----	-------	---------	-------	-----------



LED FILAMENT BULB A65	
E27	
Input Voltage	AC220-240V 50Hz
Beam Angle	300°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

A60

SKU	Watt	Lumen	Lumen/W	Color	Dimension
1313	10W	1350lm	135lm/W	6000K	ø60x110mm
1314	10W	1350lm	135lm/W	4500K	ø60x110mm
1315	10W	1350lm	135lm/W	2700K	ø60x110mm
1316	12W	1500lm	125lm/W	2700K	ø65x126mm
1317	12W	1500lm	125lm/W	6000K	ø65x126mm
1318	12W	1500lm	125lm/W	4500K	ø65x126mm
1319	14W	2000lm	143lm/W	2700K	ø65x126mm
1320	14W	2000lm	143lm/W	4000K	ø65x126mm
1321	14W	2000lm	143lm/W	2700K	ø65x126mm



LED BULB FILAMENT ST64			
E27 - Golden Glass			
Socket	E27	CRI	Ra>80
Input Voltage	AC220-240V 50Hz	IP Rating	IP20
Beam Angle	270°	Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
1795	4W	400lm	100lm/W	2500K	ø64x140 mm
1306	6W	540lm	90lm/W	2500K	ø64x140 mm
1305	8W	700lm	80lm/W	2500K	ø64x140 mm
1322	8W	700lm	80lm/W	2500K	ø64x140 mm





LED BULB FILAMENT A60					
E27 - Golden Glass					
Socket	E27	CRI	Ra>80		
Input Voltage	AC220-240V 50Hz	IP Rating	IP20		
Beam Angle	300°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1796	8W	700lm	88lm/W	2500K	ø64x140 mm
1324	8W	720lm	90lm/W	2500K	ø64x140 mm



LED BULB FILAMENT G95			
E27 - Golden Glass			
Socket	E27	CRI	Ra>80
Input Voltage	AC220-240V 50Hz	IP Rating	IP20
Beam Angle	270°	Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
1794	4W	400lm	100lm/W	2500K	ø95x135 mm



LED BULB FILAMENT G125					
E27					
Socket	E27	CRI		Ra>80	
Input Voltage	AC175-265V 50Hz	IP Rating		IP20	
Beam Angle	300°	Dimmable		No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1863	4W	400lm	100lm/W	4500K	ø125x165 mm
1862	4W	400lm	100lm/W	2700K	ø125x165 mm
1861	6.5W	810lm	125lm/W	4500K	ø125x165 mm
1860	6.5W	810lm	125lm/W	2700K	ø125x165 mm



LED BULB FILAMENT G45					
E14 - Golden Glass					
Socket	E14	CRI		Ra>80	
Input Voltage	AC175-265V 50Hz	IP Rating		IP20	
Beam Angle	300°	Dimmable		No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1492	4W	400lm	100lm/W	2500K	ø45x78 mm
1418	4W	400lm	100lm/W	2500K	ø45x78 mm



LED BULB FILAMENT G45					
E27					
Socket	E27	CRI		Ra>80	
Input Voltage	AC175-265V 50Hz	IP Rating		IP20	
Beam Angle	300°	Dimmable		No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1864	2W	200lm	100lm/W	6000K	ø45x75 mm
1865	2W	200lm	100lm/W	4500K	ø45x75 mm
1866	2W	200lm	100lm/W	2700K	ø45x75 mm
1867	4W	400lm	100lm/W	6000K	ø45x75 mm
1868	4W	400lm	100lm/W	4500K	ø45x75 mm
1869	4W	400lm	100lm/W	2700K	ø45x75 mm
1325	4W	400lm	100lm/W	2700K	ø45x78 mm



LED CANDLE FILAMENT C35					
E14 - Golden Glass - Tip					
Socket	E14	CRI		Ra>80	
Input Voltage	AC175-265V 50Hz	IP Rating		IP20	
Beam Angle	300°	Dimmable		No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1491	4W	400lm	100lm/W	2500K	ø35x120 mm
1416	4W	400lm	100lm/W	2500K	ø35x120 mm



LED BULB FILAMENT G45					
E27 - Golden Glass					
Socket	E27	CRI		Ra>80	
Input Voltage	AC175-265V 50Hz	IP Rating		IP20	
Beam Angle	300°	Dimmable		YES	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1326	4W	320lm	100lm/W	2500K	ø95x135 mm



LED BULB FILAMENT C35					
E14 - Golden Glass					
Socket	E14	CRI		Ra>80	
Input Voltage	AC175-265V 50Hz	IP Rating		IP20	
Beam Angle	300°	Dimmable		No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1490	4W	400lm	100lm/W	2500K	ø35x98 mm



LED FILAMENT CANDLE C35	
E14	
Input Voltage	AC175-265V 50Hz
Beam Angle	300°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
1470	4W	400lm	100lm/W	6000K	ø35x98mm
1471	4W	400lm	100lm/W	4500K	ø35x98mm
1472	4W	400lm	135lm/W	2700K	ø35x98mm
1410	6W	730lm	122lm/W	6000K	ø35x98mm
1411	6W	730lm	122lm/W	4500K	ø35x98mm
1412	6W	730lm	122lm/W	2700K	ø35x98mm
1469	4W	400lm	100lm/W	4500K	ø35x98mm
1473	4W	400lm	100lm/W	2700K	ø35x98mm



LED FILAMENT BULB G45	
E14	
Input Voltage	AC175-265V 50Hz
Beam Angle	300°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
1474	2W	200lm	100lm/W	6000K	ø45x78 mm
1475	2W	200lm	100lm/W	4500K	ø45x78 mm
1476	2W	200lm	100lm/W	2700K	ø45x78 mm
1477	4W	400lm	100lm/W	6000K	ø45x78 mm
1478	4W	400lm	100lm/W	4500K	ø45x78 mm
1479	4W	400lm	100lm/W	2700K	ø45x78 mm
1417	4W	400lm	100lm/W	2700K	ø45x78 mm



LED FILAMENT CANDLE C35					
E14 - Tip					
Socket		E14	CRI		Ra>80
Input Voltage		AC175-265V 50Hz	IP Rating		IP20
Beam Angle		300°	Dimmable		No
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1480	4W	400lm	100lm/W	6000K	ø35x115 mm
1481	4W	400lm	100lm/W	4500K	ø35x115 mm
1482	4W	400lm	100lm/W	2700K	ø35x115 mm
1415	4W	400lm	100lm/W	2700K	ø35x115 mm




LED CANDLE FILAMENT C35					
E14 - Tip					
Socket	E14	CRI	Ra>80		
Input Voltage	AC175-265V 50Hz	IP Rating	IP20		
Beam Angle	300°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Colour	Dimension
1414	4W	400lm	100lm/W	2500K	ø35x115 mm



LED BULB FILAMENT C35					
E14					
Socket	E14	CRI	Ra>80		
Input Voltage	AC175-265V 50Hz	IP Rating	IP20		
Beam Angle	300°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
1413	4W	400lm	100lm/W	2500K	ø35x98 mm




LED INDUSTRIAL BULB	
40W E27	
Input Voltage	180-264V 50/60Hz
Beam Angle	270°
CRI	Ra>80
IP Rating	IP20
Dimmable	No



SKU	Watt	Lumen	Lumen/W	Color	Dimension
225	40W	4100lm	100m/W	6000K	ø90x212 mm
226	40W	4100lm	100lm/W	4500K	ø90x212 mm



LED INDUSTRIAL BULB	
50W E40	
Input Voltage	110-264V 50/60Hz
Beam Angle	270°
CRI	Ra>80
IP Rating	IP20
Dimmable	No



SKU	Watt	Lumen	Lumen/W	Color	Dimension
221	50W	5000lm	100lm/W	6000K	ø90x212 mm



LED BULB A60	
B22	
Input Voltage	AC220-240V 50Hz
Beam Angle	270°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
1918	9W	820lm	91lm/W	6000K	ø60x110mm
1919	9W	820lm	91lm/W	4500K	ø60x110mm
1920	9W	820lm	91lm/W	2700K	ø60x110mm
1910	10W	800lm	80lm/W	2700K	ø60x110mm
1921	11W	1055lm	96lm/W	6000K	ø60x110mm
1922	11W	1055lm	96lm/W	4500K	ø60x110mm
1923	11W	1055lm	96lm/W	2700K	ø60x110mm
1914	12W	960lm	80lm/W	2700K	ø60x105mm
1915	15W	1500lm	100lm/W	6000K	ø65x110mm
1916	15W	1500lm	100lm/W	4500K	ø65x110mm
1917	15W	1500lm	100lm/W	2700K	ø65x110mm



PORTABLE LED SOLAR BULB			
Solar Panel Power: 6V 2.3W			
Voltage	DC 6V	CRI	Ra>80
Flux	650lm	IP Rating	IP20
Beam Angle	360°	Body Color	White
Battery	3.2V 10Ah	Dimension	Φ110x195mm

SKU	229
Color	6000K




LED CANDLE C37	
B22	
Input Voltage	AC220-240V 50Hz
Beam Angle	180°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
1950	6W	480lm	91lm/W	6000K	ø37x90mm
1951	6W	480lm	91lm/W	4500K	ø37x90mm
1952	6W	480lm	91lm/W	2700K	ø37x90mm
1953	6W	480lm	80lm/W	2700K	ø37x90mm



NEW

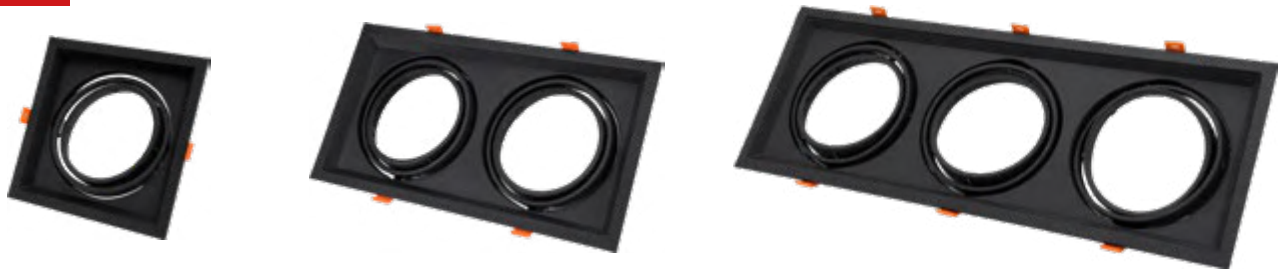

SPOTLIGHT FIXTURE			
AR111 Fitting - Adjustable			
Socket	AR111	Material	Пластиц
Body Color	Black	IP Rating	IP20

SKU	GU10 Holder	Cut Size	Dimension
5087	1xAR111	150x150mm	185x185x42mm
5088	2xAR111	300x150mm	335x185x42mm
5089	3xAR111	450x150mm	485x185x42mm



SKU	Shape	Cut Size	Dimension
2013	Round	ø85-95mm	ø98x38mm
2014	Square	90x90mm	100x100x40mm

SPOTLIGHT FIXTURE			
GU10 Fitting - Adjustable			
Socket	GU10	Material	Aluminium
Color	White/Black	IP Rating	IP20




SPOTLIGHT FIXTURE			
AR111 Fitting - Adjustable			
Socket	AR111	Material	Aluminium
Body Color	White	IP Rating	IP20

SKU	GU10 Holder	Cut Size	Dimension
5081	1xAR111	150x150mm	185x185x42mm
5083	2xAR111	300x150mm	335x185x42mm
5085	3xAR111	450x150mm	485x185x42mm




SKU	GU10 Holder	Cut Size	Dimension
2015	2xGU10	175x90mm	185x100x38mm
2016	3xGU10	260x90mm	270x100x38mm

SPOTLIGHT FIXTURE			
GU10 Fitting - Adjustable			
Socket	GU10	Material	Aluminium
Color	White/Black	IP Rating	IP20

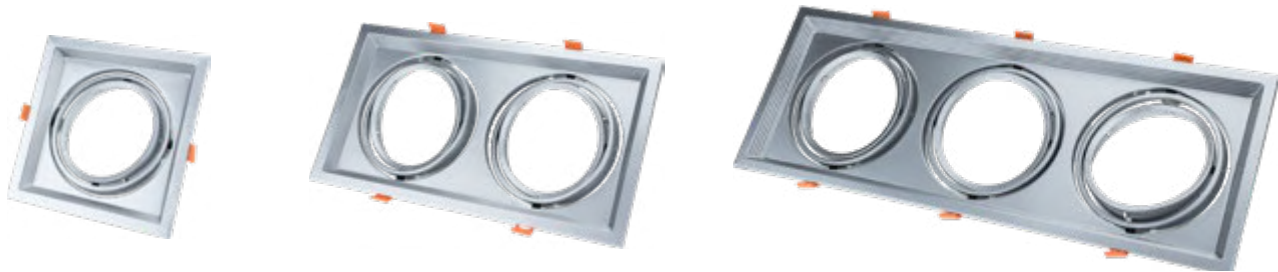

SPOTLIGHT FIXTURE			
AR111 Fitting - Adjustable			
Socket	AR111	Material	Aluminium
Body Color	Silver	IP Rating	IP20

SKU	GU10 Holder	Cut Size	Dimension
5082	1xAR111	150x150mm	185x185x42mm
5084	2xAR111	300x150mm	335x185x42mm
5086	3xAR111	450x150mm	485x185x42mm

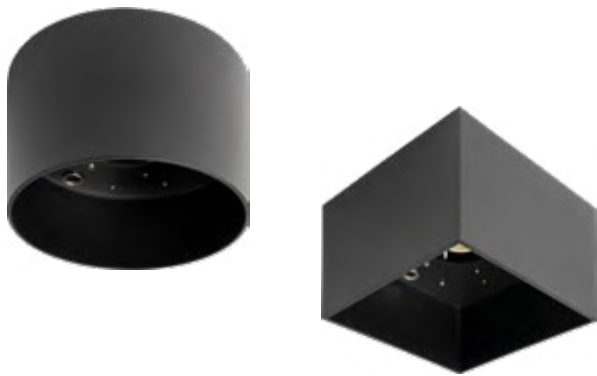

SKU	Shape	Dimension
2082	Round	ø120x80mm
2083	Square	120x120x80mm

SPOTLIGHT FIXTURE			
GU10 Fitting			
Socket	GU10	Material	Aluminium
Color	Black	IP Rating	IP20



SPOTLIGHT FIXTURE
MR16 ; GU10 Fitting - Adjustable

Material	Aluminium	IP Rating	IP20
Dimension	ø83x29mm	Cut Size	ø72mm



SKU	5170	5171	5172
Color	White	Inox	Chrome



SPOTLIGHT FIXTURE
MR16 ; GU10 Fitting

Material	Iron	IP Rating	IP20
Dimension	82x82x29mm	Cut Size	ø72mm

SKU	5073	5074	5075
Color	White	Inox	Chrome



SPOTLIGHT FIXTURE
MR16 ; GU10 Fitting - Adjustable

Material	Iron	IP Rating	IP20
Dimension	ø83x29mm	Cut Size	ø72mm



SKU	5097	5098	5099
Color	White	Inox	Chrome



SPOTLIGHT FIXTURE
MR16 ; GU10 Fitting - Adjustable

Material	Iron	IP Rating	IP20
Dimension	82x82x29mm	Cut Size	ø72mm




SKU	5076	5077	5078
Color	White	Inox	Chrome



SPOTLIGHT FIXTURE
MR16 ; GU10 Fitting

Material	Iron	IP Rating	IP20
Dimension	ø83x29mm	Cut Size	ø72mm

SKU	5070	5071	5072
Color	White	Inox	Chrome

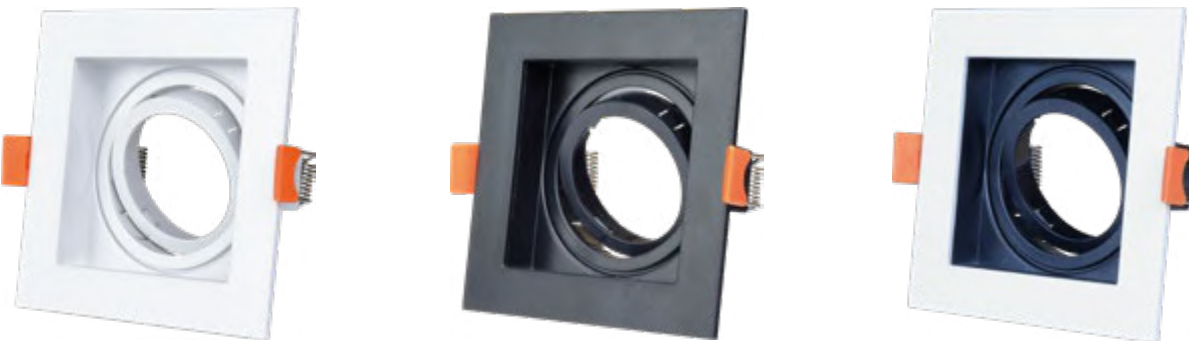

SPOTLIGHT FIXTURE
GU10 Fitting - Adjustable

Socket	GU10	Material	Plastic
Cut Size	90x90mm	Max Power	50W
Dimension	102x102x42mm	IP Rating	IP20



SKU	2050	2051	2052
Color	White	Black	White Black



SPOTLIGHT FIXTURE			
GU10 Fitting			
Socket	GU10	Material	Aluminium
Cut Size	ø70mm	Max Power	35W
Dimension	ø80x35mm	IP Rating	IP20

SKU	2047	2048	2049
Color	White	Black	Rose Gold



SPOTLIGHT FIXTURE			
GU10 Fitting - Adjustable			
Socket	GU10	Material	Alu+PC
Cut Size	ø70-80mm	Max Power	35W
Dimension	ø83x42mm	IP Rating	IP20



SKU	2031	2032	2035	2036
Color	White	Black	White	Black



SPOTLIGHT FIXTURE			
GU10 Fitting			
Socket	GU10	Material	Aluminium
Cut Size	75x75mm ; ø85mm	Max Power	35W
Dimension	75x75x55 ; ø85x50mm	IP Rating	IP20

SKU	2045	2046
Color	Square	Round



SPOTLIGHT FIXTURE			
GU10 Fitting - Adjustable			
Socket	GU10	Material	Alu+PC
Cut Size	ø70-80mm	Max Power	35W
Dimension	ø83x42mm	IP Rating	IP20



SKU	2033	2034	2037	2038
Color	White	Black	White	Black



SPOTLIGHT FIXTURE			
GU10 Fitting - Waterproof			
Socket	GU10	Material	Aluminium
Cut Size	ø70mm	Max Power	35W
Dimension	ø80x54 ; 82x82x57mm	IP Rating	IP65



	Round		Square	
SKU	2009	2010	2011	2012
Color	White	Nikel	White	Nikel



SPOTLIGHT FIXTURE			
GU10 Fitting - Trimless Recessed			
Socket	GU10	Material	Gypsum
Cut Size	ø95 ; 95x95mm	Max Power	35W
Dimension	ø100x27 ; 100x100mm	IP Rating	IP20

SKU	2060	2061
Shape	Round	Square



SPOTLIGHT FIXTURE			
GU10 Fitting - Trimless Recessed			
Socket	GU10	Material	Gypsum
Cut Size	ø125 ; 115x115mm	Max Power	35W
Dimension	ø130x50 ; 120x120mm	IP Rating	IP20

SKU	2062	2063
Shape	Round	Square



SPOTLIGHT FIXTURE			
GU10 Fitting - Trimless Recessed			
Socket	GU10	Material	Gypsum
Cut Size	ø120 ; ø130mm	Max Power	35W
Dimension	ø120 ; ø130x70mm	IP Rating	IP20

SKU	2068	2069
Shape	Round	Round



SPOTLIGHT FIXTURE			
GU10 Fitting - Trimless Recessed			
Socket	GU10	Material	Gypsum
Cut Size	115x115 ; 210x110mm	Max Power	35W
Dimension	120x120 ; 210x110x58mm	IP Rating	IP20


SKU	2064	2065
Socket	1xGu10	2xGu10



SPOTLIGHT FIXTURE			
GU10 Fitting - Trimless Recessed			
Socket	GU10	Material	Gypsum
Cut Size	115x115 ; 210x110mm	Max Power	35W
Dimension	120x120 ; 210x110x58mm	IP Rating	IP20

SKU	2066	2067
Socket	1xGu10	2xGu10



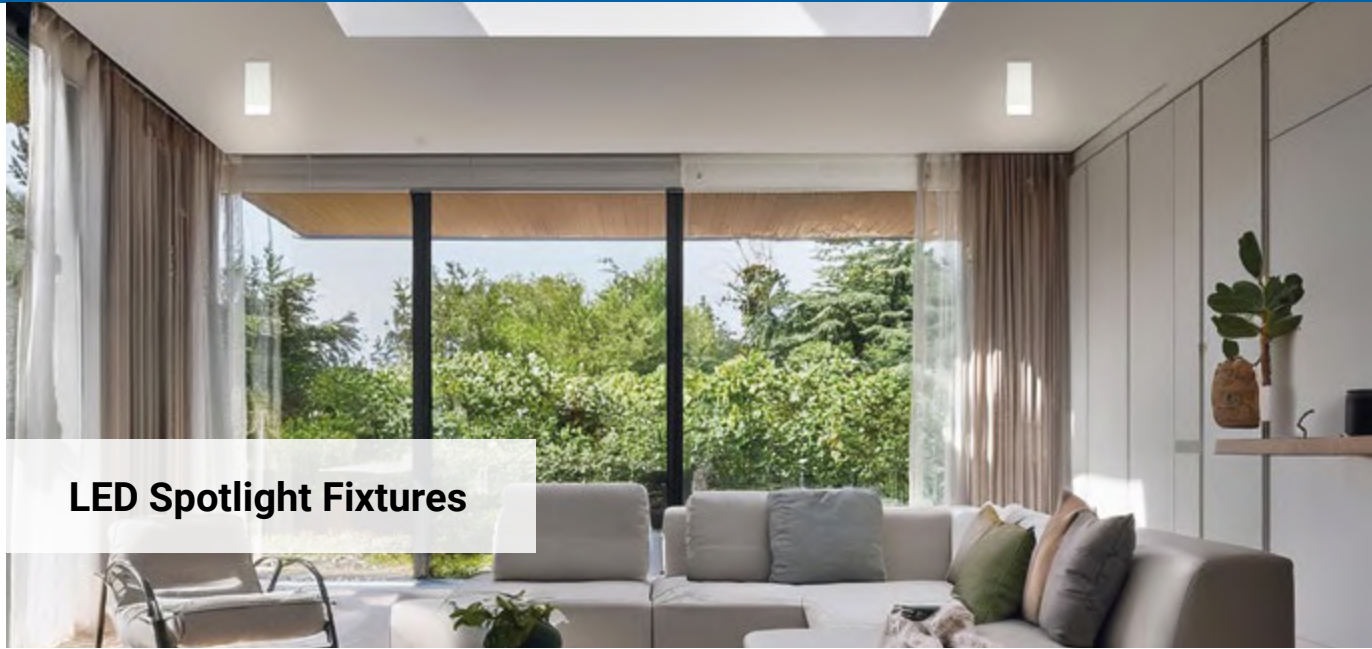

LED Spotlight Fixtures



SKU 12886
Size 167x118x108mm

SPOTLIGHT FIXTURE			
E14 Fitting			
Socket	2xE14	Material	Steel+Glass
Input Voltage	AC220-240V 50Hz	Max Power	10W Each
Color	Black+White	IP Rating	IP20



SKU 12887
Size 100x178x603mm

SPOTLIGHT FIXTURE			
E14 Fitting			
Socket	3xE14	Material	Steel+Glass
Input Voltage	AC220-240V 50Hz	Max Power	10W Each
Color	Black+White	IP Rating	IP20



SKU 12883
Size 105x100x165mm

SPOTLIGHT FIXTURE			
E14 Fitting			
Socket	E14	Material	Steel+Glass
Input Voltage	AC220-240V 50Hz	Max Power	10W Each
Color	Black+White	IP Rating	IP20



SKU 12884
Size 220x190x165mm

SPOTLIGHT FIXTURE			
E14 Fitting			
Socket	2xE14	Material	Steel+Glass
Input Voltage	AC220-240V 50Hz	Max Power	10W Each
Color	Black+White	IP Rating	IP20



SKU 12885
Size 224x221x149mm

SPOTLIGHT FIXTURE			
E14 Fitting			
Socket	3xE14	Material	Steel+Glass
Input Voltage	AC220-240V 50Hz	Max Power	10W Each
Color	Black+White	IP Rating	IP20



NEW



SKU	12880
Size	155x145x103mm

SPOTLIGHT FIXTURE

E14 Fitting

Socket	E14	Material	Steel+Glass
Input Voltage	AC220-240V 50Hz	Max Power	10W Each
Color	Black+White	IP Rating	IP20





SKU	2070	2071
Size	ø70x70mm	ø70x170mm

SPOTLIGHT FIXTURE

GU10 Fitting

Socket	GU10	Material	Gypsum
Input Voltage	AC220-240V 50Hz	Max Power	35W
Color	White	IP Rating	IP20



NEW



SKU	12881
Size	182x118x108mm

SPOTLIGHT FIXTURE

E14 Fitting

Socket	E14	Material	Steel+Glass
Input Voltage	AC220-240V 50Hz	Max Power	10W Each
Color	Black+White	IP Rating	IP20





SKU	2072	2073
Size	70x70x70mm	70x70x170mm

SPOTLIGHT FIXTURE

GU10 Fitting

Socket	GU10	Material	Gypsum
Input Voltage	AC220-240V 50Hz	Max Power	35W
Color	White	IP Rating	IP20



NEW




SKU	12882
Size	162x140x100mm

SPOTLIGHT FIXTURE

E14 Fitting

Socket	E14	Material	Steel+Glass
Input Voltage	AC220-240V 50Hz	Max Power	10W Each
Color	Black+White	IP Rating	IP20

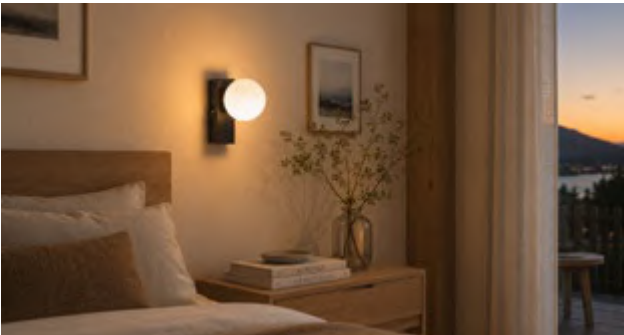



SKU	2074	2075
Size	ø110x140mm	110x110x125mm

SPOTLIGHT FIXTURE

GU10 Fitting

Socket	GU10	Material	Gypsum
Input Voltage	AC220-240V 50Hz	Max Power	35W
Color	White	IP Rating	IP20





SKU	2042	2043	2044
Color	Black	White	Rose Gold

SPOTLIGHT FIXTURE			
GU10 Fitting			
Socket	GU10	Material	Aluminium
Input Voltage	AC220-240V 50Hz	Max Power	35W
Size	ø80x140mm	IP Rating	IP20





SKU	2001	2002	2005	2006
Color	White	Black	White	Black


SPOTLIGHT FIXTURE			
GU10 Fitting - Adjustable			
Socket	GU10	Material	Plastic
Input Voltage	AC220-240V 50Hz	Max Power	10W
Size	ø80x125mm	IP Rating	IP20





SKU	2039	2040	2041
Color	Black	White	Rose Gold

SPOTLIGHT FIXTURE			
GU10 Fitting			
Socket	GU10	Material	Aluminium
Input Voltage	AC220-240V 50Hz	Max Power	35W
Size	75x75x140mm	IP Rating	IP20

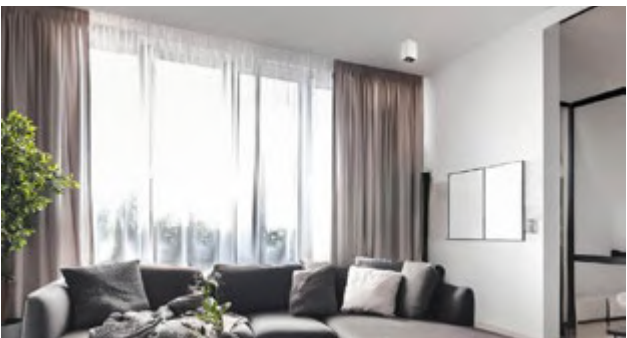



SKU	2003	2004	2007	2008
Color	White	Black	White	Black

SPOTLIGHT FIXTURE			
GU10 Fitting - Adjustable			
Socket	GU10	Material	Plastic
Input Voltage	AC220-240V 50Hz	Max Power	10W
Size	85x85x130mm	IP Rating	IP20





SKU	2029	2030
Color	White	Black

SPOTLIGHT FIXTURE			
GU10 Fitting			
Socket	GU10	Material	Aluminium
Input Voltage	AC220-240V 50Hz	Max Power	35W
Size	ø60x100mm	IP Rating	IP20





SKU	2027	2028
Color	White	Black

SPOTLIGHT FIXTURE			
GU10 Fitting - Adjustable			
Socket	GU10	Material	Aluminium
Input Voltage	AC220-240V 50Hz	Max Power	35W
Size	ø80x42mm	IP Rating	IP20





SPOTLIGHT FIXTURE			
GU10 Fitting - Adjustable			
Socket	GU10	Material	Plastic
Input Voltage	AC220-240V 50Hz	Max Power	10W Each
Body Color	White	IP Rating	IP20

SKU	GU10 Holder	Dimension
2021	1xGU10	ø60x150mm
2023	2xGU10	ø120x150mm
2025	3xGU10	ø145x150mm



SPOTLIGHT FIXTURE			
GU10 Fitting - Adjustable			
Socket	GU10	Material	Aluminium
Input Voltage	AC220-240V 50Hz	Max Power	35W Each
Body Color	White	IP Rating	IP20

SKU	GU10 Holder	Dimension
9076	1xGU10	60x1108mm
9077	2xGU10	300x60x180mm
9078	3xGU10	540x60x180mm
9079	4xGU10	720x60x180mm



SPOTLIGHT FIXTURE			
GU10 Fitting - Adjustable			
Socket	GU10	Material	Plastic
Input Voltage	AC220-240V 50Hz	Max Power	10W Each
Body Color	Black	IP Rating	IP20

SKU	GU10 Holder	Dimension
2022	1xGU10	ø60x150mm
2024	2xGU10	ø120x150mm
2026	3xGU10	ø145x150mm



SPOTLIGHT FIXTURE			
GU10 Fitting - Adjustable			
Socket	GU10	Material	Aluminium
Input Voltage	AC220-240V 50Hz	Max Power	35W Each
Body Color	Black	IP Rating	IP20

SKU	GU10 Holder	Dimension
9072	1xGU10	60x108mm
9073	2xGU10	300x60x180mm
9074	3xGU10	540x60x180mm
9075	4xGU10	720x60x180mm



SKU	2080	2081
Color	White	Black

SPOTLIGHT FIXTURE			
GU10 Fitting -Adjustable			
Socket	2xGU10	Material	Aluminium
Input Voltage	AC220-240V 50Hz	Max Power	35W
Size	160x80x86mm	IP Rating	IP20



NEW



SPOTLIGHT FIXTURE			
GU10 Fitting - Adjustable			
Socket	GU10	Material	Steel+ALU
Input Voltage	AC220-240V 50Hz	Max Power	10W Each
Body Color	Sand White	IP Rating	IP20

SKU	GU10 Holder	Dimension
12892	1xGU10	ø100x125mm
12894	2xGU10	ø191x125mm
12896	3xGU10	ø202x125mm
12898	4xGU10	210x210x125mm

NEW



SPOTLIGHT FIXTURE			
GU10 Fitting - Adjustable			
Socket	GU10	Material	Steel+ALU
Input Voltage	AC220-240V 50Hz	Max Power	10W Each
Body Color	Black	IP Rating	IP20

SKU	GU10 Holder	Dimension
12893	1xGU10	ø100x125mm
12895	2xGU10	ø191x125mm
12897	3xGU10	ø202x125mm
12899	4xGU10	210x210x125mm



NEW



WALL LIGHT FIXTURE AND PENDANTS			
E27 Holder			
Socket	E27	Material	Steel
Input Voltage	AC220-240V 50Hz	Max Power	12W Each
Body Color	Black	IP Rating	IP20

SKU	E27 Holder	Dimension
12888	1xE27	190x156x196
12889	1xE27	ø156x1205mm
12890	2xE27	ø190x1205mm
12891	3xE27	ø201x1205mm





SKU	9063	9062	9064	9065	9066
Color	White	Black	Gold	Copper	Chrome

LED PENDANT

GU10 Fitting

Socket	GU10	Material	Aluminium
Input Voltage	AC220-240V 50Hz	Max Power	35W
Size	ø55x295x1000mm	IP Rating	IP20






SKU	9068	9067	9069	9070	9071
Color	White	Black	Gold	Coffee Gold	Chrome

LED PENDANT

GU10 Fitting

Socket	GU10	Material	Aluminium
Input Voltage	AC220-240V 50Hz	Max Power	35W
Size	ø55x295x1000mm	IP Rating	IP20

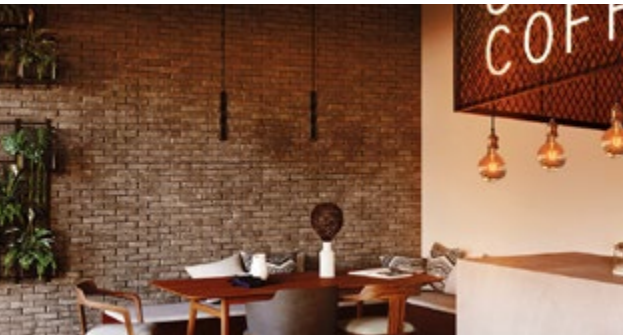




SKU	9059	9058
Color	White	Black

LED PENDANT

GU10 Fitting

Socket	GU10	Material	Aluminium
Input Voltage	AC220-240V 50Hz	Max Power	35W
Size	ø60x500x1200mm	IP Rating	IP20

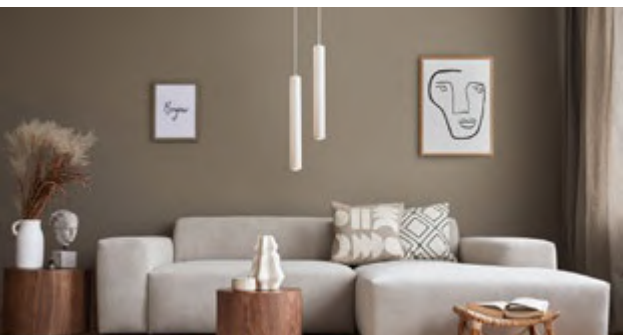




SKU	9083	9082	9080	9081
Color	White	Black	Silver	Grape Red

LED PENDANT

GU10 Fitting

Socket	GU10	Material	Aluminium
Input Voltage	AC220-240V 50Hz	Max Power	35W
Size	ø60x400x1200mm	IP Rating	IP20

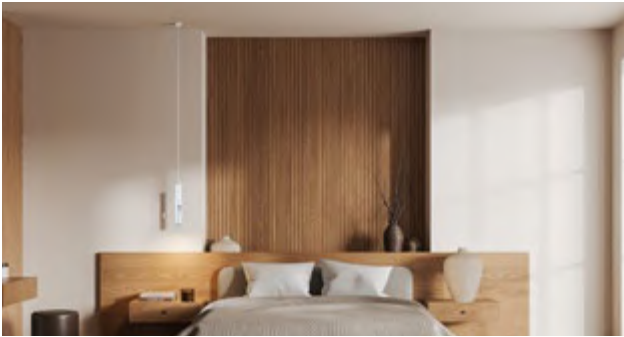



SKU	9055	9054	9051	9050
Color	White	White Gold	Black	Black Gold

LED PENDANT

GU10 Fitting

Socket	GU10	Material	Aluminium
Input Voltage	AC220-240V 50Hz	Max Power	35W
Size	ø60x300x1200mm	IP Rating	IP20





SKU	9057	9056	9053	9052
Color	White	White Gold	Black	Black Gold

LED PENDANT

GU10 Fitting

Socket	GU10	Material	Aluminium
Input Voltage	AC220-240V 50Hz	Max Power	35W
Size	ø60x500x1200mm	IP Rating	IP20





SKU

Color

9099

White

9098

Black



Included

LED PENDANT + GU10

E27 Fitting

Power	5W	Material	Aluminium
Input Voltage	AC220-240V 50Hz	Beam Angle	38°
Lumen	400lm	IP Rating	IP20
Size	ø60x500x1200mm	Color	2700K





SKU

Color

9085

White

9084

Black

9086

Gold

9087

Rose Gold

LED PENDANT

E27 Fitting

Socket	E27	Material	Aluminium
Input Voltage	AC220-240V 50Hz	Max Power	35W
Size	ø40x250x1000mm	IP Rating	IP20





SKU

Color

9061

White

9060

Black

LED PENDANT

GU10 Fitting

Socket	GU10	Material	Aluminium
Input Voltage	AC220-240V 50Hz	Max Power	35W
Size	ø40x250x1000mm	IP Rating	IP20





SKU

Color

9047

Bronze

9049

Antique Gold

9046

Pearl Black

9048

Rose Gold

LED PENDANT

E27 Fitting

Socket	E27	Material	Aluminium
Input Voltage	AC220-240V 50Hz	Max Power	60W
Size	100x1120mm	IP Rating	IP20





SKU

Color

9027

Rope

LED PENDANT

E27 Fitting

Socket	E27	Material	Aluminium
Input Voltage	AC220-240V 50Hz	Max Power	60W
Size	100x1500mm	IP Rating	IP20





SKU

Color

9029

White

9028

Black

LED PENDANT

E27 Fitting

Socket	E27	Material	Aluminium
Input Voltage	AC220-240V 50Hz	Max Power	60W
Size	100x1120mm	IP Rating	IP20





LED PENDANTS

NEW

Max Power - 60W

Socket	E27	Material	Metal + EPS
Input Voltage	AC220-240V 50Hz	Max Power	60W
Body Color	White/Grey	IP Rating	IP20



SKU	19081	19082	19085	19084	19083
Size	ø500mm	ø300mm	ø450mm	ø260x600mm	300x510mm




LED Ceiling Fans



LED CEILING FAN

18W - 3CCT - Remote Control



Power	18W	Beam Angle	120°
Input Voltage	AC100-240V 50Hz	CRI	Ra>80
Lumens	1440lm	IP Rating	IP20
Size	ø1220mm	Dimmable	No
Material	Metal+ABS	Light	3CCT



	Dark Oak	Light Oak	Walnut
SKU	19108	19109	19110
Body	White	White	Black

NEW



LED CEILING FAN

40W - Remote Control

Forward or reverse function

Power	40W	Blade	3 ABS
Input Voltage	AC220-240V 50Hz	Noise	<45dB
Material	Metal + ABS	Air Flow	1212m3h
Size	ø1403mm	IP Rating	IP20

SKU

19127

Body

Black

CCT

6 Speed

NEW



LED CEILING FAN

18W - 3CCT - Remote Control

Forward or reverse function

Power	18W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	1440lm	IP Rating	IP20
Size	ø1320mm	Dimmable	No
Material	ABS+Acrylic	Light	3CCT

SKU

19128

Body

White

CCT

6 Speed

NEW



LED CEILING FAN

32W - 3CCT - Remote Control

Forward or reverse function

Power	32W	Beam Angle	120°
Input Voltage	AC100-240V 50Hz	CRI	Ra>80
Lumens	2560lm	IP Rating	IP20
Size	ø1220mm	Dimmable	Yes
Material	ABS+PC	Light	3CCT

SKU

19126

Body

Wood

CCT

6 Speed

NEW



LED CEILING FAN

24W - 3CCT - Remote Control

Forward or reverse function

Power	24W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	1920lm	IP Rating	IP20
Size	ø480mm	Dimmable	Yes
Material	ABS	Light	3CCT

SKU


19125

Body

White

CCT

6 Speed

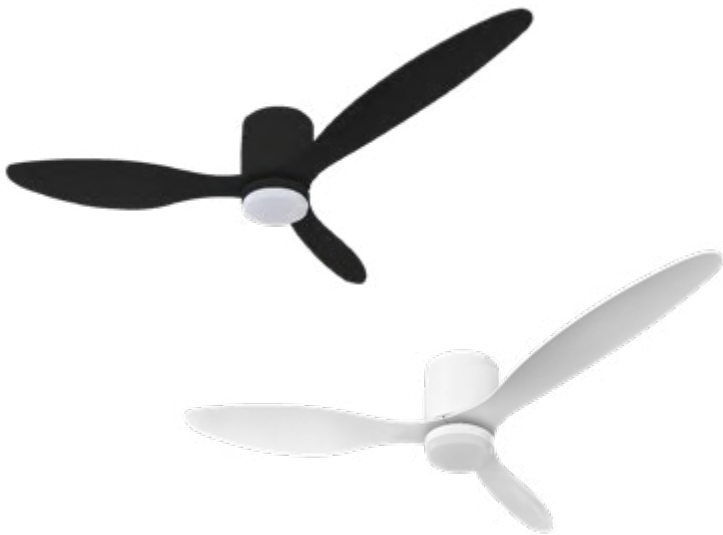

LED CEILING FAN

18W - 3CCT - Remote Control

Forward or reverse function

Power	18W	Beam Angle	120°
Input Voltage	AC100-240V 50Hz	CRI	Ra>80
Lumens	1440lm	IP Rating	IP20
Size	ø1067mm	Dimmable	Yes
Material	ABS	Light	3CCT

SKU

19113

Body

White

SKU

19114

Body

Black

CCT

6 Speed



LED CEILING FAN

18W - 3CCT - Remote Control

Forward or reverse function

Power	18W	Beam Angle	120°
Input Voltage	AC100-240V 50Hz	CRI	Ra>80
Lumens	1440lm	IP Rating	IP20
Size	ø1168mm	Dimmable	No
Material	Metal-ABS	Light	3CCT

SKU

19111

Body

White

SKU

19112

Body

Black

CCT

6 Speed



LED CEILING FAN

36W - 3CCT - Remote Control

Forward or reverse function

Power	36W	Beam Angle	120°
Input Voltage	AC100-240V 50Hz	CRI	Ra>80
Lumens	2880lm	IP Rating	IP20
Size	ø1067mm	Dimmable	No
Material	ABS	Light	3CCT

SKU

19103

Body

White

SKU

19102

Body

Black

CCT

6 Speed

NEW



LED CEILING FAN BULB E27
11W - 3CCT - E27

Power	11W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	880lm	IP Rating	IP20
Size	ø420x200mm	Dimmable	Yes
Material	Plastic	Light	3CCT

SKU19100

BodyWhite

NEW



LED CEILING FAN
18W - 3CCT - Remote Control - Memory Function

Forward or reverse function

Power	18W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	1440lm	IP Rating	IP20
Size	ø1060x400mm	Dimmable	No
Material	Metal+ABS	Light	3CCT

WhiteBlackLight OakWalnut

SKU19120191211912219123

BodyWhiteBlackWhiteBlack

NEW



LED CEILING FAN
18W - 3CCT - Remote Control

Forward or reverse function

Power	18W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	1440lm	IP Rating	IP20
Size	ø1320x380mm	Dimmable	No
Material	Metal-ABS	Light	3CCT

SKU19124

BodyWhite+Wood

NEW



LED CEILING FAN
30W - 3CCT - Remote Control

Forward or reverse function

Power	30W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	2400lm	IP Rating	IP20
Size	ø1060x360mm	Dimmable	Yes
Material	Metal-ABS	Light	3CCT

SKU1911819119

BodyWhiteWhite+Wood

NEW



LED CEILING FAN
20W - 3CCT - Remote Control

Forward or reverse function

Power	20W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	1600lm	IP Rating	IP20
Size	ø710x360mm	Dimmable	Yes
Material	Metal-Plastic	Light	3CCT

SKU19117

BodyWhite

NEW



LED CEILING FAN
36W - 3CCT - Remote Control

Forward or reverse function

Power	36W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	2880lm	IP Rating	IP20
Size	ø500x200mm	Dimmable	Yes
Material	Metal-ABS	Light	3CCT

SKU1911519116

BodyWhiteWhite+Wood



LED CEILING FAN - Slim
36W - 3CCT - Remote Control

Power	36W	Beam Angle	120°
Input Voltage	AC100-240V 50Hz	CRI	Ra>80
Lumens	2880lm	IP Rating	IP20
Size	ø1067mm	Dimmable	Yes
Material	Metal+ABS	Light	3CCT

SKU	19104	19105	CCT	6 Speed
Body	White	Black		



LED CEILING FAN
36W - 3CCT - Remote Control

Power	36W	Beam Angle	120°
Input Voltage	AC100-240V 50Hz	CRI	Ra>80
Lumens	2880lm	IP Rating	IP20
Size	ø480mm	Dimmable	Yes
Material	ABS	Light	3CCT

SKU	19106	19107	CCT	6 Speed
Body	White	White/Black		



LED CEILING FAN BULB E27
12W - 3CCT - Remote Control

Power	12W	Beam Angle	120°
Input Voltage	AC85-265V 50Hz	CRI	Ra>80
Lumens	960lm	IP Rating	IP20
Size	ø420mm	Dimmable	Yes
Material	PC	Light	3CCT

SKU	19101	CCT	3 Speed
Body	White		



LED Pendants



SKU	19065	IP20
Color	3000K	

LED PENDANT LAMP
40W Sand Black

Power	40W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	3200lm	IP Rating	IP20
Size	ø630x30x1900mm	Dimmable	No





SKU 19047
Color 3000K



LED PENDANT LAMP			
13W Sand Black			
Power	13W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	1040lm	IP Rating	IP20
Size	1050x150mm	Dimmable	No





SKU 19051
Color 3000K



LED PENDANT LAMP			
23W Sand Black			
Power	23W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	1840lm	IP Rating	IP20
Size	ø600x100mm	Dimmable	No





SKU 19048
Color 3000K



LED PENDANT LAMP			
15W Sand Black			
Power	15W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	1200lm	IP Rating	IP20
Size	ø410x190x1000mm	Dimmable	No





SKU 19064
Color 3000K



LED PENDANT LAMP			
24W Sand Black			
Power	24W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	1920lm	IP Rating	IP20
Size	984x260x1200mm	Dimmable	No





SKU 19037
Color 3000K



LED PENDANT LAMP			
17W Sand Black			
Power	17W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	1360lm	IP Rating	IP20
Size	1105x175x950mm	Dimmable	No





SKU 19045
Color 3000K



LED PENDANT LAMP			
24W Sand Black			
Power	24W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	1920lm	IP Rating	IP20
Size	1000x21x1250mm	Dimmable	No





SKU 19041
Color 3000K



LED PENDANT LAMP			
25W Sand Black			
Power	25W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	2000lm	IP Rating	IP20
Size	1050x150x1300mm	Dimmable	No



SKU 19066
Color 3000K



LED PENDANT LAMP			
27W Copper + White			
Power	27W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	2160lm	IP Rating	IP20
Size	ø600x90x1500mm	Dimmable	No



SKU 19038
Color 3000K



LED PENDANT LAMP			
28W Sand Black			
Power	28W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	2240lm	IP Rating	IP20
Size	1200x190x950mm	Dimmable	No



SKU 19069
Color 3000K



LED PENDANT LAMP			
35W Copper			
Power	35W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	2800lm	IP Rating	IP20
Size	ø785x1500mm	Dimmable	No



SKU 19052
Color 3000K



LED PENDANT LAMP			
30W Sand Black			
Power	30W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	2400lm	IP Rating	IP20
Size	1000x300x100mm	Dimmable	No



SKU 19071
Color 3000K



LED PENDANT LAMP			
36W Black			
Power	36W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	2880lm	IP Rating	IP20
Size	1000x950x950mm	Dimmable	No





SKU 19040
Color 3000K



LED PENDANT LAMP

30W Sand Black

Power	30W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	2400lm	IP Rating	IP20
Size	1200x150x950mm	Dimmable	No





SKU 19035
Color 3000K



LED PENDANT LAMP

36W Sand Black

Power	36W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	2880lm	IP Rating	IP20
Size	ø600x46x1450mm	Dimmable	No





SKU 19039
Color 3000K



LED PENDANT LAMP

67W Sand Black

Power	67W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	5360lm	IP Rating	IP20
Size	800x400x1500mm	Dimmable	No





SKU 19036
Color 3000K



LED PENDANT LAMP

60W Sand Black

Power	60W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	4800lm	IP Rating	IP20
Size	ø1000x50x1450mm	Dimmable	No





SKU 19046
Color 3000K



LED PENDANT LAMP

36W Sand Black

Power	36W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	2880lm	IP Rating	IP20
Size	ø630x96x1500mm	Dimmable	No





SKU 19034
Color 3000K



LED PENDANT LAMP

70W Sand Black

Power	70W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	5600lm	IP Rating	IP20
Size	1400x42x1500mm	Dimmable	No





SKU	19001	19002	19003
Color	White	Black	Gold




LED PENDANT LAMP			
30W CCT - Dimmable + Remote Control			
Power	30W	Beam Angle	180°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	2080lm	IP Rating	IP20
Size	ø500x20x1000mm	Dimmable	YES



SKU	19032	19031	19033
Color	White 3000K	Black 3000K	Gold 3000K




LED PENDANT LAMP			
22W			
Power	22W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	1760lm	IP Rating	IP20
Size	ø600x38x1400mm	Dimmable	No

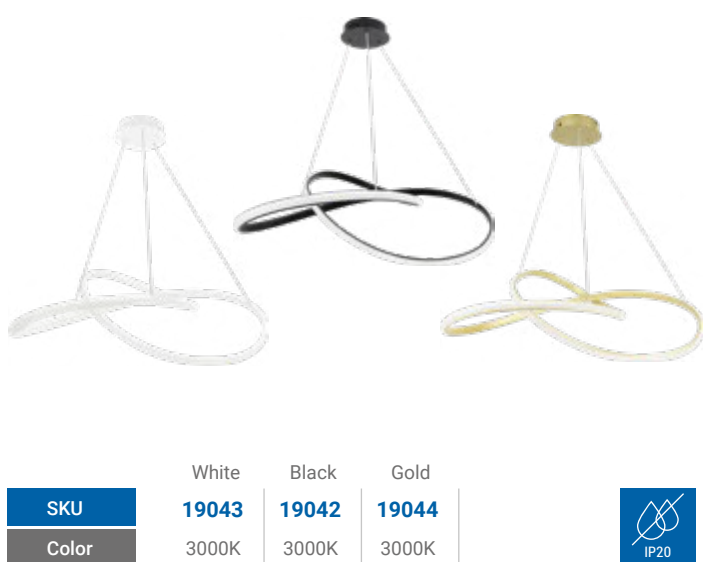

SKU	19043	19042	19044
Color	White 3000K	Black 3000K	Gold 3000K



LED PENDANT LAMP			
30W			
Power	30W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	2400lm	IP Rating	IP20
Size	ø585x135x1500mm	Dimmable	No

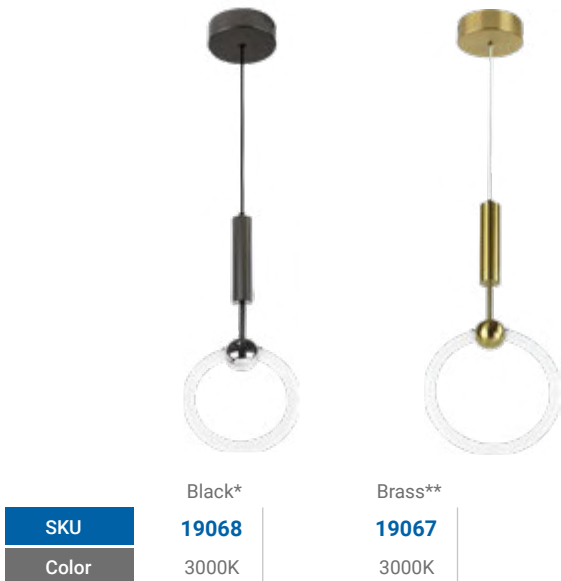

SKU	19068	19067
Color	Black* 3000K	Brass** 3000K

LED PENDANT LAMP			
10W* ; 11W**			
Power	10W ; 11W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	800lm ; 880	IP Rating	IP20
Size	10W - ø200x480mm 11W - ø250x535mm	Dimmable	No



SKU	19004	19005	19006
Color	White	Black	Gold



LED PENDANT LAMP			
78W CCT - Dimmable + Remote Control			
Power	78W	Beam Angle	180°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	4480lm	IP Rating	IP20
Size	ø615x27x1000mm	Dimmable	YES



SKU	19050	19049
Color	White 3000K	Black 3000K

LED PENDANT LAMP			
4W			
Power	4W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	320W	IP Rating	IP20
Size	123x203x1000mm	Dimmable	No





SKU

19058

Color

3000K



LED CEILING/WALL LAMP

9W Sand Black

Power	9W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	720lm	IP Rating	IP20
Size	593x81x65mm	Dimmable	No





SKU

19059

Color

3000K



LED CEILING/WALL LAMP

21W Sand Black

Power	21W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	1680lm	IP Rating	IP20
Size	997x140x48mm	Dimmable	No





SKU

2093

2094

Color

4500K

3000K



LED CEILING/WALL LAMP

16W Black

Power	16W	Beam Angle	90°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	1120lm	IP Rating	IP20
Size	ø60x810x105mm	Dimmable	No





SKU

19061

19060

19062

Color

3000K

3000K

3000K



LED CEILING/WALL LAMP

10W - 3000K

Power	10W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	800lm	IP Rating	IP20
Size	562x120x47mm	Dimmable	No





SKU

2095

2096

Color

3000K

3000K



LED CEILING/WALL LAMP

12W

Power	12W	Beam Angle	160°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	600lm	IP Rating	IP20
Size	316x90x30mm	Dimmable	No





SKU

7551

7552

7553

7554

Color

4000K

3000K

4000K

3000K

Adjustable



LED MIRROR/WALL LAMP

14W - Adjustable

Power	14W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	910lm	IP Rating	IP20
Size	562x120x47mm	Dimmable	No





SKU	White 273	Black 274
Color	CCT	CCT

Touch Control

IP20

LED TABLE LAMP			
3W CCT - Magnetic			
Charging	USB-C cable	Beam Angle	120°
Battery	1200mAh	CRI	Ra>80
Lumens	240lm	IP Rating	IP20
Size	140x360x54mm	Dimmable	Yes





SKU	White 262	Black 261
Color	CCT	CCT

Wireless Charge

Touch Control

IP20

LED DESK LAMP			
5W CCT - Wireless Charging			
Charging	USB-C cable	Beam Angle	120°
Input Voltage	DC 5V	CRI	Ra>80
Lumens	250lm	IP Rating	IP20
Size	385x120x400mm	Dimmable	Yes





SKU	White 271	Black 272
Color	4000K	4000K

Touch Control

IP20

LED TABLE LAMP			
3W - Magnetic			
Charging	USB-C cable	Beam Angle	5-90°
Battery	1200mAh	CRI	Ra>80
Lumens	240lm	IP Rating	IP20
Size	ø34x135mm	Dimmable	Yes





SKU	White 264	Black 263
Color	CCT	CCT

Wireless Charge

Touch Control

IP20

LED DESK LAMP			
7W CCT - Wireless Charging			
Charging	USB-C cable	Beam Angle	120°
Input Voltage	DC 5V	CRI	Ra>80
Lumens	380lm	IP Rating	IP20
Size	265x337x425mm	Dimmable	Yes





SKU	Khaki 275
Color	CCT

Touch Control

IP20

LED TABLE LAMP			
4W - Magnetic			
Charging	USB-C cable	Beam Angle	120°
Battery	2x1200mAh	CRI	Ra>80
Lumens	400lm	IP Rating	IP20
Size	ø180x310mm	Dimmable	Yes





SKU	White 266	Black 265
Color	CCT	CCT

Touch Control

IP20

RECHARGEABLE LED DESK LAMP			
7W CCT - Battery			
Charging	USB-C cable	Beam Angle	120°
Battery	2000mAh	CRI	Ra>85
Lumens	300lm	IP Rating	IP20
Size	370x120x395mm	Dimmable	Yes





SKU	252	251	253
Color	CCT	CCT	CCT

Solar Power

Touch Control

LED SOLAR TABLE LAMP

2.5W CCT - Battery

Charging	USB-C cable	Beam Angle	120°
Battery	2x2200mAh	CRI	Ra>80
Lumens	280lm	IP Rating	IP54
Size	ø128x300mm	Dimmable	Yes





SKU	19056	19055	19057
Color	3000K	3000K	3000K

IP20

LED INTERIOR LAMP

12W

Power	12W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	960lm	IP Rating	IP20
Size	ø210x380mm	Dimmable	No





SKU	255	254	256
Color	CCT	CCT	CCT

Touch Control

LED TABLE LAMP

2.5W CCT - Battery

Charging	USB-C cable	Beam Angle	120°
Battery	2x2200mAh	CRI	Ra>80
Lumens	280lm	IP Rating	IP54
Size	ø104x315mm	Dimmable	Yes





SKU	19054
Color	3000K

IP20

LED INTERIOR LAMP

7W - Sand Black

Power	7W	Beam Angle	360°
Input Voltage	AC2175-265V 50Hz	CRI	Ra>80
Lumens	560lm	IP Rating	IP20
Size	ø260x305mm	Dimmable	No





SKU	268	267	269	270
Color	CCT	CCT	CCT	CCT

Touch Control

LED TABLE LAMP

2.5W CCT - Battery

Charging	USB-C cable	Beam Angle	120°
Battery	2x1500mAh	CRI	Ra>80
Lumens	230lm	IP Rating	IP44
Size	ø110x375mm	Dimmable	Yes





SKU	260
Color	Bronze

IP20

LED INTERIOR LAMP

E27 Socket - Bulb NOT included

Socket	1xE27	Material	Iron
Input Voltage	AC220-240V 50Hz	Cable Length	150cm
Size	ø180x365mm	IP Rating	IP20



SKU

239

Color

RGB+CW





LED FLOOR LIGHT

8W RGB + CW - Remote Control

Voltage	DC 5V 2A	Beam Angle	120°
Adapter	No	CRI	Ra>80
Lumens	220lm	IP Rating	IP20
Size	ø30x1047mm	Dimmable	Yes



SKU

238

Color

RGB+WW






LED FLOOR LIGHT

17W RGB + WW - Remote Control

Voltage	DC12V / 1.5A	Beam Angle	120°
Adapter	Yes - 220V	CRI	Ra>80
Lumens	400lm	IP Rating	IP20
Size	ø23.5x1462mm	Dimmable	Yes

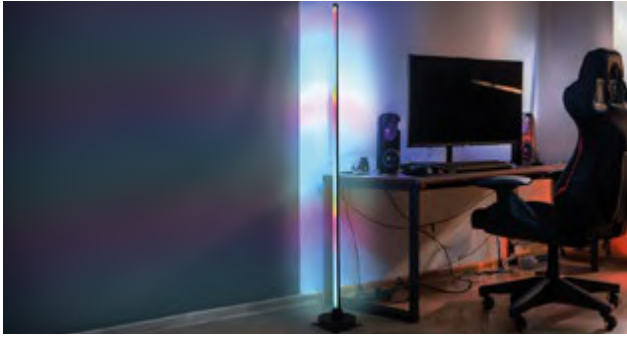

SKU

237

Color

RGB+WW





LED FLOOR LIGHT

20W RGB+WW - Remote Control

Voltage	DC12V / 1.5A	Beam Angle	120°
Adapter	Yes - 220V	CRI	Ra>80
Lumens	500lm	IP Rating	IP20
Size	130x1045mm	Dimmable	Yes





NEW



LED FLOOR LIGHT

PREMIUM LINE

3CCT + RGB - Magnetic Remote Control

Power	40W+8W RGB	Beam Angle	150°
Input Voltage	AC220-240V	CRI	Ra>90
Lumens	4320lm	IP Rating	IP20
Size	385x2000mm	Dimmable	Yes

SKU

257

Color

White

SKU

258

Color

Black







NEW



LED SPHERICAL AMBIENT LIGHT

Tuya App - CCT+ RGB

Power	8W	Beam Angle	270°
Input Voltage	DC12V 1A	CRI	Ra>80
Lumens	520lm	IP Rating	IP20
Size	ø200x192mm	Dimmable	Yes

Product application: Living room, bedroom, indoor spaces, etc.

SKU	259
Color	White



	White	White	Black	Black
SKU	7584	7583	7582	7581
Color	4200K	3000K	4200K	3000K

LED CABINET LIGHT			
2W - ON/OFF Switch			
Power	2W	Beam Angle	38°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	140lm	IP Rating	IP20
Size	φ60x140mm	Dimmable	No



	White	White	Black	Black
SKU	7592	7591	7589	7590
Color	4200K	3000K	4200K	3000K

LED CABINET LIGHT			
8W - ON/OFF Switch + USB A and USB C			
Power	2W	Beam Angle	38°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	140lm	IP Rating	IP20
Size	φ145x80mm	Dimmable	No



	White	White	Black	Black
SKU	7588	7587	7586	7585
Color	4200K	3000K	4200K	3000K

LED CABINET LIGHT			
8W - ON/OFF Switch + USB A and USB C			
Power	8W	Beam Angle	40°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	700lm	IP Rating	IP20
Size	φ145x153mm	Dimmable	No





SKU	7594	7593
Color	4200K	3000K

LED CABINET LIGHT			
11W - ON/OFF Switch + USB A and USB C			
Power	11W	Beam Angle	280°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	700lm	IP Rating	IP20
Size	300x80x126mm	Dimmable	No



	Black	Silver
	240	241
Color	3000K	3000K



LED CABINET LIGHT			
1.5W PIR Sensor - Slim Fit - Battery			
Charging	USB-C cable 5V	Beam Angle	120°
Battery	3.7V 900mAh	CRI	Ra>80
Lumens	100lm	IP Rating	IP20
Size	240x40x10mm	Dimmable	No



SKU	233	234
Color	4000K	3000K



LED CABINET LIGHT			
0.5W Magnetic Control - Battery			
Voltage	DC:1.5V	Beam Angle	120°
Battery	2*AAA	CRI	Ra>80
Lumens	40lm	IP Rating	IP20
Size	45x17x8.4mm	Dimmable	No



	Black	Silver
	242	243
Color	3000K	3000K




LED CABINET LIGHT			
3.5W PIR Sensor - Slim Fit - Battery			
Charging	USB-C cable 5V	Beam Angle	120°
Battery	3.7V 2200mAh	CRI	Ra>80
Lumens	230lm	IP Rating	IP20
Size	600x40x10mm	Dimmable	No



SKU	235	236
Color	4000K	3000K



LED CABINET LIGHT			
3.5W PIR Sensor - Slim Fit - Battery			
Charging	USB-C cable 5V	Beam Angle	120°
Battery	3.7V 2200mAh	CRI	Ra>80
Lumens	230lm	IP Rating	IP20
Size	φ80.4x26.3mm	Dimmable	No

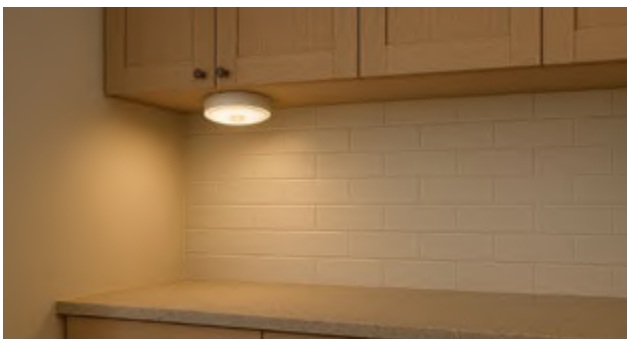

LED CABINET LIGHT			
PIR Sensor - Slim Fit - Battery			
Charging	USB-C cable 5V	Beam Angle	120°
Color	Silver	CRI	Ra>80
Dimmable	No	IP Rating	IP20

SKU	Watt	Lumen	Color	Dimension
230	1.5W	140lm	4000K	300x40x9 mm
231	1.5W	140lm	3000K	300x40x9 mm
232	2.5W	200lm	CCT	400x41x16.5mm



NEW



LED KIDS TOY LIGHTS 2W	
Silicone - Material / USB Charging	
Voltage	5V DC
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Model	Lumen	Battery	Color	Dimension
281	Capibara	30lm	1200mAh	3000K	128x106x124mm
282	Frog	30lm	1200mAh	6000K	124x106x132mm
283	Axolotl	30lm	1200mAh	6000K	147x117x75mm
284	Football	30lm	1200mAh	3000K	115x139x104mm



NEW



LED KIDS TOY LIGHTS 2W	
Silicone - Material / USB Charging	
Voltage	5V DC
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Model	Lumen	Battery	Color	Dimension
285	Flamingo	30lm	1200mAh	6000K	160x99x119mm
286	Enjoy Duck	30lm	1200mAh	3000K	140x113x130mm
287	Unicorn	30lm	1200mAh	3000K	92x131x139mm
288	Dinosaur	30lm	1200mAh	3000K	130x87x138mm

NEW



LED KIDS TOY LIGHTS					
Auto ON/OFF - Day/Night Sensor					
Socket	EU Plug	CRI	Ra>80		
Input Voltage	AC100-240V 50Hz	IP Rating	IP20		
Beam Angle	120°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
276	0.5W	15lm	30lm/W	6000K	ø90x77 mm

NEW



LED KIDS TOY LIGHTS					
Day/Night Sensor					
Socket	EU Plug	CRI	Ra>80		
Input Voltage	AC100-240V 50Hz	IP Rating	IP20		
Beam Angle	120°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
277	0.5W	15lm	30lm/W	6000K	ø75x65 mm

NEW



LED KIDS TOY LIGHTS					
Night Lamp EMOJI-SMILE					
Socket	EU Plug	CRI	Ra>80		
Input Voltage	AC100-240V 50Hz	IP Rating	IP20		
Beam Angle	120°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
279	0.5W	15lm	30lm/W	6000K	ø60x60 mm

NEW



*Batteries not included

LED KIDS TOY LIGHTS					
PIR Sensor - Day/Night - 3xAAA					
Battery	3xAAA	CRI	Ra>80		
Input Voltage	1.5V	IP Rating	IP20		
Beam Angle	120°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
278	0.5W	30lm	60lm/W	6000K	ø80x28 mm



Retro Lamps



PORTABLE RETRO LED LAMP			
2.6W Filament - CCT			
Power	2.6W	Beam Angle	270°
Voltage	DC 3.7V	CRI	Ra>80
Lumens	8-110lm	IP Rating	IP44
Size	132x103mm	Dimmable	Yes
SKU	249	  	
Color	CCT		



PORTABLE RETRO LED LAMP			
3W Filament - CCT			
Power	2.6 W	Beam Angle	270°
Voltage	DC 3.7V	CRI	Ra>80
Lumens	20-160lm	IP Rating	IP44
Size	110x110x180mm	Dimmable	Yes
SKU	250	  	
Color	CCT		



LED FLAME BULB - THREE MODE			
5W SMD E27			
Power	5 W	Beam Angle	2700°
Input Voltage	AC100-240V 50Hz	CRI	Ra>80
Lumens	150lm	Socket	E27
Size	ø47x125mm	Dimmable	No
SKU	222		
Color	1300K		



LED FLAME LAMP			
5W SMD / Battery - LED Flame Bulb Included			
Power	5W	Beam Angle	360°
Input Voltage	AC100-240V 50Hz	CRI	Ra>80
Lumens	250lm	IP Rating	IP20
Size	ø180x285mm	Dimmable	No
SKU	9041	Battery  	
Color	1300K		



LED FLAME LAMP			
Wall Mounted - LED Flame Bulb Included			
Power	5W	Beam Angle	360°
Input Voltage	AC100-240V 50Hz	CRI	Ra>80
Lumens	250lm	IP Rating	IP20
Size	250x347mm	Dimmable	No
SKU	9044		
Color	1300K		



LED FLAME LAMP			
Wall Mounted - LED Flame Bulb Included			
Power	5W	Beam Angle	360°
Input Voltage	AC100-240V 50Hz	CRI	Ra>80
Lumens	250lm	IP Rating	IP20
Size	265x200mm	Dimmable	No
SKU	9045		
Color	1300K		



LED FLAME LAMP			
Hanging - LED Flame Bulb Included			
Power	5W	Beam Angle	360°
Input Voltage	AC100-240V 50Hz	CRI	Ra>80
Lumens	250lm	IP Rating	IP20
Size	ø150x330mm	Dimmable	No
SKU	9043		
Color	1300K		

**LED Tubes and Fixtures**

LED tubes and battens deliver a smart, energy-efficient upgrade to outdated fluorescent systems. Designed for seamless installation, they provide powerful, even illumination while drastically reducing energy consumption and maintenance costs. With a variety of lengths, wattages, and colour temperatures, they adapt perfectly to any environment – whether for everyday home lighting, professional office setups, or demanding industrial spaces.

Features:

- Up to 85% energy savings compared to fluorescent tubes
- Long service life for reduced replacement and maintenance
- Wide choice of colour temperatures to match any space
- Standard sizes to fit existing tube or batten fixtures
- Options for single- or double-end power connection
- Sturdy, high-quality materials with covers in nano-plastic, polycarbonate, or glass

Applications:

- Residential use in kitchens, garages, and basements
- Commercial and retail lighting for offices, shops, and showrooms
- Industrial use in warehouses, factories, and production areas
- Reliable main lighting for corridors, parking areas, and utility spaces



LED TUBE T5 - Plastic	
Matt With Switch	
Input Voltage	220-240V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
5588	3.4W	300lm	88lm/W	6000K	330x20x30mm
5589	3.4W	300lm	88lm/W	4000K	330x20x30mm
5590	3.4W	300lm	88lm/W	3000K	330x20x30mm
5591	6.5W	600lm	92lm/W	6000K	590x20x30mm
5592	6.5W	600lm	92lm/W	4000K	590x20x30mm
5593	6.5W	600lm	92lm/W	3000K	590x20x30mm
5594	9.6W	900lm	94lm/W	6000K	890x20x30mm
5595	9.6W	900lm	94lm/W	4000K	890x20x30mm
5596	9.6W	900lm	94lm/W	3000K	890x20x30mm
5597	13W	1200lm	92lm/W	6000K	1190x20x30mm
5598	13W	1200lm	92lm/W	4000K	1190x20x30mm
5599	13W	1200lm	92lm/W	3000K	1190x20x30mm



LED TUBE T5 - Plastic	
Matt With Switch	
Input Voltage	220-240V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
5567	4W	320lm	80lm/W	2700K	310x28mm
5569	8W	640lm	80lm/W	4000K	570x28mm
5571	12W	960lm	80lm/W	6000K	870x28mm
5572	12W	960lm	80lm/W	4000K	870x28mm
5573	12W	960lm	80lm/W	2700K	870x28mm
5574	16W	1280lm	80lm/W	6000K	1170x28mm
5575	16W	1280lm	80lm/W	4000K	1170x28mm
5576	16W	1280lm	80lm/W	2700K	1170x28mm
5577	20W	1600lm	80lm/W	6000K	1450x28mm
5578	20W	1600lm	80lm/W	4000K	1450x28mm
5579	20W	1600lm	80lm/W	2700K	1450x28mm




LED TUBE T5 - Plastic	
Matt	
Input Voltage	220-240V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
5501	3.4W	300lm	88lm/W	6000K	330x20x30mm
5502	3.4W	300lm	88lm/W	4000K	330x20x30mm
5503	3.4W	300lm	88lm/W	3000K	330x20x30mm
5504	6.5W	600lm	92lm/W	6000K	590x20x30mm
5505	6.5W	600lm	92lm/W	4000K	590x20x30mm
5506	6.5W	600lm	92lm/W	3000K	590x20x30mm
5507	9.6W	900lm	94lm/W	6000K	890x20x30mm
5508	9.6W	900lm	94lm/W	4000K	890x20x30mm
5509	9.6W	900lm	94lm/W	3000K	890x20x30mm
5538	13W	1200lm	92lm/W	6000K	1190x20x30mm
5539	13W	1200lm	92lm/W	4000K	1190x20x30mm
5540	13W	1200lm	92lm/W	3000K	1190x20x30mm




LED TUBE T5 - Plastic	
Matt	
Input Voltage	220-240V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
5550	4W	320lm	80lm/W	6000K	310x28mm
5551	4W	320lm	80lm/W	4000K	310x28mm
5552	4W	320lm	80lm/W	2700K	310x28mm
5554	8W	640lm	80lm/W	4000K	570x28mm
5555	8W	640lm	80lm/W	2700K	570x28mm
5556	12W	960lm	80lm/W	6000K	870x28mm
5557	12W	960lm	80lm/W	4000K	870x28mm
5558	12W	960lm	80lm/W	2700K	870x28mm
5560	16W	1280lm	80lm/W	4000K	1170x28mm
5561	16W	1280lm	80lm/W	2700K	1170x28mm
5562	20W	1600lm	80lm/W	6000K	1450x28mm
5563	20W	1600lm	80lm/W	3000K	1450x28mm
5564	20W	1600lm	80lm/W	2700K	1450x28mm

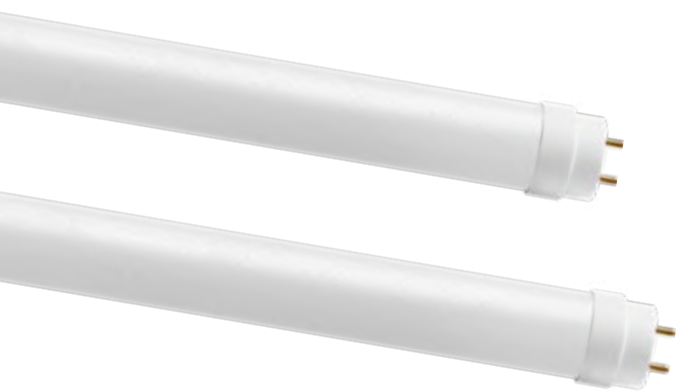

LED TUBE T8 - STARTER	
Nano Plastic - One Side Power	
Input Voltage	220-240V 50/60Hz
Beam Angle	270°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
15541	9W	1260lm	140lm/W	6000K	Φ28x600mm
15542	9W	1260lm	140lm/W	4000K	Φ28x600mm
15544	18W	2520lm	140m/W	6000K	Φ28x1200mm
15545	18W	2520lm	140lm/W	4000K	Φ28x1200mm
15547	22W	3080lm	140lm/W	6000K	Φ28x1500mm
15548	22W	3080lm	140lm/W	4000K	Φ28x1500mm

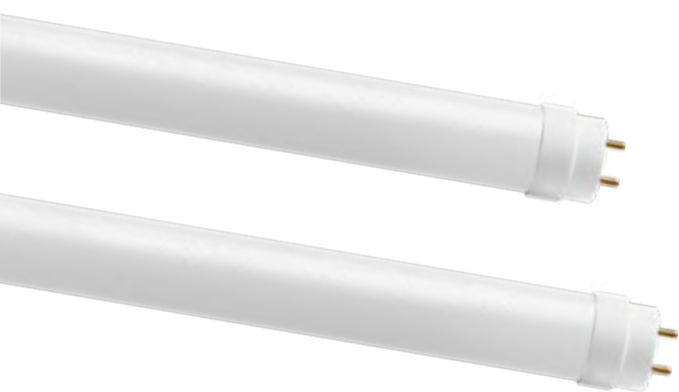

LED TUBE T8 - STARTER	
Nano Plastic - One Side Power	
Input Voltage	220-240V 50/60Hz
Beam Angle	270°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
15511	9W	900lm	100lm/W	6000K	Φ28x600mm
15512	9W	900lm	100lm/W	4000K	Φ28x600mm
15513	9W	900lm	100lm/W	3000K	Φ28x600mm
15514	18W	1800lm	100lm/W	6000K	Φ28x1200mm
15515	18W	1800lm	100lm/W	4000K	Φ28x1200mm
15516	18W	1800lm	100lm/W	3000K	Φ28x1200mm
15517	22W	2400lm	110lm/W	6000K	Φ28x1500mm
15518	22W	2400lm	110lm/W	4000K	Φ28x1500mm
15519	22W	2400lm	110lm/W	3000K	Φ28x1500mm



LED TUBE T8 - GLASS	
City Line - One Side Power	
Input Voltage	175-265V 50/60Hz
Beam Angle	270°
CRI	Ra>80
IP Rating	IP20
Dimmable	No



LED TUBE T8 - GLASS	
CCT - One Side Power	
Input Voltage	220-240V 50/60Hz
Beam Angle	180°
CRI	Ra>80
IP Rating	IP20
Dimmable	No


SKU	Watt	Lumen	Lumen/W	Color	Dimension
5601	9W	900lm	100lm/W	6000K	Φ25x600mm
5602	9W	900lm	100lm/W	4500K	Φ25x600mm
5603	9W	900lm	100lm/W	2800K	Φ25x600mm
5604	18W	1800lm	100lm/W	6000K	Φ25x1200mm
5605	18W	1800lm	100lm/W	4500K	Φ25x1200mm
5606	18W	1800lm	100lm/W	2800K	Φ25x1200mm
5607	22W	2400lm	110lm/W	6000K	Φ25x1500mm
5608	22W	2400lm	110lm/W	4500K	Φ25x1500mm
5609	22W	2400lm	110lm/W	2800K	Φ25x1500mm

SKU	Watt	Lumen	Lumen/W	Colour	Dimension
15601	9W	900lm	100lm/W	CCT	Φ28x600mm
15602	18W	1800lm	100lm/W	CCT	Φ28x1500mm



LED TUBE T8 - GLASS	
One Side Power	
Input Voltage	220-240V 50/60Hz
Beam Angle	270°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
5627	9W	720lm	80lm/W	4000K	Φ25x600mm
5628	22W	1760lm	80lm/W	6000K	Φ25x1500mm

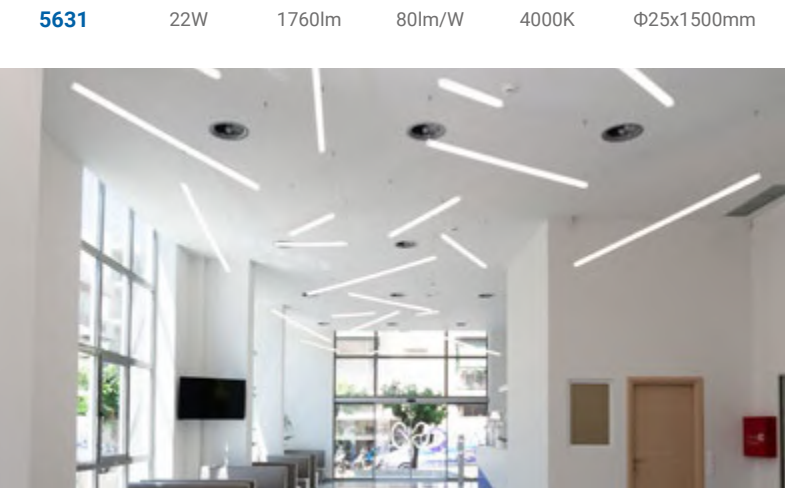

T8 Fixture	
for LED One side power tubes	
Input Voltage	220-240V 50/60Hz
Max Power	100W
Material	Metal+PC
IP Rating	IP20
Dimmable	No

SKU	Socket	Tube Length	Dimension
6745	T8	60cm Tube	606x33mm
6746	T8	120cm Tube	1250x33mm
6749	T8	150cm Tube	1550x33 mm
6747	2xT8	60cm Tube	606x73mm
6748	2xT8	120cm Tube	1250x73mm
6750	2xT8	150cm Tube	1550x73 mm



Stainless Steel Clips

LED WATERPROOF FIXTURE	
For one side power tubes T8	
Input Voltage	220-240V 50/60Hz
Beam Angle	Max 150°
Material	PC+ALU
IP Rating	IP65
Dimmable	No



LED WATERPROOF FIXTURE	
For one side power tubes T8 + Reflector	
Input Voltage	220-240V 50/60Hz
Beam Angle	Max 150°
Material	PC+ALU
IP Rating	IP65
Dimmable	No

SKU	Socket	Tube Length	Dimension
16721	T8	60cm Tube	670x65x65mm
16723	T8	120cm Tube	1280x65x65mm
16725	T8	150cm Tube	1580x65x65mm
16722	2xT8	60cm Tube	670x102x65mm
16724	2xT8	120cm Tube	1280x65x65mm
16726	2xT8	150cm Tube	1580x65x65mm

SKU	Socket	Tube Length	Dimension
6650	T8	60cm Tube	675x90x80mm
6652	T8	120cm Tube	1265x65x65mm
6654	T8	150cm Tube	1565x65x65mm
6651	2xT8	60cm Tube	662x155x100mm
6653	2xT8	120cm Tube	1285x79x99mm
6655	2xT8	150cm Tube	1560x99x79mm



LED FIXTURES WITH T8 TUBES	
Single - City Line - One Side Power	
Input Voltage	220-240V 50/60Hz
Beam Angle	180°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
6731	9W	900lm	100lm/W	6000K	660x75x65mm
6732	9W	900lm	100lm/W	4500K	660x75x65mm
6735	18W	1800lm	100lm/W	6000K	128x67x63 mm
6736	18W	1800lm	100lm/W	4500K	128x67x63 mm
6739	22W	2200lm	100lm/W	6000K	1585x67x63 mm
6740	22W	2200lm	100lm/W	4500K	1585x67x63 mm



LED FIXTURES WITH T8 TUBES	
Double - City Line - One Side Power	
Input Voltage	220-240V 50/60Hz
Beam Angle	180°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
6733	2x9W	1800lm	100lm/W	6000K	680x113x63 mm
6734	2x9W	1800lm	100lm/W	4500K	680x113x63 mm
6737	2x18W	3600lm	100lm/W	6000K	1260x78x100mm
6738	2x18W	3600lm	100lm/W	4500K	1260x78x100mm
6741	2x22W	4000lm	100lm/W	6000K	1585x113x63 mm
6742	2x22W	4000lm	100lm/W	4500K	1585x113x63 mm



LED WATERPROOF FIXTURE	
Linkable	
Input Voltage	220-240V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP65
Dimmable	No



LED WATERPROOF FIXTURE	
Stainless steel clips	
Input Voltage	220-240V 50/60Hz
Beam Angle	180°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
16701	40W	4400lm	110lm/W	6000K	1186x70x60 mm
16702	40W	4400lm	110lm/W	4000K	1186x70x60 mm
16705	40W	4400lm	110lm/W	6000K	1186x70x60 mm
16706	40W	4400lm	110lm/W	4000K	1186x70x60 mm
16709	40W	4400lm	110lm/W	6000K	1186x70x60 mm
16710	40W	4400lm	110lm/W	4000K	1186x70x60 mm
16713	40W	5600lm	140lm/W	6000K	1486x70x60mm
16714	40W	5600lm	140lm/W	4000K	1486x70x60mm
16703	55W	6050lm	110lm/W	6000K	1486x70x60mm
16704	55W	6050lm	110lm/W	4000K	1486x70x60mm
16707	55W	6050lm	110lm/W	6000K	1486x70x60mm
16708	55W	6050lm	110lm/W	4000K	1486x70x60mm
16711	55W	6050lm	110lm/W	6000K	1486x70x60mm
16712	55W	6050lm	110lm/W	4000K	1486x70x60mm



LED WATERPROOF FIXTURE	
Flicker Free with M12 Cable Gland	
Input Voltage	220-240V 50/60Hz
Beam Angle	180°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
6721	18W	1800lm	100lm/W	6000K	650x74x42.5 mm
6722	18W	1800lm	100lm/W	4000K	650x74x42.5 mm
6723	36W	3600lm	100lm/W	6000K	1250x72x43 mm
6724	36W	3600lm	100lm/W	4000K	1250x72x43 mm
6725	45W	4500lm	100lm/W	6000K	1550x72x43 mm
6726	45W	4500lm	100lm/W	4000K	1550x72x43 mm



LED BATTEN LIGHT	
Stainless steel clips - Waterproof	
Input Voltage	220-240V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
6691	20W	1660lm	83lm/W	6000K	600x75x25mm
6692	20W	1660lm	83lm/W	4000K	600x75x25mm
6694	40W	3320lm	83lm/W	6000K	1200x75x25mm
6695	40W	3320lm	83lm/W	4000K	1200x75x25mm
6697	50W	4150lm	83lm/W	6000K	1500x75x25 mm
6698	50W	4150lm	83lm/W	4000K	1500x75x25 mm



LED TRI-PROOF FIXTURE	
Linkable	
Input Voltage	220-240V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
16741	20W	2400lm	120lm/W	6000K	691x61x55mm
16742	20W	2400lm	120lm/W	4000K	691x61x55mm
16743	36W	4320lm	120lm/W	6000K	1241x61x55mm
16744	36W	4320lm	120lm/W	4000K	1241x61x55mm
16745	48W	5760lm	120lm/W	6000K	1541x61x55mm
16746	48W	5760lm	120lm/W	4000K	1541x61x55mm



LED BATTEN LIGHT	
Stainless steel clips	
Input Voltage	220-240V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
6671	10W	1150lm	115lm/W	6000K	300x70x20mm
6672	10W	1150lm	115lm/W	4000K	300x70x20mm
6673	10W	1150lm	115lm/W	3000K	300x70x20mm
6674	20W	2300lm	115lm/W	6000K	600x70x20mm
6675	20W	2300lm	115lm/W	4000K	600x70x20mm
6676	20W	2300lm	115lm/W	3000K	600x70x20mm
6677	40W	5360lm	134lm/W	6000K	1200x70x20mm
6678	40W	5360lm	134lm/W	4000K	1200x70x20mm
6679	40W	5360lm	134lm/W	3000K	1200x70x20mm
6680	45W	6030lm	134lm/W	6000K	1500x70x20mm
6681	45W	6030lm	134lm/W	4000K	1500x70x20mm



LED BATTEN LIGHT	
CCT Light	
Input Voltage	220-240V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
16731	20W	2400lm	120lm/W	CCT	635x71x25mm
16732	40W	4800lm	120lm/W	CCT	1235x71x25mm
16733	45W	5400lm	120lm/W	CCT	1535x71x25mm



LED BATTEN FIXTURE	
Linkable - Waterproof	
Input Voltage	220-240V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
16734	18W	2250lm	125lm/W	6000K	700x43x33mm
16735	18W	2250lm	125lm/W	4000K	700x43x33mm
16736	36W	4500lm	125lm/W	6000K	1250x43x33mm
16737	36W	4500lm	125lm/W	4000K	1250x43x33mm
16738	45W	5625lm	125lm/W	6000K	1550x43x33mm
16739	45W	5625lm	125lm/W	4000K	1550x43x33mm

T5 PLASTIC INPUT CABLE
Double Pin



SKU	30cm	50cm	100cm
	6628	6629	6630

T5 PLASTIC END CAPS
For 5501-5599



SKU	65317
-----	-------





LED Emergency Light

Emergency lighting has become a global standard, ensuring safety and compliance in all types of buildings. OPTONICA LED emergency solutions combine energy efficiency with reliability, providing peace of mind in critical moments. Designed to operate instantly when power fails, they are built to meet the needs of residential, commercial, and industrial environments alike.

Features:

- Up to 85% energy savings compared to conventional systems
- Automatic self-test with clear battery status indication
- Supplied with multiple directional pictograms for flexibility
- Up to 3 hours of dependable emergency operation
- Fast, automatic activation during power outages
- Robust construction for long-lasting reliability

Applications:

- Residential complexes and apartment buildings
- Offices, retail, and commercial spaces
- Warehouses, factories, and industrial sites
- Public buildings such as schools, hospitals, and hotels



EMERGENCY LED EXIT SIGN			
Recessed Fixed			
Power	2W	Lumens	100 lm
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Battery	1.2V 800mAh	IP Rating	IP30
Size	385x85x195 mm	Dimmable	No
SKU	7223		
Color	6000K		



EMERGENCY LED EXIT SIGN			
Wall / Surface Mount			
Power	3W	Lumens	150 lm
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Battery	3.7V 1800mAh	IP Rating	IP30
Size	305x55x202mm	Dimmable	No
SKU	7221		
Color	6000K		



EMERGENCY LED EXIT SIGN			
Recessed Fixed			
Power	3W	Lumens	150 lm
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Battery	3.7V 1800mAh	IP Rating	IP20
Size	370x50x220 mm	Dimmable	No
SKU	7224		
Color	6000K		



EMERGENCY LED EXIT SIGN			
Wall / Surface Mount			
Power	3W	Lumens	180 lm
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Battery	3.7V 1800mAh	IP Rating	IP30
Size	390x60x190 mm	Dimmable	No
SKU	7222		
Color	6000K		



EMERGENCY LED EXIT SIGN			
Wall / Surface Mount			
Power	2W	Battery life	> 3 Hours
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Battery	3.6V 900mAh Ni-Cd	IP Rating	IP20
Size	330x230x40 mm	Dimmable	No
SKU	7203		
Color	6000K		



EMERGENCY LED EXIT SIGN			
Wall / Surface Mount			
Power	2W	Battery life	> 3 Hours
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Battery	3.6V 900mAh Ni-Cd	IP Rating	IP20
Size	300x190 x14mm	Dimmable	No
SKU	7204		
Color	6000K		



EMERGENCY LED EXIT SIGN			
Recessed Fixed			
Power	2W	Battery life	> 3 Hours
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Battery	3.6V 900mAh Ni-Cd	IP Rating	IP20
Size	305x205x76mm	Dimmable	No
SKU	7206		
Color	6000K		



EMERGENCY LED EXIT SIGN			
Recessed Hanging			
Power	2W	Battery life	> 3 Hours
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Battery	3.6V 900mAh Ni-Cd	IP Rating	IP20
Size	306x187x19 mm	Dimmable	No
SKU	7205		
Color	6000K		



EMERGENCY LED EXIT SIGN			
Bulkhead			
Power	5W	Lumens	320 lm
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Battery	3.7V 3600mAh	IP Rating	IP30
Size	350x110x55 mm	Dimmable	No
SKU	7225		
Color	6000K		



EMERGENCY LED EXIT SIGN			
Wall Mount			
Power	3W	Lumens	240 lm
Input Voltage	AC85-240V 50Hz	CRI	Ra>80
Battery	3.7V 2200mAh	IP Rating	IP40
Size	293x55x102mm	Dimmable	No
SKU	7227		
Color	6000K		



EMERGENCY LED EXIT SIGN			
Bulkhead			
Power	5W	Lumens	320 lm
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Battery	3.26V 1500mAh	IP Rating	IP65
Size	350x110x55 mm	Dimmable	No
SKU	7201	7202	
Color	6000K	Recessed kit	



EMERGENCY LED EXIT SIGN			
Wall Mount - Self Test			
Power	3W	Lumens	280 lm
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Battery	3.6V 1800mAh	IP Rating	IP20
Size	285x270x70 mm	Dimmable	No
SKU	7208		
Color	6000K		



EMERGENCY LED EXIT SIGN			
Wall Mount			
Power	3W	Lumens	140 lm
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Battery	3.6V 1200mAh	IP Rating	IP20
Size	370x180x25 mm	Dimmable	No
SKU	7207		
Color	6000K		



EMERGENCY LED EXIT SIGN			
Wall Mount - Self Test			
Power	6W	Lumens	450 lm
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Battery	3.6V 3000mAh	IP Rating	IP20
Size	280x260x60 mm	Dimmable	No
SKU	7209		
Color	6000K		



EMERGENCY LED EXIT SIGN			
Wall Mount			
Power	3W	Lumens	280 lm
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Battery	3.7V 1200mAh	IP Rating	IP20
Size	202x55x30 mm	Dimmable	No
SKU	7226		
Color	6000K		



EMERGENCY LED EXIT SIGN			
Downlight			
Power	3W	CRI	Ra>80
Input Voltage	AC220-240V 50Hz	IP Rating	IP20
Size	200x95x50mm	Dimmable	No
Battery	3.2V 1800mAh	4.8V 1800mAh	
Lumens	120 lm	200 lm	
SKU	7210	7211	
Color	6000K	Osram Chip	



LED Panels

LED panels provide versatile lighting solutions for both residential and professional spaces. Available in a wide range of standard sizes, they can be seamlessly integrated into suspended ceilings or installed as stylish hanging lights. With their sleek design and powerful illumination, they combine modern efficiency with a clean, contemporary look.

Features:

- Up to 80% energy savings compared to conventional lighting
- Flexible installation – recessed, surface-mounted, or suspended
- Multiple colour temperature options (warm, neutral, cool)
- Choice of glossy or matte finishes
- Standardized sizes for easy replacement or new projects
- Wide range of wattages to match different needs

Applications:

- Suspended ceilings in offices, schools, and public buildings
- Modern home interiors – kitchens, living rooms, or hallways
- Commercial spaces such as shops, showrooms, and restaurants
- Large indoor areas requiring uniform, glare-free lighting



Standard German



LED PANELS - 1 Pcs Box

62x62cm - German Standard

Input Voltage	AC175-265V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
2701	36W	3600lm	100lm/W	6000K	620x620x9mm
2702	36W	3600lm	100lm/W	4500K	620x620x9mm
2703	36W	3600lm	100lm/W	2700K	620x620x9mm
2704	36W	3600lm	100lm/W	6000K	620x620x9mm
2705	36W	3600lm	100lm/W	4500K	620x620x9mm
2706	36W	3600lm	100lm/W	2700K	620x620x9mm
2707	36W	3600lm	100lm/W	6000K	620x620x9mm
2708	36W	3600lm	100lm/W	4500K	620x620x9mm
2709	36W	3600lm	100lm/W	2700K	620x620x9mm



LED PANELS - 6 Pcs Box

30x120cm

Input Voltage	AC175-265V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
2714	36W	3600lm	100lm/W	6000K	1195x295x10mm
2715	36W	3600lm	100lm/W	4500K	1195x295x10mm
2716	36W	3600lm	100lm/W	2700K	1195x295x10mm
2731	36W	3600lm	100lm/W	6000K	1195x295x10mm
2732	36W	3600lm	100lm/W	4500K	1195x295x10mm
2733	36W	3600lm	100lm/W	2700K	1195x295x10mm



LED PANELS - 6 Pcs Box

60x60cm

Input Voltage	AC175-265V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
2711	36W	3600lm	100lm/W	6000K	595x595x9mm
2712	36W	3600lm	100lm/W	4500K	595x595x9mm
2713	36W	3600lm	100lm/W	2700K	595x595x9mm
2729	36W	3600lm	100lm/W	6000K	595x595x9mm
2730	36W	3600lm	100lm/W	4500K	595x595x9mm
2396	45W	3600lm	80lm/W	2700K	595x595x9mm
2717	36W	3600lm	100lm/W	6000K	595x595x9mm
2718	36W	3600lm	100lm/W	4500K	595x595x9mm
2719	36W	3600lm	100lm/W	2700K	595x595x9mm



LED FRAME PANELS - 2 Pcs Box


60x60cm

Input Voltage	AC220-240V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
2746	36W	3600lm	100lm/W	6000K	595x595x9mm
2747	36W	3600lm	100lm/W	4500K	595x595x9mm
2748	48W	4800lm	100lm/W	6000K	595x595x15mm
2749	48W	4800lm	100lm/W	4500K	595x595x15mm

LED SPLICING FRAME PANEL - 1 Pcs Slim Box

Extremely easy to transport





LED PANELS UGR<19	
62x62cm	
Input Voltage	AC175-265V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
2791	45W	3600lm	80lm/W	6000K	620x620x9mm
2792	45W	3600lm	80lm/W	4500K	620x620x9mm

2793	45W	3600lm	80lm/W	2700K	620x620x9mm
------	-----	--------	--------	-------	-------------

2795	45W	3600lm	80lm/W	4500K	620x620x9mm
------	-----	--------	--------	-------	-------------

2796	45W	3600lm	80lm/W	2700K	620x620x9mm
------	-----	--------	--------	-------	-------------



LED PANELS CRI>95	
62x62cm	
Input Voltage	AC175-265V 50/60Hz
Beam Angle	120°
CRI	Ra>95
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
2788	45W	3600lm	80lm/W	6000K	620x620x9mm
2789	45W	3600lm	80lm/W	4500K	620x620x9mm

2790	45W	3600lm	80lm/W	2700K	620x620x9mm
------	-----	--------	--------	-------	-------------

2797	45W	3600lm	80lm/W	6000K	620x620x9mm
------	-----	--------	--------	-------	-------------

2798	45W	3600lm	80lm/W	4500K	620x620x9mm
------	-----	--------	--------	-------	-------------

2799	45W	3600lm	80lm/W	2700K	620x620x9mm
------	-----	--------	--------	-------	-------------



LED PANELS CLOUD OPTIC - 4 Pcs Box			
60x60cm			
Carton Box	4Pcs	CRI	Ra>80
Input Voltage	AC220-240V 50Hz	IP Rating	IP20
Beam Angle	120°	Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
2780	45W	4500lm	100lm/W	6000K	595x595x9mm



LED PANELS HIGH LUMEN			
60x60cm			
Carton Box	6Pcs	CRI	Ra>80
Input Voltage	AC220-240V 50Hz	IP Rating	IP20
Beam Angle	120°	Dimmable	No


SKU	Watt	Lumen	Lumen/W	Color	Dimension
2389	29W	3915lm	135lm/W	4500K	595x595x40mm



LED BACKLIT PANELS			
30x120cm			
Carton Box	1Pcs	CRI	Ra>80
Input Voltage	AC175-265V 50Hz	IP Rating	IP20
Beam Angle	120°	Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
2385	45W	3600lm	80lm/W	6000K	1195x295x10mm
2387	45W	3600lm	80lm/W	2700K	1195x295x10mm
2377	45W	4500lm	100lm/W	2700K	1195x295x10mm



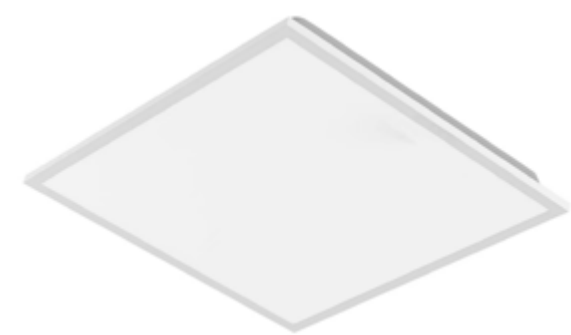

LED BACKLIT PANELS - 10 Pcs Box					
60x60cm - 3CCT					
Carton Box	10Pcs	CRI		Ra>80	
Input Voltage	AC220-240V 50Hz	IP Rating		IP20	
Beam Angle	120°	Dimmable		No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
12779	36W	4320lm	120lm/W	CCT	595x595x33mm



LED BACKLIT PANELS - 10 Pcs Box					
60x60cm - UGR<19					
Carton Box	10Pcs	CRI		Ra>80	
Input Voltage	AC220-240V 50Hz	IP Rating		IP20	
Beam Angle	120°	Dimmable		No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
12777	36W	4320lm	120lm/W	6000K	595x595x34mm
12778	36W	4320lm	120lm/W	4000K	595x595x34mm



LED BACKLIT PANELS - 6 Pcs Box					
60x60cm - TP(a) rated glare control diffuser					
Carton Box	6Pcs	CRI		Ra>80	
Input Voltage	AC220-240V 50Hz	IP Rating		IP20	
Beam Angle	120°	Dimmable		No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
2776	30W	3600lm	120lm/W	6000K	595x595x34mm
2777	30W	3600lm	120lm/W	4000K	595x595x34mm



LED BACKLIT PANELS - 10 Pcs Box					
60x60cm					
Carton Box	10Pcs	CRI		Ra>80	
Input Voltage	AC220-240V 50Hz	IP Rating		IP20	
Beam Angle	120°	Dimmable		No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
12771	36W	4320lm	120lm/W	6000K	595x595x36mm
12772	36W	4320lm	120lm/W	4500K	595x595x36mm
12773	36W	4320lm	120lm/W	2700K	595x595x36mm



LED BACKLIT PANELS - 10 Pcs Box					
60x60cm					
Carton Box	10Pcs	CRI		Ra>80	
Input Voltage	AC220-240V 50Hz	IP Rating		IP20	
Beam Angle	120°	Dimmable		No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
2772	40W	3400lm	85lm/W	6000K	595x595x34mm
2773	40W	3400lm	85lm/W	4000K	595x595x34mm



LED BACKLIT PANELS - 10 Pcs Box					
60x60cm					
Carton Box	10Pcs	CRI		Ra>80	
Input Voltage	AC185-265V 50Hz	IP Rating		IP20	
Beam Angle	120°	Dimmable		No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
2770	25W	4000lm	160lm/W	6000K	595x595x34mm
2771	25W	4000lm	160lm/W	4500K	595x595x34mm




LED BACKLIT PANELS - 6 Pcs Box					
120x30cm					
Carton Box	6Pcs	CRI		Ra>80	
Input Voltage	AC220-240V 50Hz	IP Rating		IP20	
Beam Angle	120°	Dimmable		No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
12774	36W	4320lm	120lm/W	6000K	1195x295x34mm
12775	36W	4320lm	120lm/W	4500K	1195x295x34mm
12776	36W	4320lm	120lm/W	2700K	1195x295x34mm



LED BACKLIT PANELS - 10 Pcs Box					
60x60cm - High Lumen					
Carton Box	10Pcs	CRI		Ra>80	
Input Voltage	AC220-240V 50Hz	IP Rating		IP20	
Beam Angle	120°	Dimmable		No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
12781	30W	4200lm	140lm/W	6000K	595x595x34mm
12782	30W	4200lm	140lm/W	4000K	595x595x34mm
12780	30W	4200lm	140lm/W	3CCT	595x595x33mm



LED SURFACE/BACKLIT PANELS					
120x30cm					
Carton Box	4Pcs	CRI		Ra>80	
Input Voltage	AC220-240V 50Hz	IP Rating		IP20	
Beam Angle	120°	Dimmable		No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
2786	40W	3600lm	90lm/W	6000K	1200x300x40mm
2787	40W	3600lm	90lm/W	4000K	1200x300x40mm

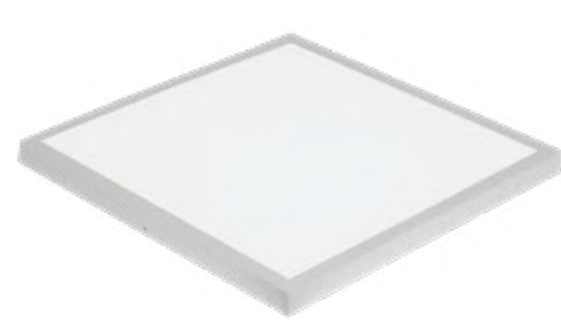

LED SURFACE/BACKLIT PANELS					
60x60cm					
Carton Box	4Pcs	CRI		Ra>80	
Input Voltage	AC220-240V 50Hz	IP Rating		IP20	
Beam Angle	120°	Dimmable		No	
SKU	Watt	Lumen	Lumen/W	Colour	Dimension
2784	40W	3600lm	90lm/W	6000K	595x595x40mm
2785	40W	3600lm	90lm/W	4000K	595x595x40mm



LED PANELS					
PREMIUM LINE					
60x60cm					
Carton Box	6Pcs	CRI		Ra>80	
Input Voltage	AC175-265V 50Hz	IP Rating		IP20	
Beam Angle	120°	Dimmable		No	
SKU	Watt	Lumen	Lumen/W	Color	Dimension
2726	40W	4800lm	120lm/W	6000K	595x595x15 mm
2727	40W	4800lm	120lm/W	4000K	595x595x15 mm
2728	40W	4800lm	120lm/W	2800K	595x595x15 mm



EMERGENCY BATTERY PACK			
For LED Panels			
Battery	3.6V / 4.5Ah	Instant On	0.1s
Input Voltage	AC220-240V 50Hz	Material	Plastic
Size	213x95x45mm	Emergency Duration	3 Hours
SKU	6029		
Color	White		



LED PANEL DRIVER	
Plastic	
Input Voltage	180-265V 50/60Hz
Material	Plastic
IP Rating	IP20
Dimmable	No



SKU	Watt	Output Voltage	Current	Dimension
6043	36W	DC: 30-40V	900mA	140x45x30mm
6019	36W	DC: 38-42V	900mA	140x45x30mm
6021	45W	DC: 38-42V	950mA	140x45x30 mm
6022	48W	DC: 36-56V	750mA	140x45x30 mm
6031	25W	DC: 30-42V	600mA	140x45x30 mm
6032	36W	DC: 30-42V	900mA	140x45x30 mm
6044	36W	DC: 27-40V	1000mA	140x45x30mm
6028	45W	DC: 30-45V	1000mA	140x45x30mm



DRIVERS FOR LED DOWNLIGHTS	
Plastic Case	
Input Voltage	85-265V 50/60Hz
Material	Plastic
IP Rating	IP20
Dimmable	No

SKU	Watt	Output Voltage	Current	Dimension
6035	3W	DC: 3-12V	250mA	35x60mm
6036	6W	DC: 15-24V	250mA	35x60mm
6037	12W	DC: 20-40V	300mA	35x60mm
6038	18W	DC: 40-60V	300mA	35x60mm
6039	24W	DC: 60-80V	300mA	35x60mm



FRAMES FOR LED PANELS	
Aluminium / Plastic	

SKU	Aluminium	Aluminium	Aluminium	Alu+Plastic	Alu+Plastic
5199	625x625mm	600x600mm	300x1200mm	600x600mm	300x1200mm
5198					
5197					
15198					
15197					



ACCESSORIES FOR HANGING	
Aluminium	

SKU	5182	5188
Dimension	Stainless Steel Rope	Clips for LED Panels



LED DALI DRIVER FOR LED PANELS			
Adjustable			
Power	20W-40W	Output Current	550-1050mA
Input Voltage	AC220-240V 50Hz	Output Voltage	24V-42V
Size	106x70x45mm	Matrial	Plastic
SKU	6030		
Color	White		

**LED Surface and Mini Panels**

LED surface panels provide maximum flexibility in lighting design, allowing easy installation on any hard surface without limitations. Combining modern efficiency with a sleek look, they deliver bright, uniform light while saving energy and reducing maintenance costs. Suitable for both functional and decorative use, they adapt seamlessly to a wide range of indoor environments.

Features:

- Up to 80% lower energy consumption compared to traditional lighting
- Available in multiple colour temperatures (warm, neutral, cool)
- Choice of glossy or matte finishes for different aesthetics
- Offered in standard sizes for easy replacement or new projects
- Wide power range to suit rooms of any scale
- Slim, durable construction with modern design

Applications:

- Homes and apartments
- Offices, shops, and retail spaces
- Hospitals, clinics, and schools
- Restaurants, hotels, and hospitality areas
- Indoor parking, corridors, and utility areas
- Industrial and manufacturing spaces



LED SURFACE PANELS	
CCT Light	
Input Voltage	85-260V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

	SKU	Watt	Lumen	Lumen/W	Color	Dimension
Round	12911	6W	420lm	70lm/W	CCT	Φ110x24mm
	12912	12W	840lm	70lm/W	CCT	Φ160x24mm
	12913	18W	1260lm	70lm/W	CCT	Φ210x24mm
	12914	24W	1680lm	70lm/W	CCT	Φ285x24mm
Square	12915	6W	420lm	70lm/W	CCT	110x110x24mm
	12916	12W	840lm	70lm/W	CCT	159x159x24mm
	12917	18W	1260lm	70lm/W	CCT	209x209x24mm
	12918	24W	1680lm	70lm/W	CCT	283x283x24mm



LED CEILING LIGHT	
3CCT - Front and Back Light - Plastic	
Input Voltage	220-240V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

	SKU	Watt	Lumen	Lumen/W	Color	Dimension
Black	Front / Back					
	2938	12W / 4W	1600lm	100lm/W	3CCT	Φ246x47mm
	2939	18W / 6W	2400lm	100lm/W	3CCT	Φ296x49mm
	2940	24W / 8W	3200lm	100lm/W	3CCT	Φ396x59mm
White	Front / Back					
	2935	12W / 4W	1600lm	100lm/W	3CCT	Φ246x47mm
	2936	18W / 6W	2400lm	100lm/W	3CCT	Φ296x49mm
	2937	25W / 8W	3200lm	100lm/W	3CCT	Φ396x59mm



LED SURFACE PANELS	
CCT Light	
Input Voltage	85-260V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

	SKU	Watt	Lumen	Lumen/W	Color	Dimension
Round	12929	6W	420lm	70lm/W	CCT	Φ110x24mm
	12930	12W	840lm	70lm/W	CCT	Φ160x24mm
	12931	18W	1260lm	70lm/W	CCT	Φ193x24mm
	12932	24W	1680lm	70lm/W	CCT	Φ265x24mm
Square	12933	6W	420lm	70lm/W	CCT	110x110x24mm
	12934	12W	840lm	70lm/W	CCT	159x159x24mm
	12935	18W	1260lm	70lm/W	CCT	209x209x24mm
	12936	24W	1680lm	70lm/W	CCT	265x283x24mm



LED MULTI-FIT PANELS	
Power - Selectable / CCT Light	
Input Voltage	220-240V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

	SKU	Watt	Lumen	Lumen/W	Color	Dimension
Black	2598	10W-18W	1000-1800W	100lm/W	CCT	Φ220x18mm
	2599	10W-18W	1000-1800W	PIR sensor	CCT	Φ220x18mm
White	2588	10-18W	1000-1800W	100lm/W	CCT	Φ220x18mm
	2589	10-18W	1000-1800W	PIR sensor	CCT	Φ220x18mm



LED SURFACE PANELS	
Round - White Body	
Input Voltage	180-260V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
2231	6W	480lm	80lm/W	6000K	Φ120x31mm
2243	6W	480lm	80lm/W	4500K	Φ120x31mm
2232	6W	480lm	80lm/W	2800K	Φ120x31mm
2244	12W	960lm	80lm/W	6000K	Φ172x31mm
2245	12W	960lm	80lm/W	4500K	Φ172x31mm
2246	12W	960lm	80lm/W	2800K	Φ172x31mm
2235	18W	1440lm	80lm/W	6000K	Φ220x31mm
2247	18W	1440lm	80lm/W	4500K	Φ220x31mm
2236	18W	1440lm	80lm/W	2800K	Φ220x31mm
2248	24W	1920lm	80lm/W	6000K	Φ300x31mm
2249	24W	1920lm	80lm/W	4500K	Φ300x31mm
2250	24W	1920lm	80lm/W	2800K	Φ300x31mm



LED SURFACE PANELS	
Round - Home Edition	
Input Voltage	85-260V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
2401	6W	480lm	80lm/W	6000K	Φ120x38mm
2402	6W	480lm	80lm/W	4500K	Φ120x38mm
2403	6W	480lm	80lm/W	2800K	Φ120x38mm
2404	12W	960lm	80lm/W	6000K	Φ160x38mm
2405	12W	960lm	80lm/W	4500K	Φ160x38mm
2406	12W	960lm	80lm/W	2800K	Φ160x38mm
2407	18W	1440lm	80lm/W	6000K	Φ220x38mm
2408	18W	1440lm	80lm/W	4500K	Φ220x38mm
2409	18W	1440lm	80lm/W	2800K	Φ220x38mm
2410	24W	1920lm	80lm/W	6000K	Φ300x39mm
2411	24W	1920lm	80lm/W	4500K	Φ300x39mm
2412	24W	1920lm	80lm/W	2800K	Φ300x39mm



LED SURFACE PANELS	
Square - White Body	
Input Voltage	180-260V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
2237	6W	480lm	80lm/W	6000K	120x120x38mm
2251	6W	480lm	80lm/W	4500K	120x120x38mm
2238	6W	480lm	80lm/W	2800K	120x120x38mm
2252	12W	960lm	80lm/W	6000K	167x167x38mm
2253	12W	960lm	80lm/W	4500K	167x167x38mm
2254	12W	960lm	80lm/W	2800K	167x167x38mm
2241	18W	1440lm	80lm/W	6000K	220x220x38mm
2255	18W	1440lm	80lm/W	4500K	220x220x38mm
2242	18W	1440lm	80lm/W	2800K	220x220x38mm
2256	24W	1920lm	80lm/W	6000K	300x300x39mm
2257	24W	1920lm	80lm/W	4500K	300x300x39mm
2258	24W	1920lm	80lm/W	2800K	300x300x39mm



LED SURFACE PANELS	
Square - Home Edition	
Input Voltage	85-260V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
2413	6W	480lm	80lm/W	6000K	120x120x38mm
2414	6W	480lm	80lm/W	4500K	120x120x38mm
2415	6W	480lm	80lm/W	2800K	120x120x38mm
2416	12W	960lm	80lm/W	6000K	167x167x38mm
2417	12W	960lm	80lm/W	4500K	167x167x38mm
2418	12W	960lm	80lm/W	2800K	167x167x38mm
2419	18W	1440lm	80lm/W	6000K	220x220x38mm
2420	18W	1440lm	80lm/W	4500K	220x220x38mm
2421	18W	1440lm	80lm/W	2800K	220x220x38mm
2422	24W	1920lm	80lm/W	6000K	300x300x39mm
2423	24W	1920lm	80lm/W	4500K	300x300x39mm
2424	24W	1920lm	80lm/W	2800K	300x300x39mm



LED BACKLIT SURFACE PANELS	
Round - Home Edition - DOB Driver	
Input Voltage	85-260V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
2975	6W	360lm	60lm/W	6000K	Φ120x32mm
2976	6W	360lm	60lm/W	4500K	Φ120x32mm
2977	6W	360lm	60lm/W	2700K	Φ120x32mm
2978	12W	840lm	70lm/W	6000K	Φ160x28mm
2979	12W	840lm	70lm/W	4500K	Φ160x28mm
2980	12W	840lm	70lm/W	2700K	Φ160x28mm
2981	18W	1350lm	75lm/W	6000K	Φ210x28mm
2982	18W	1350lm	75lm/W	4500K	Φ210x28mm
2983	18W	1350lm	75lm/W	2700K	Φ210x28mm
2984	24W	1920lm	80lm/W	6000K	Φ280x29mm
2985	24W	1920lm	80lm/W	4500K	Φ280x29mm
2986	24W	1920lm	80lm/W	2700K	Φ280x29mm



LED SURFACE PANELS	
CCT Light	
Input Voltage	165-260V 50/60Hz
Beam Angle	100°
CRI	Ra>80
IP Rating	IP44
Dimmable	No

	SKU	Watt	Lumen	Lumen/W	Color	Dimension
Round	2535	6W	450lm	75lm/W	CCT	Φ122x35mm
	2536	12W	950lm	80lm/W	CCT	Φ177x35mm
	2537	18W	1450lm	80lm/W	CCT	Φ226x35mm
	2538	24W	2565lm	107lm/W	CCT	Φ245x35mm
Square	2539	6W	450lm	75lm/W	CCT	122x122x35mm
	2540	12W	950lm	80lm/W	CCT	172x172x35mm
	2541	18W	1450lm	80lm/W	CCT	227x227x35mm
	2542	24W	2565lm	107lm/W	CCT	240x240x35mm



LED BACKLIT SURFACE PANELS	
Square - Home Edition - DOB Driver	
Input Voltage	85-265V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
2987	6W	360lm	60lm/W	6000K	120x120x32mm
2988	6W	360lm	60lm/W	4500K	120x120x32mm
2989	6W	360lm	60lm/W	2700K	120x120x32mm
2990	12W	840lm	70lm/W	6000K	160x160x28mm
2991	12W	840lm	70lm/W	4500K	160x160x28mm
2992	12W	840lm	70lm/W	2700K	160x160x28mm
2993	18W	1350lm	75lm/W	6000K	210x210x28mm
2994	18W	1350lm	75lm/W	4500K	210x210x28mm
2995	18W	1350lm	75lm/W	2700K	210x210x28mm
2996	24W	1920lm	80lm/W	6000K	280x280x29mm
2997	24W	1920lm	80lm/W	4500K	280x280x29mm
2998	24W	1920lm	80lm/W	2700K	280x280x29mm



LED SURFACE PANELS	
CCT Light	
Input Voltage	165-260V 50/60Hz
Beam Angle	100°
CRI	Ra>80
IP Rating	IP44
Dimmable	No

	SKU	Watt	Lumen	Lumen/W	Color	Dimension
Round	2590	6W	450lm	75lm/W	CCT	Φ115x32mm
	2591	12W	950lm	80lm/W	CCT	Φ170x32mm
	2592	18W	1450lm	80lm/W	CCT	Φ220x32mm
	2593	24W	2150lm	90lm/W	CCT	Φ240x32mm
Square	2594	6W	450lm	75lm/W	CCT	115x115x32mm
	2595	12W	950lm	80lm/W	CCT	165x165x32mm
	2596	18W	1450lm	80lm/W	CCT	220x220x32mm
	2597	24W	2150lm	90lm/W	CCT	224x224x32mm

NEW



LED BUILT-IN SLIM MODULE	
3CCT Light -Isolate driver	
Input Voltage	85-265V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

	SKU	Watt	Lumen	Cut Size	Color	Dimension
Round	12941	3W	270lm	φ75mm	3CCT	φ83*16mm
	12942	6W	540lm	φ105mm	3CCT	φ118x16mm
	12943	12W	1080lm	φ150mm	3CCT	φ168x16mm
	12944	18W	1620lm	φ200mm	3CCT	φ220x16mm
	12945	24W	2160lm	φ275mm	3CCT	φ297x16mm
Square	12951	3W	270lm	75x75mm	3CCT	84x84x16mm
	12952	6W	540lm	105x105mm	3CCT	117x117x16mm
	12953	12W	1080lm	150x150mm	3CCT	166x166x16mm
	12954	18W	1620lm	200x200mm	3CCT	219x219x16mm
	12955	24W	2160lm	275x275mm	3CCT	291x291x16mm

NEW



LED BUILT-IN MODULE	
CCT Light - Driver on board	
Input Voltage	220-240V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

	SKU	Watt	Lumen	Cut Size	Color	Dimension
White	12961	6W	540lm	Φ80mm	3CCT	Φ90x30mm
	12962	12W	1080lm	Φ125mm	3CCT	Φ140x30mm
	12963	18W	1620lm	Φ145mm	3CCT	Φ165x30mm
	12964	24W	2160lm	Φ195mm	3CCT	Φ215x30mm
Black	12965	6W	420lm	Φ80mm	3CCT	Φ90x30mm
	12966	12W	840lm	Φ125mm	3CCT	Φ140x30mm
	12967	18W	1260lm	Φ145mm	3CCT	Φ165x30mm
	12968	24W	1680lm	Φ195mm	3CCT	Φ215x30mm

NEW



LED BUILT-IN SLIM MODULE	
3CCT Light -Isolate driver	
Input Voltage	85-265V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

	SKU	Watt	Lumen	Cut Size	Color	Dimension
Round	12946	3W	270lm	φ75mm	3CCT	φ83x16mm
	12947	6W	540lm	Φ105mm	3CCT	φ119x14mm
	12948	12W	1080lm	Φ150mm	3CCT	φ168x14mm
	12949	18W	1620lm	Φ200mm	3CCT	φ220x14mm
	12950	24W	2160lm	Φ275mm	3CCT	φ295x14mm
Square	12956	3W	270lm	75x75mm	3CCT	84x84x16mm
	12957	6W	540lm	105x105mm	3CCT	117x117x16mm
	12958	12W	1080lm	150x150mm	3CCT	166x166x16mm
	12959	18W	1620lm	200x200mm	3CCT	219x219x16mm
	12960	24W	2160lm	275x275mm	3CCT	291x291x16mm



LED FRAMELESS MINI PANELS	
CCT Light	
Input Voltage	220-240V 50/60Hz
Beam Angle	180°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
12601	9W	900lm	100lm/W	CCT	Φ100x21mm
					Multifit Cut Size : : Φ46-78mm
12602	18W	1800lm	100lm/W	CCT	Φ119x21mm
					Multifit Cut Size : : Φ46-98mm
12603	24W	2400lm	100lm/W	CCT	Φ170x21mm
					Multifit Cut Size : : Φ46-143mm
12604	36W	3600lm	100lm/W	CCT	Φ225x21mm
					Multifit Cut Size : : Φ46-200mm



LED BUILT-IN MODULE	
Round - with Driver	
Input Voltage	85-260V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Cut Size	Color	Dimension
2431	3W	150lm	Φ65mm	6000K	Φ88x19mm
2432	3W	150lm	Φ65mm	4500K	Φ88x19mm
2433	3W	150lm	Φ65mm	2800K	Φ88x19mm
2434	6W	360lm	Φ100mm	6000K	Φ118x19mm
2435	6W	360lm	Φ100mm	4500K	Φ118x19mm
2436	6W	360lm	Φ100mm	2800K	Φ118x19mm
2437	12W	840lm	Φ150mm	6000K	Φ170x19mm
2438	12W	840lm	Φ150mm	4500K	Φ170x19mm
2439	12W	840lm	Φ150mm	2800K	Φ170x19mm
2335	18W	1350lm	Φ200mm	6000K	Φ225x19mm
2440	18W	1350lm	Φ200mm	4500K	Φ225x19mm
2336	18W	1350lm	Φ200mm	2800K	Φ225x19mm
2441	24W	1700lm	Φ250mm	6000K	Φ300x19mm
2442	24W	1700lm	Φ250mm	4500K	Φ300x19mm
2443	24W	1700lm	Φ250mm	2800K	Φ300x19mm



LED BUILT-IN MODULE	
Round - Home Edition	
Input Voltage	175-260V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Cut Size	Color	Dimension
2470	3W	150lm	Φ65mm	6000K	Φ83x14mm
2471	3W	150lm	Φ65mm	4500K	Φ83x14mm
2472	3W	150lm	Φ65mm	2800K	Φ83x14mm
2473	6W	360lm	Φ100mm	6000K	Φ118x19mm
2474	6W	360lm	Φ100mm	4500K	Φ118x19mm
2475	6W	360lm	Φ100mm	2800K	Φ118x19mm
2476	12W	840lm	Φ150mm	6000K	Φ170x23mm
2477	12W	840lm	Φ150mm	4500K	Φ170x23mm
2478	12W	840lm	Φ150mm	2800K	Φ170x23mm
2479	18W	1350lm	Φ200mm	6000K	Φ225x23mm
2480	18W	1350lm	Φ200mm	4500K	Φ225x23mm
2481	18W	1350lm	Φ200mm	2800K	Φ225x23mm
2482	24W	1700lm	Φ250mm	6000K	Φ297x15mm
2483	24W	1700lm	Φ250mm	4500K	Φ297x15mm
2484	24W	1700lm	Φ250mm	2800K	Φ297x15mm



LED BUILT-IN MODULE	
Square - with Driver	
Input Voltage	85-260V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Sut Size	Color	Dimension
2444	3W	150lm	70x70mm	6000K	85x85x19mm
2445	3W	150lm	70x70mm	4500K	85x85x19mm
2446	3W	150lm	70x70mm	2800K	85x85x19mm
2447	6W	360lm	100x100mm	6000K	120x120x22mm
2448	6W	360lm	100x100mm	4500K	120x120x22mm
2449	6W	360lm	100x100mm	2800K	120x120x22mm
2450	12W	840lm	150x150mm	6000K	166x166x19mm
2451	12W	840lm	150x150mm	4500K	166x166x19mm
2452	12W	840lm	150x150mm	2800K	166x166x19mm
2348	18W	1350lm	200x200mm	6000K	225x225x20mm
2453	18W	1350lm	200x200mm	4500K	225x225x20mm
2349	18W	1350lm	200x200mm	2800K	225x225x20mm
2454	24W	1700lm	250x250mm	6000K	293x293x25mm
2455	24W	1700lm	250x250mm	4500K	293x293x25mm
2456	24W	1700lm	250x250mm	2800K	293x293x25mm



LED BUILT-IN MODULE	
Square - Home Edition	
Input Voltage	85-260V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
2485	3W	150lm	70x70mm	6000K	85x85x19mm
2486	3W	150lm	70x70mm	4500K	85x85x19mm
2487	3W	150lm	70x70mm	2800K	85x85x19mm
2488	6W	360lm	100x100mm	6000K	119x119x20mm
2489	6W	360lm	100x100mm	4500K	119x119x20mm
2490	6W	360lm	100x100mm	2800K	119x119x20mm
2491	12W	840lm	150x150mm	6000K	166x166x19mm
2492	12W	840lm	150x150mm	4500K	166x166x19mm
2493	12W	840lm	150x150mm	2800K	166x166x19mm
2494	18W	1350lm	200x200mm	6000K	219x219x19mm
2496	18W	1350lm	200x200mm	4500K	219x219x19mm
2495	18W	1350lm	200x200mm	2800K	219x219x19mm
2497	24W	1700lm	250x250mm	6000K	297x297x19mm
2498	24W	1700lm	250x250mm	4500K	297x297x19mm
2499	24W	1700lm	250x250mm	2800K	297x297x19mm



LED BACKLIT BUILT-IN MODULE	
Round - Home Edition - DOB Driver	
Input Voltage	85-260V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
2951	6W	360lm	60lm/W	6000K	Φ120x24mm
2952	6W	360lm	60lm/W	4500K	Φ120x24mm
2953	6W	360lm	60lm/W	2700K	Φ120x24mm
2954	12W	840lm	70lm/W	6000K	Φ170x24mm
2955	12W	840lm	70lm/W	4500K	Φ170x24mm
2956	12W	840lm	70lm/W	2700K	Φ170x24mm
2957	18W	1350lm	75lm/W	6000K	Φ225x24mm
2958	18W	1350lm	75lm/W	4500K	Φ225x24mm
2959	18W	1350lm	75lm/W	2700K	Φ225x24mm
2960	24W	1920lm	80lm/W	6000K	Φ300x27mm
2961	24W	1920lm	80lm/W	4500K	Φ300x27mm
2962	24W	1920lm	80lm/W	2700K	Φ300x27mm



SKU	Surface Adapter Kit For
5003	Compatable with SKU: 2581; 2582
5004	Compatable with SKU: 2583
5005	Compatable with SKU: 2584
5006	Compatable with SKU: 2585

LED BUILT-IN / SURFACE MODULE	
CCT Light - Dimmable	
Input Voltage	220-240V 50/60Hz
Beam Angle	100°
CRI	Ra>80
IP Rating	IP44
Dimmable	YES



SKU	Watt	Lumen	Lumen/W	Color	Dimension
2581	6W	450lm	75lm/W	CCT	Φ115x32mm
2582	9W	650lm	72lm/W	CCT	Φ115x32mm
2583	12W	900lm	75lm/W	CCT	Φ170x32mm
2584	20W	1600lm	80lm/W	CCT	Φ220x32mm
2585	24W	2100lm	88lm/W	CCT	Φ240x32mm



LED BACKLIT BUILT-IN MODULE	
Square - Home Edition - DOB Driver	
Input Voltage	85-265V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
2963	6W	360lm	60lm/W	6000K	120x120x24mm
2964	6W	360lm	60lm/W	4500K	120x120x24mm
2965	6W	360lm	60lm/W	2700K	120x120x24mm
2966	12W	840lm	70lm/W	6000K	170x170x24mm
2967	12W	840lm	70lm/W	4500K	170x170x24mm
2968	12W	840lm	70lm/W	2700K	170x170x24mm
2969	18W	1350lm	75lm/W	6000K	225x225x24mm
2970	18W	1350lm	75lm/W	4500K	225x225x24mm
2971	18W	1350lm	75lm/W	2700K	225x225x24mm
2972	24W	1920lm	80lm/W	6000K	300x300x27mm
2973	24W	1920lm	80lm/W	4500K	300x300x27mm
2974	24W	1920lm	80lm/W	2700K	300x300x27mm



SKU	Mini Panels Dimmable Drivers
6009	Driver 7-12*1W 0-10V
6025	Driver 5-9*1W 300mA
6026	Driver 10-18*1W 300mA
6027	Driver 20-30*1W 300mA

LED BUILT-IN / SURFACE MODULE	
CCT Light	
Input Voltage	175-265V 50/60Hz
Beam Angle	100°
CRI	Ra>80
IP Rating	IP20
Dimmable	No



SKU	Watt	Lumen	Lumen/W	Color	Dimension
2586	18W	1600lm	89lm/W	CCT	Φ225x19mm
2587	30W	3000lm	100lm/W	CCT	Φ330x19mm



LED Ceiling Lights

LED ceiling lights are a versatile and stylish choice for modern interiors, available in a wide range of shapes, sizes, and finishes to complement any room. Built with high-quality fittings, they combine energy efficiency with reliable performance, making them suitable for everything from elegant living spaces to practical office environments.

Features:

- Save up to 80% energy compared to conventional lighting
- Multiple colour temperature options (warm to cool)
- Choice of glossy or matte finishes
- Offered in standard sizes for easy integration
- Range of power outputs to suit different room sizes
- Long lifespan with low maintenance

Applications:

- Suspended and standard ceilings
- Residential spaces – living rooms, kitchens, bedrooms
- Offices, meeting rooms, and workspaces
- Ideal for large indoor areas such as halls or lobbies

NEW



CCT Switch

SKU	12841	12842	12843	12844
Body	Biege	Grayish-Biege	Dark Green	White

IP20

LED CEILING LAMP

60W - 3CCT Switch

Power	60W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	4500lm	IP Rating	IP20
Size	Φ510x85mm	Dimmable	No



NEW



CCT Switch

IP20

SKU	12854
Color	CCT

LED CEILING LAMP

54W - 3CCT - Remote Control

Power	54W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	4600lm	IP Rating	IP20
Size	Φ495x75mm	Dimmable	Yes



NEW



CCT Switch

IP20

SKU	12852	12853
Color	White	Black

LED CEILING LAMP

54W - 3CCT - Remote Control

Power	54W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	4600lm	IP Rating	IP20
Size	Φ490x120mm	Dimmable	Yes



NEW



IP20

SKU	12845
Color	4000K

LED CEILING LAMP

36W - CCT - 3 Step Mode

Power	36W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	4320lm	IP Rating	IP20
Size	Φ500x35mm	Dimmable	Yes



NEW



CCT Switch

IP20

SKU	12851
Color	White-Wood

LED CEILING LAMP

36W - 3CCT -Remote Control

Power	36W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	3240lm	IP Rating	IP20
Size	Φ420x80mm	Dimmable	Yes



NEW



CCT Switch

IP20

SKU	12846
Color	Black

LED CEILING LAMP

24W - CCT - Remote Control

Power	24W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	2880lm	IP Rating	IP20
Size	Φ390x75mm	Dimmable	Yes



NEW



SKU 12855
Color White



LED CEILING LAMP			
36W - 3CCT - Remote Control			
Power	36W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	3240lm	IP Rating	IP20
Size	Φ395x60mm	Dimmable	Yes



NEW



SKU 12858
Color White



LED CEILING LAMP			
36W - CCT - Remote Control			
Power	36W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	3240lm	IP Rating	IP20
Size	Φ395x80mm	Dimmable	Yes



NEW



SKU 12856
Color Black+Wood



LED CEILING LAMP			
54W - CCT - Remote Control			
Power	54W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	4600lm	IP Rating	IP20
Size	Φ485x80mm	Dimmable	Yes



NEW



SKU 12859
Color Black/Gold



LED CEILING LAMP			
36W - CCT - 3 Step Mode			
Power	36W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	3240lm	IP Rating	IP20
Size	Φ410x73mm	Dimmable	Yes



NEW



SKU 12857
Color Black+White



LED CEILING LAMP			
54W - CCT - Remote Control			
Power	54W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	4600lm	IP Rating	IP20
Size	Φ495x70mm	Dimmable	Yes



NEW




SKU 12860
Color White



LED CEILING LAMP			
36W - CCT - Remote Control			
Power	36W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	3240lm	IP Rating	IP20
Size	Φ405x80mm	Dimmable	Yes



NEW

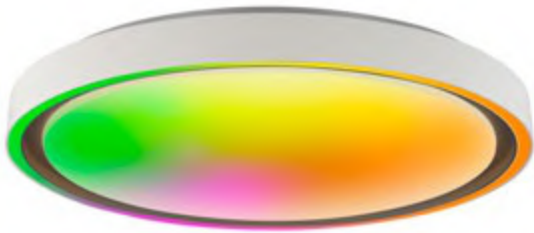

SKU
Color


12816
White



LED CEILING LAMP			
40W - 3CCT +RGB - Remote Control			
Power	40W+10W RGB	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	3000lm	IP Rating	IP20
Size	Φ490x80mm	Dimmable	Yes



NEW

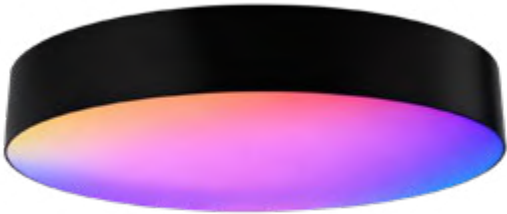

SKU
Color

12819
Black



LED CEILING LAMP			
40W - 3CCT +RGB - Remote Control			
Power	40W+10W RGB	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	3000lm	IP Rating	IP20
Size	Φ490x80mm	Dimmable	Yes



NEW



SKU
Color

12817
White



LED CEILING LAMP			
40W - 3CCT +RGB - Remote Control			
Power	40W+10W RGB	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	3000lm	IP Rating	IP20
Size	Φ490x80mm	Dimmable	Yes



NEW



SKU
Color

12820
White



LED CEILING LAMP			
40W - 3CCT +RGB - Remote Control			
Power	40W+10W RGB	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	3000lm	IP Rating	IP20
Size	Φ480x90mm	Dimmable	Yes



NEW



SKU
Color

12818
Black



LED CEILING LAMP			
40W - 3CCT +RGB - Remote Control			
Power	40W+10W RGB	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	3000lm	IP Rating	IP20
Size	Φ500x70mm	Dimmable	Yes



NEW



SKU
Color

12861
Black

12862
White



Hanging Accessories 1M Cable
For SKU:12851-12860



36x2W - CCT - Remote Control

Power	36Wx2	Beam Angle	120°
Input Voltage	AC175-260V 50Hz	CRI	Ra>80
Lumens	7500lm	IP Rating	IP20
Size	ø500x50mm	Dimmable	Yes

SKU

Color

2931

CCT

CCT

Switch



LED CEILING LIGHT

36x2W - CCT - Remote Control

Power	36Wx2	Beam Angle	120°
Input Voltage	AC175-260V 50Hz	CRI	Ra>80
Lumens	7500lm	IP Rating	IP20
Size	ø500x50mm	Dimmable	Yes





30W - CCT - Remote Control

Power	30W	Beam Angle	180°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	2940lm	IP Rating	IP20
Size	440x290x120mm	Dimmable	Yes

SKU

Color

19007

CCT

CCT

Switch



LED CEILING LAMP

30W - CCT - Remote Control

Power	30W	Beam Angle	180°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	2940lm	IP Rating	IP20
Size	440x290x120mm	Dimmable	Yes





48x2W - CCT - Remote Control

Power	48Wx2	Beam Angle	120°
Input Voltage	AC175-260V 50Hz	CRI	Ra>80
Lumens	7200lm	IP Rating	IP20
Size	ø500x50mm	Dimmable	Yes

SKU

Color

2930

CCT

CCT

Switch



LED CEILING LIGHT

48x2W - CCT - Remote Control

Power	48Wx2	Beam Angle	120°
Input Voltage	AC175-260V 50Hz	CRI	Ra>80
Lumens	7200lm	IP Rating	IP20
Size	ø500x50mm	Dimmable	Yes





45W - CCT - Remote Control

Power	45W	Beam Angle	180°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	4020lm	IP Rating	IP20
Size	620x290x120mm	Dimmable	Yes

SKU

Color

19008

CCT

CCT

Switch



LED CEILING LAMP

45W - CCT - Remote Control

Power	45W	Beam Angle	180°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	4020lm	IP Rating	IP20
Size	620x290x120mm	Dimmable	Yes





60x2W - CCT - Remote Control

Power	60Wx2	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	9000lm	IP Rating	IP20
Size	500x500x50mm	Dimmable	Yes

SKU

Color

2929

CCT

CCT

Switch



LED CEILING LIGHT

60x2W - CCT - Remote Control

Power	60Wx2	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	9000lm	IP Rating	IP20
Size	500x500x50mm	Dimmable	Yes





50W - CCT - Remote Control

Power	50W	Beam Angle	180°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	4580lm	IP Rating	IP20
Size	650x470x85mm	Dimmable	Yes

SKU

Color

19009

CCT

CCT

Switch




LED CEILING LAMP

50W - CCT - Remote Control

Power	50W	Beam Angle	180°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	4580lm	IP Rating	IP20
Size	650x470x85mm	Dimmable	Yes



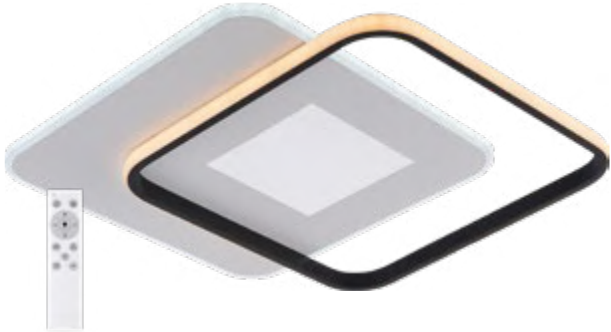

SKU

Color

19010

CCT

CCT

Switch



LED CEILING LAMP

60W - CCT - Remote Control

Power	60W	Beam Angle	180°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	4800lm	IP Rating	IP20
Size	455x455x50mm	Dimmable	Yes





SKU

Color

19013

3000K - 6000K

CCT

Switch



LED CEILING LAMP

60W - CCT - Remote Control

Power	60W	Beam Angle	180°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	5180lm	IP Rating	IP20
Size	450x450x45mm	Dimmable	Yes





SKU

Color

19011

CCT

CCT

Switch



LED CEILING LAMP

54W - CCT - Remote Control

Power	54W	Beam Angle	180°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	4120lm	IP Rating	IP20
Size	460x370x45mm	Dimmable	Yes





SKU

Color

19012

3000K - 6000K

CCT

Switch



LED CEILING LAMP

54W - CCT - Remote Control

Power	54W	Beam Angle	180°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	4120lm	IP Rating	IP20
Size	460x370x45mm	Dimmable	Yes





SKU

Color

19016

3000K - 6000K

CCT

Switch



LED CEILING LAMP

16W - CCT

Power	16W	Beam Angle	180°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	1480lm	IP Rating	IP20
Size	Φ175x45.5mm	Dimmable	No





SKU

Color

19015

3000K - 6000K

CCT


Switch



LED CEILING LAMP

23W - CCT

Power	23W	Beam Angle	180°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	2080lm	IP Rating	IP20
Size	195x195x45mm	Dimmable	No

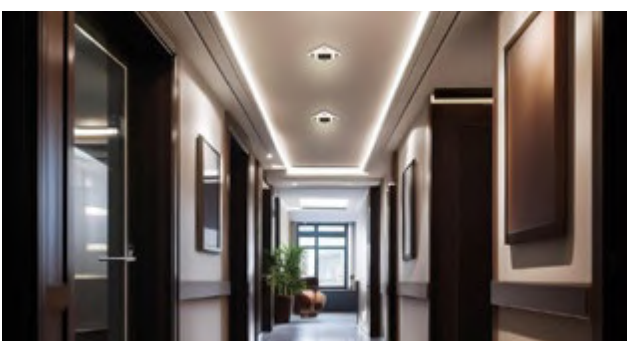



SKU19014

ColorCCT

CCTSwitch

IP20

LED CEILING LAMP

42W - CCT - Remote Control

Power	42W	Beam Angle	180°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	2340lm	IP Rating	IP20
Size	Φ400x100 mm	Dimmable	No





SKU19063

Color3000K

IP20

LED CEILING LAMP

106W

Power	106W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	8460lm	IP Rating	IP20
Size	1000x530x61mm	Dimmable	No





SKU19053

Color3000K

IP20

LED CEILING LAMP

50W

Power	50W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	4000lm	IP Rating	IP20
Size	Φ830mm	Dimmable	No





SKU19073

Color3000K


IP20

LED CEILING LAMP

7W

Power	7W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	560lm	IP Rating	IP20
Size	Φ220mm	Dimmable	No



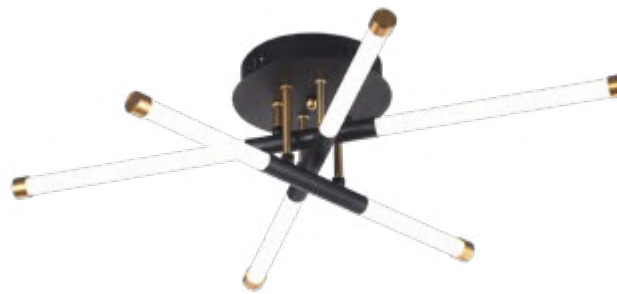

SKU19070

Color3000K

IP20

LED CEILING LAMP

15W

Power	15W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	1200lm	IP Rating	IP20
Size	Φ700mm	Dimmable	No





SKU19072

Color3000K

IP20

LED CEILING LAMP

13W

Power	13W	Beam Angle	180°
Input Voltage	AC175-265V 50Hz	CRI	Ra>80
Lumens	1040lm	IP Rating	IP20
Size	230x230x90mm	Dimmable	No





SKU

Color

12823

CCT

CCT

Switch



LED CEILING LAMP			
86W - CCT - Remote Control			
Power	86W	Beam Angle	120°
Input Voltage	AC180-265V 50Hz	CRI	Ra>80
Lumens	6450lm	IP Rating	IP20
Size	800x180x130mm	Dimmable	Yes





SKU

Color

12831

CCT

CCT

Switch



LED CEILING LAMP			
78W - CCT - Remote Control			
Power	78W	Beam Angle	120°
Input Voltage	AC180-265V 50Hz	CRI	Ra>80
Lumens	5850lm	IP Rating	IP20
Size	Φ480x60mm	Dimmable	Yes





SKU

Color

12821

CCT

CCT

Switch



LED CEILING LAMP			
44W - CCT - Remote Control			
Power	44W	Beam Angle	120°
Input Voltage	AC180-265V 50Hz	CRI	Ra>80
Lumens	3300lm	IP Rating	IP20
Size	420x440x88mm	Dimmable	Yes





SKU

Color

12833

CCT

CCT

Switch



LED CEILING LAMP			
84W - CCT - Remote Control			
Power	84W	Beam Angle	120°
Input Voltage	AC180-265V 50Hz	CRI	Ra>80
Lumens	6300lm	IP Rating	IP20
Size	560x410x60mm	Dimmable	Yes





SKU

Color

12822

CCT


CCT

Switch



LED CEILING LAMP			
46W - CCT - Remote Control			
Power	46W	Beam Angle	120°
Input Voltage	AC180-265V 50Hz	CRI	Ra>80
Lumens	3450lm	IP Rating	IP20
Size	430x400x100mm	Dimmable	Yes



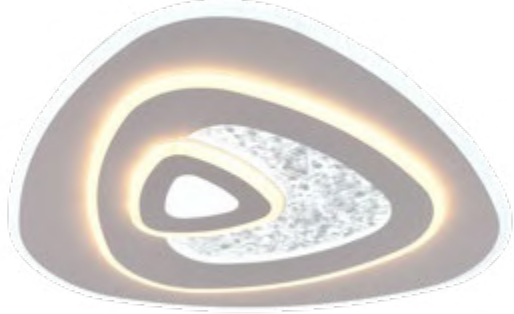

SKU

Color

12832

CCT

CCT

Switch



LED CEILING LAMP			
88W - CCT - Remote Control			
Power	88W	Beam Angle	120°
Input Voltage	AC180-265V 50Hz	CRI	Ra>80
Lumens	6600lm	IP Rating	IP20
Size	Φ480x60mm	Dimmable	Yes





SKU

Color

12828

CCT

CCT

Switch

IP20

LED CEILING LAMP

84W - CCT - Remote Control

Power	84W	Beam Angle	120°
Input Voltage	AC180-265V 50Hz	CRI	Ra>80
Lumens	6300lm	IP Rating	IP20
Size	545x450x75mm	Dimmable	Yes





SKU

Color

12825

CCT

CCT

Switch

IP20

LED CEILING LAMP

64W - CCT - Remote Control

Power	64W	Beam Angle	120°
Input Voltage	AC180-265V 50Hz	CRI	Ra>80
Lumens	4800lm	IP Rating	IP20
Size	Φ480x60 mm	Dimmable	Yes





SKU

Color

12827

CCT

CCT

Switch


IP20

LED CEILING LAMP

68W - CCT - Remote Control

Power	68W	Beam Angle	120°
Input Voltage	AC180-265V 50Hz	CRI	Ra>80
Lumens	5100lm	IP Rating	IP20
Size	Φ480x60mm	Dimmable	Yes



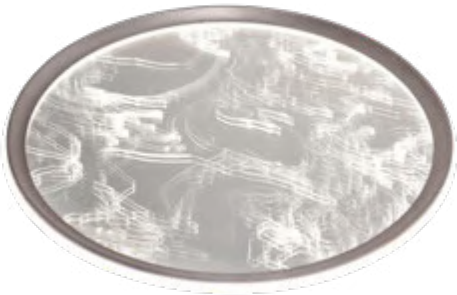

SKU

Color

12824

CCT

CCT

Switch


IP20

LED CEILING LAMP

68W - CCT - Remote Control

Power	68W	Beam Angle	120°
Input Voltage	AC180-265V 50Hz	CRI	Ra>80
Lumens	5100lm	IP Rating	IP20
Size	φ500x55mm	Dimmable	Yes



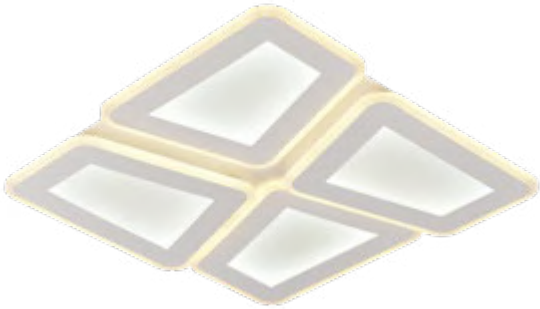

SKU

Color

12826

CCT

CCT

Switch


IP20

LED CEILING LAMP

128W - CCT - Remote Control

Power	128W	Beam Angle	120°
Input Voltage	AC180-265V 50Hz	CRI	Ra>80
Lumens	9600lm	IP Rating	IP20
Size	480x480x65mm	Dimmable	Yes



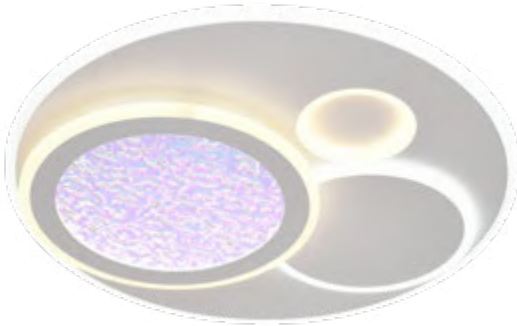

SKU

Color

12834

CCT

CCT

Switch

IP20

LED CEILING LAMP

84W - CCT - Remote Control

Power	84W	Beam Angle	120°
Input Voltage	AC180-265V 50Hz	CRI	Ra>80
Lumens	6300lm	IP Rating	IP20
Size	φ500x55mm	Dimmable	Yes





SKU

12829

Color

CCT

CCT Switch

IP20

LED CEILING LAMP

78W - CCT - Remote Control

Power	78W	Beam Angle	120°
Input Voltage	AC180-265V 50Hz	CRI	Ra>80
Lumens	5850lm	IP Rating	IP20
Size	500x545x65mm	Dimmable	Yes





SKU

12802

12803

Body

Black

Silver

CCT Switch


IP20

LED CEILING LAMP

36W - CCT Switch

Power	36W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	2700lm	IP Rating	IP20
Size	Φ485x65mm	Dimmable	No



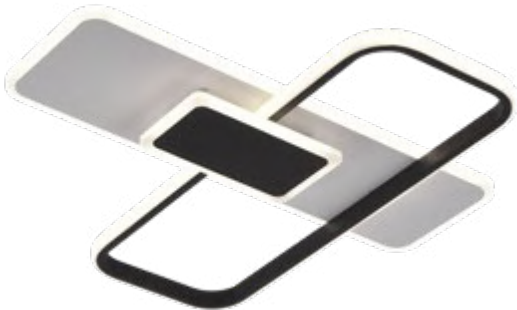

SKU

12830

Color

CCT

CCT Switch

IP20

LED CEILING LAMP

68W - CCT - Remote Control

Power	68W	Beam Angle	120°
Input Voltage	AC180-265V 50Hz	CRI	Ra>80
Lumens	5100lm	IP Rating	IP20
Size	600x610x65mm	Dimmable	Yes





CCT Switch

IP20

SKU

12804

12805

12806

12807

Body

Grey

Taupe

Red Velvet

Indigo

LED CEILING LAMP

36W - CCT Switch

Power	36W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	2700lm	IP Rating	IP20
Size	Φ515x80mm	Dimmable	No





SKU

12801

Body

Silver

CCT Switch

IP20

LED CEILING LAMP

12W - CCT Switch

Power	12W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	900lm	IP Rating	IP20
Size	Φ293x65mm	Dimmable	No





SKU

12812

12811

Body

Black

White

CCT Switch

IP20

LED CEILING LAMP

24W - CCT Switch

Power	24W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	1800lm	IP Rating	IP20
Size	Φ510x115mm	Dimmable	No





SKU
Body

12810
Cyan



LED CEILING LAMP			
12W - CCT Switch			
Power	12W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	900lm	IP Rating	IP20
Size	Φ330x100mm	Dimmable	No



SKU
Body

12813
Black

12814
White



LED CEILING LAMP			
48W - CCT - Remote Control			
Power	48W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	3600lm	IP Rating	IP20
Size	Φ395x60mm	Dimmable	Yes



SKU
Body

12809
Reseda



LED CEILING LAMP			
24W - CCT Switch			
Power	24W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	1800lm	IP Rating	IP20
Size	Φ440x110mm	Dimmable	No



SKU
Body

12815
Oak Wood



LED CEILING LAMP			
60W - CCT - Remote Control			
Power	60W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	4500lm	IP Rating	IP20
Size	Φ510x85mm	Dimmable	Yes



SKU
Body

12808
White



LED CEILING LAMP			
36W - CCT Switch			
Power	36W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	2700lm	IP Rating	IP20
Size	Φ555x115mm	Dimmable	No





LED CEILING LIGHT	
CCT Light - RGB Ring - Remote Control	
Input Voltage	220-240V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	YES

SKU	Watt	Lumen	Lumen/W	Color	Dimension
-----	------	-------	---------	-------	-----------

Black

2941	18W	1440lm	80lm/W	CCT	Φ293x26mm
2942	24W	1920lm	80lm/W	CCT	Φ420x26mm
2943	32W	2560lm	80lm/W	CCT	Φ540x30mm

White

2944	18W	1440lm	80lm/W	CCT	Φ293x26mm
2945	24W	1920lm	80lm/W	CCT	Φ420x26mm
2946	32W	2560lm	80lm/W	CCT	Φ540x30mm



LED CEILING LIGHT	
Outdoor - CCT Light	
Input Voltage	220-240V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
-----	------	-------	---------	-------	-----------

Black

2823	20W	2000lm	100lm/W	CCT	Φ202x51mm
2824	30W	3000lm	100lm/W	CCT	Φ302x55mm
2827	20W	2000lm		CCT	Φ202x51mm
2828	30W	3000lm		CCT	Φ302x55mm

White

2821	20W	2000lm	100lm/W	CCT	Φ202x51mm
2822	30W	3000lm	100lm/W	CCT	Φ302x55mm
2825	20W	2000lm		CCT	Φ202x51mm
2826	30W	3000lm		CCT	Φ302x55mm



LED CEILING LIGHT	
CCT Light - Switch	
Input Voltage	220-240V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP54
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
-----	------	-------	---------	-------	-----------

Round

2501	18W	1880lm	104lm/W	CCT	Φ220x51mm
2502	24W	2565lm	107lm/W	CCT	Φ280x51mm
2505	18W	1880lm		CCT	Φ220x51mm

Square

2503	18W	1880lm	104lm/W	CCT	Φ220x51mm
2504	24W	2565lm	107lm/W	CCT	Φ280x51mm
2506	18W	1880lm		CCT	Φ220x51mm



LED CEILING LIGHT	
CCT Light + DIP Switch	
Input Voltage	220-240V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
-----	------	-------	---------	-------	-----------

Matt White

2831	12W	880lm	74lm/W	CCT	Φ260x60mm
2833	18W	1550lm	86lm/W	CCT	Φ335x60mm
2835	24W	1990lm	83lm/W	CCT	Φ385x60mm


Dotty Sparkle

2832	12W	880lm	74lm/W	CCT	Φ260x60mm
2834	18W	1550lm	86lm/W	CCT	Φ335x60mm
2836	24W	1990lm	83lm/W	CCT	Φ385x60mm



LED CEILING LIGHT	
CCT Light	
Input Voltage	220-240V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP44
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
2947	12W	1200lm	100lm/W	CCT	Φ230x45mm
2948	18W	1800lm	100lm/W	CCT	Φ280x45mm
2949	24W	2400lm	100lm/W	CCT	Φ380x45mm
2950	36W	3600lm	100lm/W	CCT	Φ380x45mm

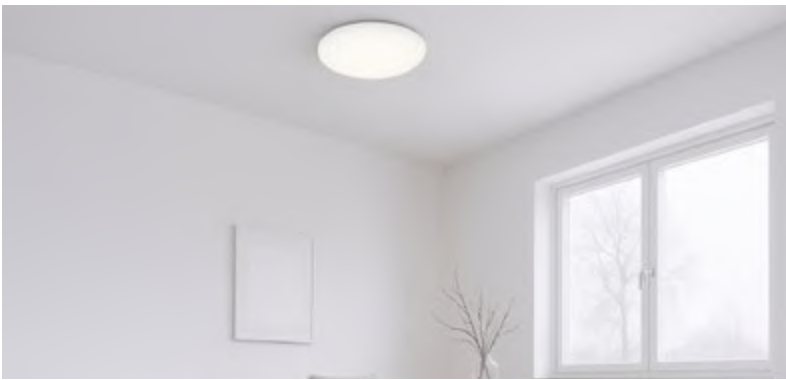

LED CEILING LIGHTS	
City Line - Matt White	
Input Voltage	175-265V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
2840	12W	880lm	73lm/W	6000K	Φ230x50mm
2842	12W	880lm	73lm/W	3000K	Φ230x50mm
2845	18W	1550lm	86lm/W	3000K	Φ300x65mm
2848	24W	1990lm	83lm/W	3000K	Φ350x65mm



LED COB DOWNLIGHT	
Aluminium	
Input Voltage	85-265V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

	SKU	Watt	Lumen	Lumen/W	Color	Dimension
Black	12037	7W	700lm	100lm/W	4000K	Φ75x72mm
	12038	7W	700lm	100lm/W	3000K	Φ75x72mm
	12041	12W	1200lm	100lm/W	4000K	Φ85x72mm
	12042	12W	1200lm	100lm/W	3000K	Φ85x72mm
White	12039	7W	700lm	100lm/W	4000K	Φ75x72mm
	12040	7W	700lm	100lm/W	3000K	Φ75x72mm
	12043	12W	1200lm	100lm/W	4000K	Φ85x72mm
	12044	12W	1200lm	100lm/W	3000K	Φ85x72mm



LED CEILING LIGHTS	
City Line - Stars Cover	
Input Voltage	175-265V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
2851	12W	880lm	73lm/W	3000K	φ260x50mm
2854	18W	1550lm	86lm/W	3000K	φ330x60mm



LED CEILING LIGHT

2xE27 Holder - PIR

Sockets	2xE27	CRI	Ra>80
Input Voltage	AC220-240V 50Hz	IP Rating	IP20
Beam Angle	120°	Dimmable	No

SKU	2819
Color	White



LED SURFACE CEILING

Bulkhead - Thermoplastic

Input Voltage	220-240V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
2807	8W	640lm	80lm/W	4500K	ø270x102 mm
2808	8W	640lm	80lm/W	2700K	ø270x102 mm
2813	13W	1050lm	81lm/W	4500K	ø320x113 mm
2814	13W	1050lm	81lm/W	2700K	ø320x113 mm
2809	8W	640lm	80lm/W	4500K	ø270x102 mm
2810	8W	640lm	80lm/W	2700K	ø270x102 mm
2815	13W	1050lm	81lm/W	4500K	ø320x113 mm
2816	13W	1050lm	81lm/W	2700K	ø320x113 mm
2811	8W	640lm	80lm/W	4500K	ø270x102 mm
2812	8W	640lm	80lm/W	2700K	ø270x102 mm
2818	13W	1050lm	81lm/W	2700K	ø320x113 mm



LED SURFACE CEILING

Thermoplastic - PIR

Shape	Round	CRI	Ra>80
Input Voltage	AC220-240V 50Hz	IP Rating	IP20
Beam Angle	120°	Dimmable	No

SKU	Watt	Lumen	Lumen/W	Colour	Dimension
2804	18W	1260lm	70lm/W	6000K	ø295x70 mm
2805	18W	1260lm	70lm/W	4500K	ø295x70 mm
2806	18W	1260lm	70lm/W	2700K	ø295x70 mm



LED SURFACE CEILING

Bulkhead - Thermoplastic

Shape	Bulkhead	CRI	Ra>80
Input Voltage	AC220-240V 50Hz	IP Rating	IP54
Beam Angle	120°	Dimmable	No

SKU	Watt	Lumen	Lumen/W	Colour	Dimension
2801	8W	640lm	80lm/W	6000K	160x90x51mm
2802	8W	640lm	80lm/W	4500K	160x90x51mm
2803	8W	640lm	80lm/W	2700K	160x90x51mm



LED CEILING LIGHT

CCT - Remote Control + Dimming

Input Voltage	185-265V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	Yes

SKU	Watt	Lumen	Lumen/W	Color	Dimension
2858	36W	2500lm	70lm/W	CCT	Φ460x70mm
2859	60W	3600lm	60lm/W	CCT	Φ560x70mm

Round

SKU	Watt	Lumen	Lumen/W	Color	Dimension
2860	36W	2700lm	75lm/W	CCT	430x430x70mm
2861	60W	4500lm	75lm/W	CCT	530x530x70mm

Square



LED CEILING LIGHT	
Round - SMD5630	
Input Voltage	175-260V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

	SKU	Watt	Lumen	Lumen/W	Color	Dimension
Black	2901	18W	1350lm	75lm/W	4500K	Φ250x50mm
	2902	18W	1350lm	75lm/W	3000K	Φ250x50mm
	2905	30W	2400lm	80lm/W	4500K	Φ400x50mm
	2906	30W	2400lm	80lm/W	3000K	Φ400x50mm
	2909	54W	4050lm	75lm/W	4500K	Φ600x50mm
	2910	54W	4050lm	75lm/W	3000K	Φ600x50mm

White	2903	18W	1350lm	75lm/W	4500K	Φ250x50mm
	2904	18W	1350lm	75lm/W	3000K	Φ250x50mm
	2907	30W	2400lm	80lm/W	4500K	Φ400x50mm
	2908	30W	2400lm	80lm/W	3000K	Φ400x50mm
	2911	54W	4050lm	75lm/W	4500K	Φ600x50mm
	2912	54W	4050lm	75lm/W	3000K	Φ600x50mm



LED CEILING LIGHT	
Round - SMD5630	
Input Voltage	175-260V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

	SKU	Watt	Lumen	Lumen/W	Color	Dimension
Black	2913	36W	2700lm	75lm/W	4500K	Φ500x50mm
	2914	36W	2700lm	75lm/W	3000K	Φ500x50mm
	2917	64W	4800lm	75lm/W	4500K	Φ800x50mm
	2918	64W	4800lm	75lm/W	3000K	Φ800x50mm


White	2915	36W	2700lm	75lm/W	4500K	Φ500x50mm
	2916	36W	2700lm	75lm/W	3000K	Φ500x50mm
	2919	64W	4800lm	75lm/W	4500K	Φ800x50mm
	2920	64W	4800lm	75lm/W	3000K	Φ800x50mm



LED CEILING LIGHT	
Square - SMD5630	
Input Voltage	175-260V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

	SKU	Watt	Lumen	Lumen/W	Color	Dimension
Black	2921	30W	2250lm	75lm/W	4500K	380x380x50mm
	2922	30W	2250lm	75lm/W	3000K	380x380x50mm
	2925	64W	4800lm	75lm/W	4500K	600x600x50mm
	2926	64W	4800lm	75lm/W	3000K	600x600x50mm

White	2923	30W	2250lm	75lm/W	4500K	380x380x50mm
	2924	30W	2250lm	75lm/W	3000K	380x380x50mm
	2927	64W	4800lm	75lm/W	4500K	600x600x50mm
	2928	64W	4800lm	75lm/W	3000K	600x600x50mm

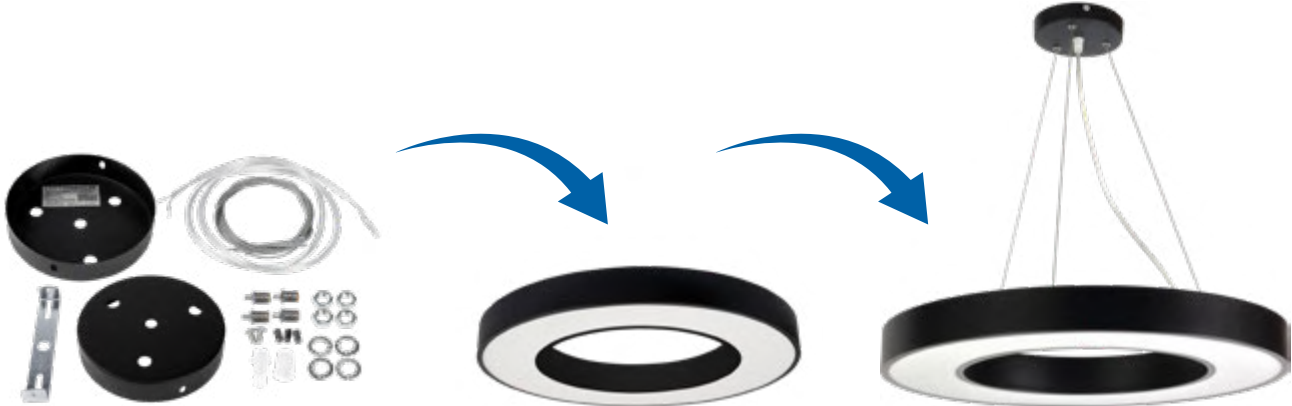

HANGING ACCESSORIES	
FOR SKU:2901-2928	
Material	Metal+ plastic-coated
Dimensions	120x25mm

SKU	Color
5180	White
5181	Black



bridgelux



LED DOWNLIGHT SURFACE	
Bridgelux Chip - Aluminium	
Input Voltage	220-240V 50/60Hz
Beam Angle	24°
CRI	Ra>90
IP Rating	IP20
Dimmable	No



	SKU	Watt	Lumen	Lumen/W	Color	Dimension
Black	12001	10W	800lm	80lm/W	4000K	Φ100x65mm
	12002	10W	800lm	80lm/W	3000K	Φ100x65mm
White	12003	10W	800lm	80lm/W	4000K	Φ100x65mm
	12004	10W	800lm	80lm/W	3000K	Φ100x65mm

bridgelux



LED DOWNLIGHT SURFACE	
Adjustable - Aluminium	
Input Voltage	220-240V 50/60Hz
Beam Angle	24°
CRI	Ra>90
IP Rating	IP20
Dimmable	No



	SKU	Watt	Lumen	Lumen/W	Color	Dimension
Black	12005	12W	960lm	80lm/W	4000K	Φ100x100mm
	12006	12W	960lm	80lm/W	3000K	Φ100x100mm
White	12007	12W	960lm	80lm/W	4000K	Φ100x100mm
	12008	12W	960lm	80lm/W	3000K	Φ100x100mm



LED COB DOWNLIGHT	
Adjustable - Aluminium	
Input Voltage	85-265V 50/60Hz
Beam Angle	24°
CRI	Ra>90
IP Rating	IP20
Dimmable	No



	SKU	Watt	Lumen	Lumen/W	Color	Dimension
Black	12021	20W	2000lm	100lm/W	CCT	Φ146x75mm
	12023	30W	3000lm	100lm/W	CCT	Φ176x87mm
White	12022	20W	2000lm	100lm/W	CCT	Φ146x75mm
	12024	30W	3000lm	100lm/W	CCT	Φ176x87mm



LED COB DOWNLIGHT	
Adjustable - Aluminium	
Input Voltage	85-265V 50/60Hz
Beam Angle	24°
CRI	Ra>90
IP Rating	IP20
Dimmable	No



	SKU	Watt	Lumen	Cut Size	Color	Dimension
Black	12025	10W	1000lm	Φ105mm	CCT	Φ120x50mm
	12027	15W	1500lm	Φ150mm	CCT	Φ167x50mm
	12029	30W	3000lm	Φ185mm	CCT	Φ200x65mm
White	12026	10W	1000lm	Φ105mm	CCT	Φ120x50mm
	12028	15W	1500lm	Φ150mm	CCT	Φ167x50mm
	12030	30W	3000lm	Φ185mm	CCT	Φ200x65mm



LED COB DOWNLIGHT	
- Aluminium	
Input Voltage	85-265V 50/60Hz
Beam Angle	24°
CRI	Ra>90
IP Rating	IP20
Dimmable	No



	SKU	Watt	Lumen	Cut Size	Color	Dimension
Black	12031	10W	1000lm	Φ75mm	CCT	Φ86x43mm
	12033	15W	1500lm	Φ95mm	CCT	Φ106x46mm
	12035	20W	2000lm	Φ115mm	CCT	Φ135x51mm
White	12032	10W	1000lm	Φ75mm	CCT	Φ86x43mm
	12034	15W	1500lm	Φ95mm	CCT	Φ106x46mm
	12036	20W	2000lm	Φ115mm	CCT	Φ135x51mm



LED DOWNLIGHT
Bridgelux Chip - Aluminium 3CCT

Power	15W	Beam Angle	120°
Input Voltage	AC85-265V	CRI	Ra>90
Lumens	1500lm	IP Rating	IP20
Size	191x59mm	Dimmable	No

SKU	12045	12046		
Color	White	Black		



LED DOWNLIGHT
Bridgelux Chip - Aluminium 3CCT

Power	2x15W	Beam Angle	120°
Input Voltage	AC85-265V	CRI	Ra>90
Lumens	3000lm	IP Rating	IP20
Size	323x59mm	Dimmable	No

SKU	12047	12048		
Color	White	Black		



LED COB DOWNLIGHT
Adjustable - Round

Input Voltage	175-265Vac 50/60Hz
Beam Angle	50°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
3264	5W	375lm	75lm/W	6000K	Φ90x40mm
3265	5W	375lm	75lm/W	4500K	Φ90x40mm
3266	5W	375lm	75lm/W	2700K	Φ90x40mm
3284	7W	525lm	75lm/W	6000K	Φ90x40mm
3285	7W	525lm	75lm/W	4500K	Φ90x40mm
3286	7W	525lm	75lm/W	2700K	Φ90x40mm
3290	10W	750lm	75lm/W	6000K	Φ115x50mm
3291	10W	750lm	75lm/W	4500K	Φ115x50mm
3292	10W	750lm	75lm/W	2700K	Φ115x50mm



LED COB DOWNLIGHT
Adjustable-

Input Voltage	175-265Vac 50/60Hz
Beam Angle	50°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
3267	5W	375lm	75lm/W	6000K	90x90x40mm
3268	5W	375lm	75lm/W	4500K	90x90x40mm
3269	5W	375lm	75lm/W	2700K	90x90x40mm
3287	7W	525lm	75lm/W	6000K	90x90x40mm
3288	7W	525lm	75lm/W	4500K	90x90x40mm
3289	7W	525lm	75lm/W	2700K	90x90x40mm
3293	10W	750lm	75lm/W	6000K	115x115x50mm
3294	10W	750lm	75lm/W	4500K	115x115x50mm
3295	10W	750lm	75lm/W	2700K	115x115x50mm



LED DOWNLIGHT			
Power Selectable - CCT Light - Round			
Power	3W-5W-7W	Beam Angle	60°
Input Voltage	AC220-240V	CRI	Ra>80
Lumens	240-400-560lm	IP Rating	IP20
Size	ø90x25mm	Dimmable	No
SKU	13201	13202	
Color	White	Black	
 			



LED DOWNLIGHT			
Power Selectable - CCT Light - Square			
Power	3W-5W-7W	Beam Angle	60°
Input Voltage	AC220-240V	CRI	Ra>80
Lumens	240-400-560lm	IP Rating	IP20
Size	90x90x25mm	Dimmable	No
SKU	13203	13204	
Color	White	Black	
 			



LED DOWNLIGHT			
Surface or Build-in - CCT Light			
Power	5W	Beam Angle	55°
Input Voltage	AC220-240V	CRI	Ra>80
Lumens	500lm	IP Rating	IP20
Size	ø92x30 mm	Dimmable	No
SKU	12009		
Color	CCT		
			





LED COB DOWNLIGHT	
TÜV - White	
Input Voltage	220-240V 50/60Hz
Beam Angle	145°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
3270	15W	1200lm	80lm/W	6000K	Φ166x75mm
3271	15W	1200lm	80lm/W	4500K	Φ166x75mm
3272	15W	1200lm	80lm/W	2700K	Φ166x75mm
3273	20W	1600lm	80lm/W	6000K	Φ195x80mm
3274	20W	1600lm	80lm/W	4500K	Φ195x80mm
3275	20W	1600lm	80lm/W	2700K	Φ195x80mm
3276	30W	2500lm	80lm/W	6000K	Φ223x80mm
3277	30W	2500lm	80lm/W	4500K	Φ223x80mm
3278	30W	2500lm	80lm/W	2700K	Φ223x80mm



LED COB DOWNLIGHT	
Adjustable - Round	
Input Voltage	175-265V 50/60Hz
Beam Angle	60°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

	SKU	Watt	Lumen	Color	Color	Dimension
White	3201	8W	560lm	White	6000K	Φ95x55mm
	3206	8W	560lm	White	4500K	Φ95x55mm
	3202	8W	560lm	White	2700K	Φ95x55mm
Inox	3203	8W	560lm	Inox	6000K	Φ95x55mm
	3205	8W	560lm	Inox	4500K	Φ95x55mm
	3204	8W	560lm	Inox	2700K	Φ95x55mm



LED COB DOWNLIGHT	
TÜV - White	
Input Voltage	220-240V 50/60Hz
Beam Angle	60°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
3260	40W	4000lm	100lm/W	6000K	Φ195x110mm
3261	40W	4000lm	100lm/W	4500K	Φ195x110mm
3262	60W	5600lm	93lm/W	6000K	Φ231x125mm
3263	60W	5600lm	93lm/W	4500K	Φ231x125mm



LED COB DOWNLIGHT	
Adjustable - Square	
Input Voltage	175-265V 50/60Hz
Beam Angle	60°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

	SKU	Watt	Lumen	Color	Color	Dimension
White	3207	8W	560lm	White	6000K	100x100x70mm
	3222	8W	560lm	White	4500K	100x100x70mm
	3212	8W	560lm	White	2700K	100x100x70mm
Inox	3223	8W	560lm	Inox	6000K	100x100x70mm
	3224	8W	560lm	Inox	4500K	100x100x70mm
	3225	8W	560lm	Inox	2700K	100x100x70mm



SKU5045

Chrome bezel

SKU5046

Brushed bezel

White bezel included

LED SMD DOWNLIGHT			
Fire-Rated - CCT - PF>0.9			
Power	10W	Beam Angle	40°
Input Voltage	AC220-240V	CRI	Ra>80
Lumens	750lm	IP Rating	IP65
Size	ø84x67mm	Dimmable	YES

SKU5044

ColorCCT





SKU5042

Color4000K

SKU5041

Color3000K

Magnetic replaceable covers

LED SMD DOWNLIGHT			
Fire-Rated - PF>0.9			
Power	6W	Beam Angle	40°
Input Voltage	AC220-240V	CRI	Ra>80
Lumens	540lm	IP Rating	IP65
Size	ø84x67mm	Dimmable	YES

SKU5042

Color4000K

SKU5041

Color3000K





SKU5043

ColorCCT

Magnetic replaceable covers

LED SMD DOWNLIGHT			
Fire-Rated - CCT - PF>0.9			
Power	8W	Beam Angle	40°
Input Voltage	AC220-240V	CRI	Ra>80
Lumens	630lm	IP Rating	IP65
Size	ø82x80mm	Dimmable	YES

SKU5043

ColorCCT





SKU15002

ColorCCT

LED SMD DOWNLIGHT			
Fire-Rated - 3CCT - PF>0.9			
Power	10W	Beam Angle	40°
Input Voltage	AC220-240V	CRI	Ra>80
Lumens	900lm	IP Rating	IP20
Size	ø85x69mm	Dimmable	YES

SKU15002

ColorCCT





LED SPOT/DOWNLIGHT			
3CCT Light - DOB			
Power	5W	Colors	3CCT
Input Voltage	AC220-240V	CRI	Ra>80
Lumens	400lm	IP Rating	IP20
Size	ø50x28mm	Dimmable	No

SKU1984

Beam Angle110°

SKU1985

Beam Angle50°






LED DOWNLIGHT						
Plastic						
Input Voltage	220-240V 50/60Hz					
Beam Angle	28°					
CRI	Ra>80					
IP Rating	IP20					
Dimmable	No					



	SKU	Watt	Lumen	Shape	Color	Dimension
Black	3296	1W	60lm	Round	3000K	Φ35x29 mm
	3298	1W	60lm	Square	3000K	Φ35x29 mm
White	3297	1W	60lm	Round	3000K	Φ35x29 mm
	3299	1W	60lm	Square	3000K	Φ35x29 mm

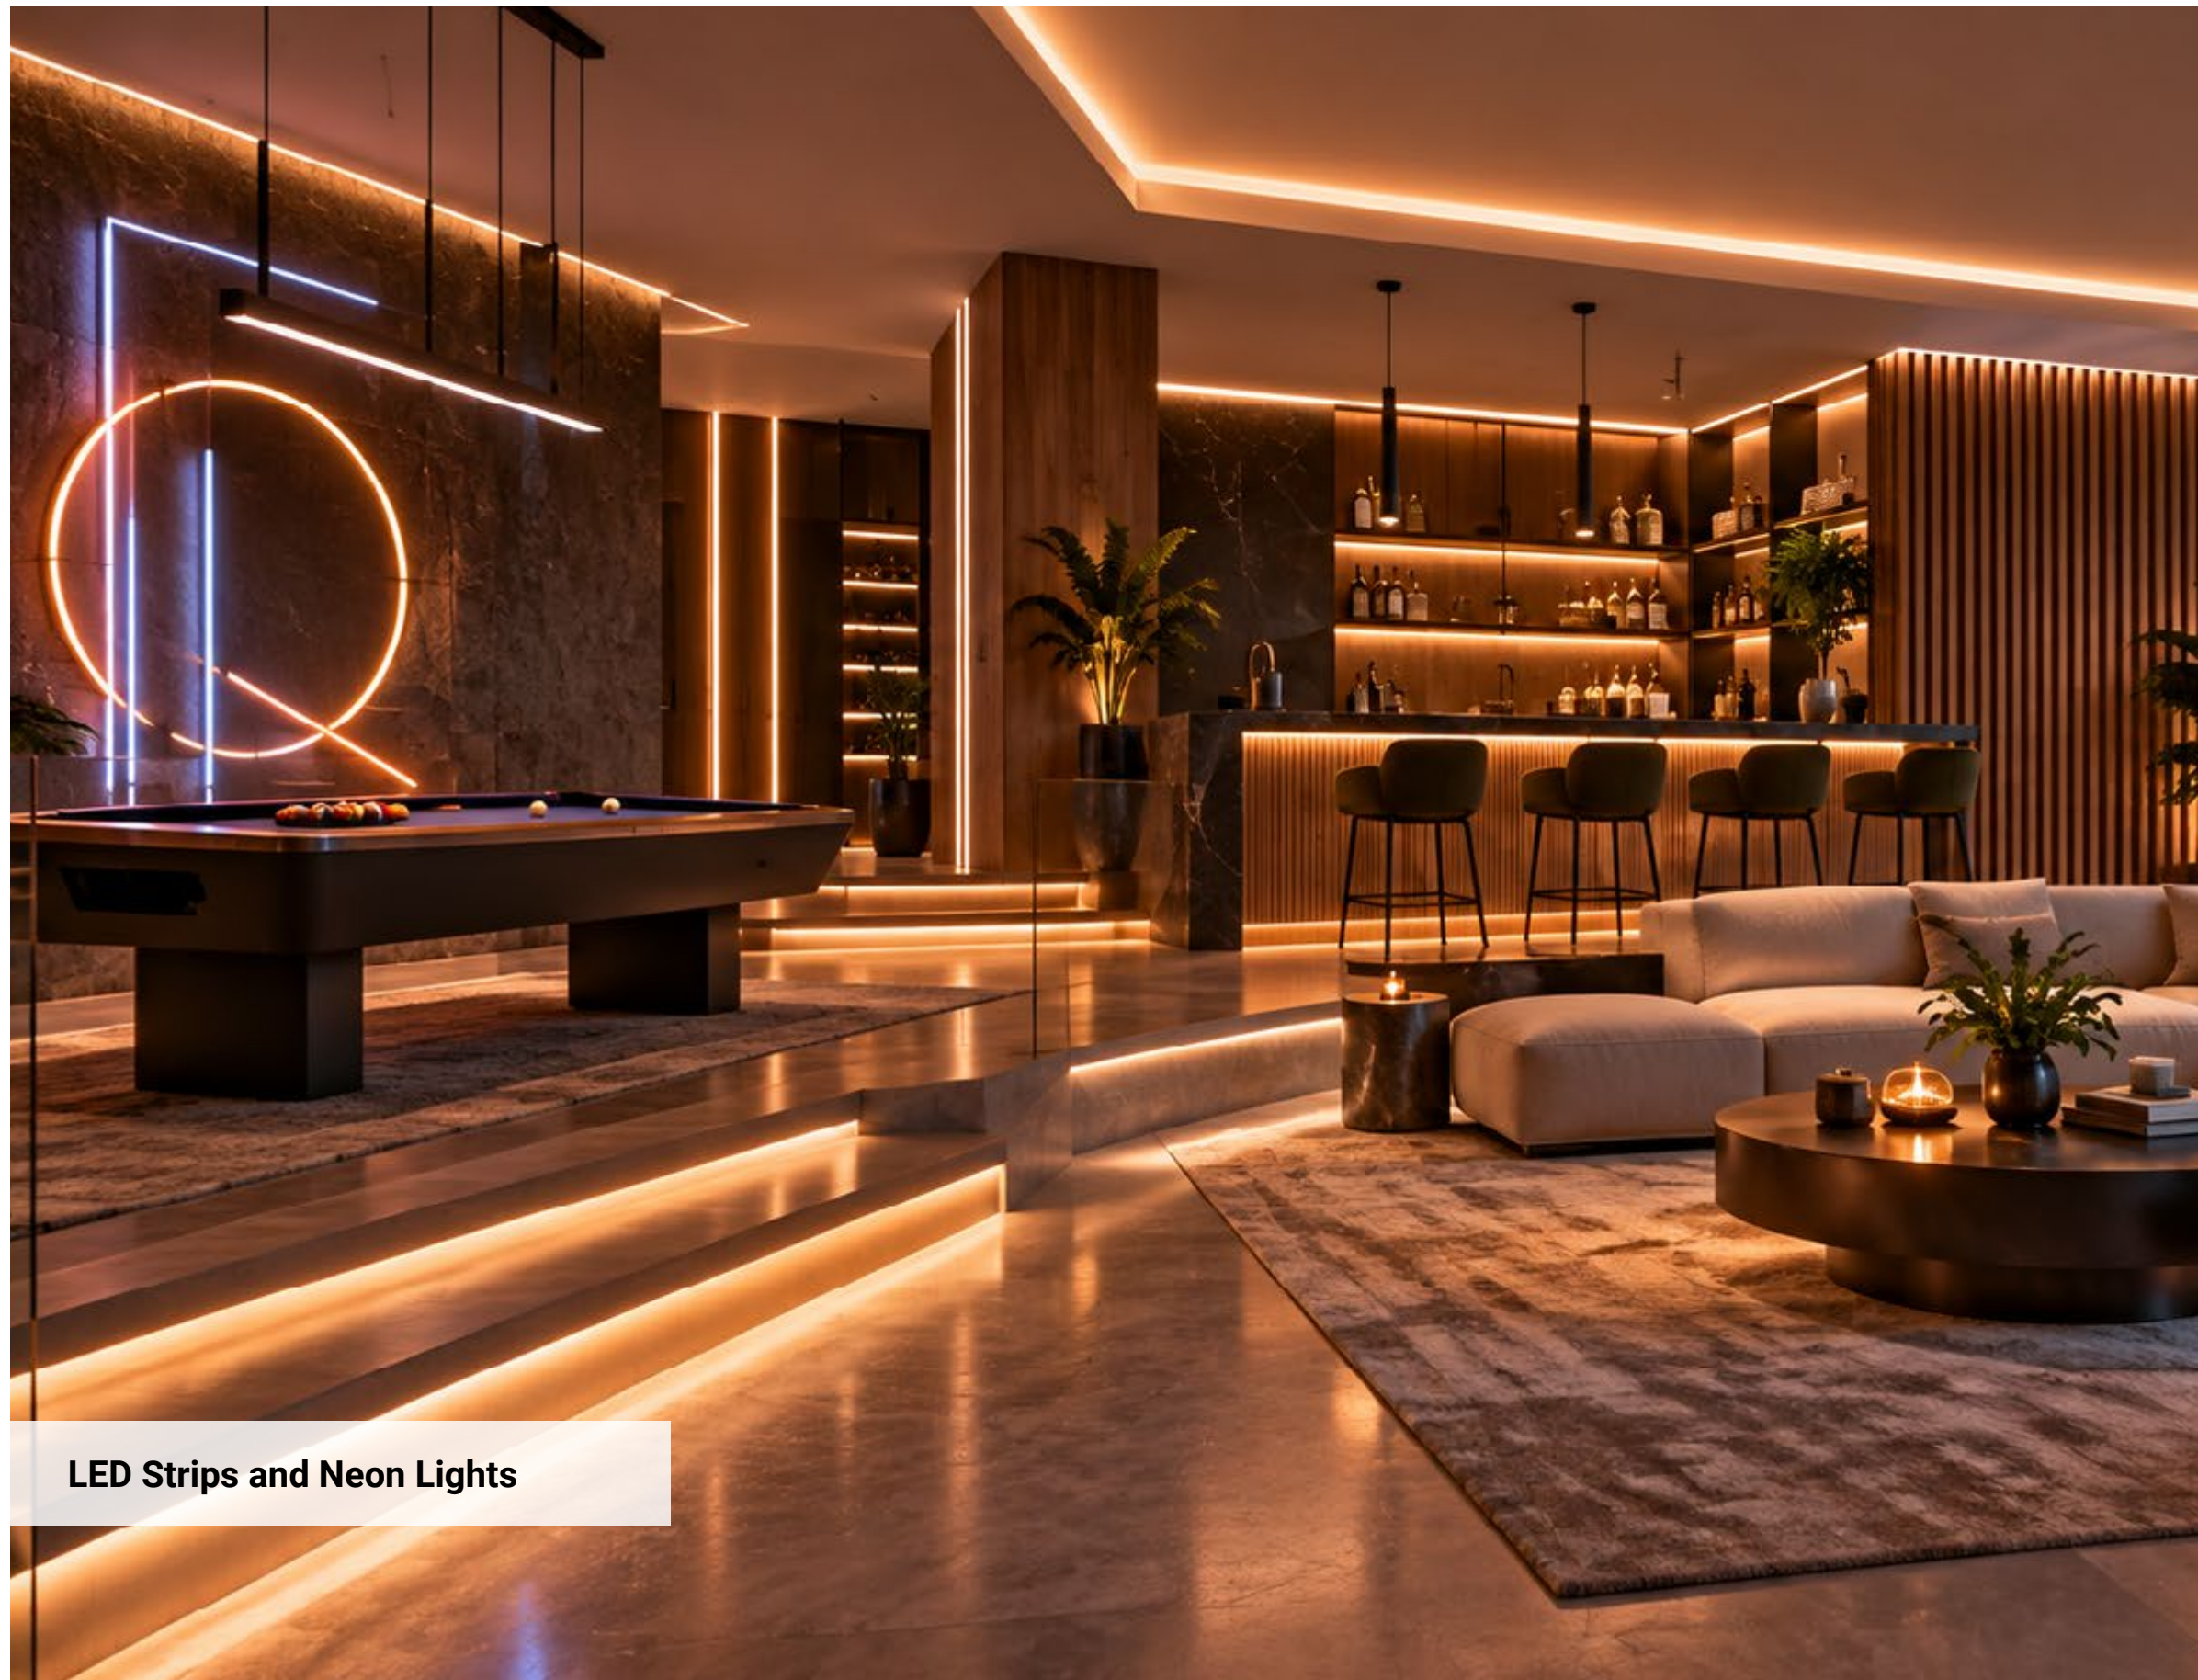

LED Strips and Neon Lights

LED strips offer unmatched flexibility in modern lighting design, making them ideal for creative indoor and outdoor projects. Their adaptability allows for unique shapes, hidden accents, or bold highlights, while accessories and controllers add even more possibilities. Whether used as core illumination or atmospheric mood lighting, LED strips are the go-to choice for designers and professionals alike.

Features:

- Up to 80% energy savings compared to traditional lighting
- Highly flexible and durable construction
- Wide range of colours – from single tone to RGB and RGBW
- Multiple IP ratings for indoor or outdoor use
- Dimmable options with smart control compatibility
- Range of accessories for seamless installation and customization

Applications:

- Accent, hidden, or ambient lighting in homes and offices
- Decorative highlights in retail, restaurants, and hotels
- Creative architectural lighting with abstract shapes and forms
- Outdoor projects – facades, gardens, pathways, and signage



LED STRIP 2835 60 LEDs					
4.8W/m - 12V					
Flux / Meter	300lm/m	Beam Angle	120°		
Power / Meter	4.8W/m	CRI	Ra>80		
LED Qty	60SMD/m	IP Rating	IP20		
Input Voltage	DC: 12V	Width	8mm		
Roll Length	5m	Dimmable	Yes		
SKU	4702	4700	4703	4704	4706
Color	6000K	4200K	2700K	RED	BLUE



LED STRIP 2835 60 LEDs					
4.8W/m - 12V - Waterproof					
Flux / Meter	300lm/m	Beam Angle	120°		
Power / Meter	4.8W/m	CRI	Ra>80		
LED Qty	60SMD/m	IP Rating	IP54		
Input Voltage	DC: 12V	Width	8mm		
Roll Length	5m	Dimmable	Yes		
SKU	4732	4731	4733	4734	4735
Color	6000K	4200K	2700K	RED	GREEN



LED STRIP 2835 120 LEDs			
9.6W/m - 12V			
Flux / Meter	600lm/m	Beam Angle	120°
Power / Meter	9.6W/m	CRI	Ra>80
LED Qty	120 SMD/m	IP Rating	IP20
Input Voltage	DC: 12V	Width	8mm
Roll Length	5m	Dimmable	Yes
SKU	4710	4740	4711
Color	6000K	4200K	2700K



LED STRIP 2835 120 LEDs			
9.6W/m - 12V - Waterproof			
Flux / Meter	600lm/m	Beam Angle	120°
Power / Meter	9.6W/m	CRI	Ra>80
LED Qty	120SMD/m	IP Rating	IP54
Input Voltage	DC: 12V	Width	8mm
Roll Length	5m	Dimmable	Yes
SKU	4720	4722	4721
Color	6000K	4200K	3000K



LED STRIP 2835 120 LEDs			
Slim - 9W/m - 12V			
Flux / Meter	900lm/m	Beam Angle	120°
Power / Meter	9W/m	CRI	Ra>80
LED Qty	120SMD/m	IP Rating	IP20
Input Voltage	DC: 12V	Width	5mm
Roll Length	5m	Dimmable	Yes
SKU	4907	4908	4909
Color	6000K	4200K	2700K



LED STRIP S-TYPE 2835 60 LEDs					
7.2W/m - 12V - Bendable					
Flux / Meter	720lm/m	Beam Angle	120°		
Power / Meter	7.2W/m	CRI	Ra>80		
LED Qty	60SMD/m	IP Rating	IP20		
Input Voltage	DC: 12V	Width	6mm		
Roll Length	5m	Dimmable	Yes		
SKU	4541	4546	4542	4543	4545
Color	7000K	4500K	3000K	RED	GREEN



LED STRIP 2835 204 LEDs			
16.5W/m - 12V			
Flux / Meter	1700lm/m	Beam Angle	120°
Power / Meter	16.5W/m	CRI	Ra>80
LED Qty	204SMD/m	IP Rating	IP20
Input Voltage	DC: 12V	Width	10mm
Roll Length	5m	Dimmable	Yes
SKU	4761	4762	4763
Color	6000K	4200K	2700K



LED STRIP S-TYPE 2835 60 LEDs					
7.2W/m - 12V - Bendable - Waterproof					
Flux / Meter	720lm/m	Beam Angle	120°		
Power / Meter	7.2W/m	CRI	Ra>80		
LED Qty	60SMD/m	IP Rating	IP65		
Input Voltage	DC: 12V	Width	6mm		
Roll Length	5m	Dimmable	Yes		
SKU	4551	4552	4553	4555	4554
Color	7000K	3000K	RED	GREEN	BLUE



LED STRIP 4040 60 LEDs			
10W/m - 12V - Waterproof			
Flux / Meter	650lm/m	Beam Angle	120°
Power / Meter	10W/m	CRI	Ra>80
LED Qty	60SMD/m	IP Rating	IP44
Input Voltage	DC: 12V	Width	10mm
Roll Length	5m	Dimmable	Yes
SKU	4921	4922	4923
Color	6000K	4500K	2700K



LED STRIP 5050 30 LEDs			
7.2W/m - 12V -			
Flux / Meter	500lm/m	Beam Angle	120°
Power / Meter	7.2W/m	CRI	Ra>80
LED Qty	30SMD/m	IP Rating	IP20
Input Voltage	DC: 12V	Width	10mm
Roll Length	5m	Dimmable	Yes
SKU	4801	4800	4802
Color	6000K	4500K	2700K
			GREEN



LED STRIP 5630 60 LEDs			
8.5W/m - 12V			
Flux / Meter	1000lm/m	Beam Angle	120°
Power / Meter	12W/m	CRI	Ra>80
LED Qty	120SMD/m	IP Rating	IP20
Input Voltage	DC: 12V	Width	10mm
Roll Length	5m	Dimmable	Yes
SKU	4911	4913	4912
Color	6000K	4500K	2700K



LED STRIP 5050 60 LEDs			
14.4W/m - 12V			
Flux / Meter	1000lm/m	Beam Angle	120°
Power / Meter	14.4W/m	CRI	Ra>80
LED Qty	60SMD/m	IP Rating	IP20
Input Voltage	DC: 12V	Width	8mm
Roll Length	5m	Dimmable	Yes
SKU	4807	4827	4808
Color	6000K	4500K	2700K
			RED
			BLUE



LED STRIP 3014 120 LEDs			
12W/m - 12V			
Flux / Meter	1000lm/m	Beam Angle	120°
Power / Meter	12W/m	CRI	Ra>80
LED Qty	120SMD/m	IP Rating	IP20
Input Voltage	DC: 12V	Width	8mm
Roll Length	5m	Dimmable	Yes
SKU	4901	4903	4902
Color	6000K	4500K	2700K



LED STRIP 5050 30 LEDs			
7.2W/m - 12V - Waterproof			
Flux / Meter	500lm/m	Beam Angle	120°
Power / Meter	7.2W/m	CRI	Ra>80
LED Qty	30SMD/m	IP Rating	IP54
Input Voltage	DC: 12V	Width	10mm
Roll Length	5m	Dimmable	Yes
SKU	4809	4811	4810
Color	6000K	4500K	2700K



LED STRIP 4014 120 LEDs			
12W/m - 12V			
Flux / Meter	1000lm/m	Beam Angle	120°
Power / Meter	12W/m	CRI	Ra>80
LED Qty	120SMD/m	IP Rating	IP20
Input Voltage	DC: 12V	Width	8mm
Roll Length	5m	Dimmable	Yes
SKU	4904	4905	4906
Color	6000K	4500K	2700K



LED STRIP 5050 60 LEDs			
14.4W/m - 12V - Waterproof			
Flux / Meter	1000lm/m	Beam Angle	120°
Power / Meter	14.4W/m	CRI	Ra>80
LED Qty	60SMD/m	IP Rating	IP54
Input Voltage	DC: 12V	Width	10mm
Roll Length	5m	Dimmable	Yes
SKU	4839	4841	4840
Color	6000K	4500K	2700K
			RED
			BLUE



LED STRIP 2835 120 LEDs			
9W/m - 24V			
Flux / Meter	1000lm/m	Beam Angle	120°
Power / Meter	9W/m	CRI	Ra>80
LED Qty	120SMD/m	IP Rating	IP20
Input Voltage	DC: 24V	Width	8mm
Roll Length	20m	Dimmable	Yes
SKU	4865	4866	4867
Color	6000K	4500K	3000K



LED STRIP 2835 238 LEDs			
18W/m - 24V			
Flux / Meter	2340lm/m	Beam Angle	120°
Power / Meter	18W/m	CRI	Ra>80
LED Qty	238SMD/m	IP Rating	IP20
Input Voltage	DC: 24V	Width	8mm
Roll Length	5m	Dimmable	Yes
SKU	4877	4878	4879
Color	6000K	4000K	3000K



LED STRIP 2835 120 LEDs			
9.6W/m - 24V			
Flux / Meter	1200lm/m	Beam Angle	120°
Power / Meter	9.6W/m	CRI	Ra>80
LED Qty	120SMD/m	IP Rating	IP20
Input Voltage	DC: 24V	Width	8mm
Roll Length	5m	Dimmable	Yes
SKU	4856	4857	4858
Color	6000K	4500K	2700K



LED STRIP 5050 60 LEDs			
14.4W/m - 24V			
Flux / Meter	600lm/m	Beam Angle	120°
Power / Meter	14.4W/m	CRI	Ra>80
LED Qty	60SMD/m	IP Rating	IP20
Input Voltage	DC: 24V	Width	10mm
Roll Length	5m	Dimmable	Yes
SKU	4851	4850	4852
Color	6000K	4200K	2700K



LED STRIP 2835 126 LEDs			
10W/m - 24V			
Flux / Meter	1300lm/m	Beam Angle	120°
Power / Meter	10W/m	CRI	Ra>80
LED Qty	126SMD/m	IP Rating	IP20
Input Voltage	DC: 24V	Width	8mm
Roll Length	5m	Dimmable	Yes
SKU	4871	4872	4873
Color	6000K	4000K	3000K



LED STRIP 5050 60 LEDs			
14.4W/m - 24V - Waterproof			
Flux / Meter	600lm/m	Beam Angle	120°
Power / Meter	14.4W/m	CRI	Ra>80
LED Qty	60SMD/m	IP Rating	IP54
Input Voltage	DC: 24V	Width	10mm
Roll Length	5m	Dimmable	Yes
SKU	4853	4854	4855
Color	6000K	4200K	2700K



LED STRIP 2835 182 LEDs			
14W/m - 24V			
Flux / Meter	1820lm/m	Beam Angle	120°
Power / Meter	14W/m	CRI	Ra>80
LED Qty	182SMD/m	IP Rating	IP20
Input Voltage	DC: 24V	Width	8mm
Roll Length	5m	Dimmable	Yes
SKU	4874	4875	4876
Color	6000K	4000K	3000K




LED STRIP COB 640 LEDs			
12W/m - 24V - RGB			
Flux / Meter	500lm/m	Beam Angle	120°
Power / Meter	12W/m	CRI	Ra>80
LED Qty	640SMD/m	IP Rating	IP20
Input Voltage	DC: 24V	Width	12mm
Roll Length	5m	Dimmable	Yes
SKU	4950		
Color	RGB+6000K		



LED STRIP COB 480 LEDs			
12W/m - 12V - Slim			
Flux / Meter	1200lm/m	Beam Angle	120°
Power / Meter	12W/m	CRI	Ra>80
LED Qty	480SMD/m	IP Rating	IP20
Input Voltage	DC: 12V	Width	8mm
Roll Length	5m	Dimmable	Yes
SKU	4976	4975	4974
Color	6000K	4000K	2700K



LED STRIP COB 512 LEDs			
12W/m - 24V			
Flux / Meter	1100lm/m	Beam Angle	120°
Power / Meter	12W/m	CRI	Ra>90
LED Qty	512SMD/m	IP Rating	IP20
Input Voltage	DC: 24V	Width	8mm
Roll Length	25m	Dimmable	Yes
SKU	4990	4991	4992
Color	6000K	4000K	3000K

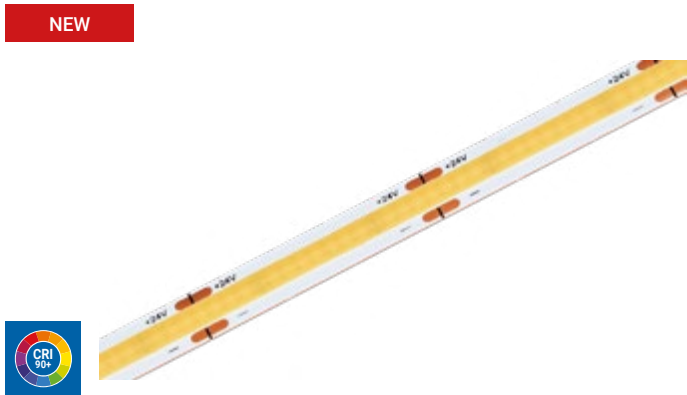

LED STRIP COB 528 LEDs			
14.4W/m - 24V			
Flux / Meter	1800lm/m	Beam Angle	120°
Power / Meter	14.4W/m	CRI	Ra>90
LED Qty	528SMD/m	IP Rating	IP20
Input Voltage	DC: 24V	Width	10mm
Roll Length	5m	Dimmable	Yes
SKU	4981	4982	4983
Color	6000K	4000K	3000K



LED STRIP COB 512 LEDs			
12W/m - 24V			
Flux / Meter	1100lm/m	Beam Angle	120°
Power / Meter	12W/m	CRI	Ra>90
LED Qty	512SMD/m	IP Rating	IP20
Input Voltage	DC: 24V	Width	8mm
Roll Length	50m	Dimmable	Yes
SKU	4993	4994	4995
Color	6000K	4000K	3000K



LED STRIP COB 320 LEDs			
10W/m - 24V			
Flux / Meter	900lm/m	Beam Angle	120°
Power / Meter	10W/m	CRI	Ra>90
LED Qty	320SMD/m	IP Rating	IP20
Input Voltage	DC: 24V	Width	8mm
Roll Length	25m	Dimmable	Yes
SKU	4984	4985	4986
Color	6000K	4000K	3000K



LED STRIP COB 480 LEDs			
12W/m - 24V - Free Cut			
Flux / Meter	900lm/m	Beam Angle	120°
Power / Meter	12W/m	CRI	Ra>80
LED Qty	480SMD/m	IP Rating	IP20
Input Voltage	DC: 24V	Width	8mm
Roll Length	25m	Dimmable	Yes
SKU	4996	4997	4998
Color	6000K	4000K	3000K



LED STRIP COB 320 LEDs			
10W/m - 24V			
Flux / Meter	900lm/m	Beam Angle	120°
Power / Meter	10W/m	CRI	Ra>90
LED Qty	320SMD/m	IP Rating	IP20
Input Voltage	DC: 24V	Width	10mm
Roll Length	50m	Dimmable	Yes
SKU	4987	4988	4989
Color	6000K	4000K	3000K



LED STRIP COB RGB 576 LEDs			
14W/m - 24V - Waterproof			
Flux / Meter	900lm/m	Beam Angle	120°
Power / Meter	14W/m	CRI	Ra>80
LED Qty	576SMD/m	IP Rating	IP65
Input Voltage	DC: 24V	Width	12mm
Roll Length	5m	Dimmable	Yes
SKU	4968	6578	
Color	RGB	FIX CLIP WITH SCREW	



LED STRIP COB 320 LEDs			
10W/m - 24V			
Flux / Meter	900lm/m	Beam Angle	180°
Power / Meter	10W/m	CRI	Ra>90
LED Qty	320SMD/m	IP Rating	IP20
Input Voltage	DC: 24V	Width	8mm
Roll Length	5m	Dimmable	Yes
SKU	4941	4942	4943
Color	6000K	4000K	3000K



LED STRIP COB 320 LEDs			
10W/m - 24V - D Shape			
Flux / Meter	900lm/m	Beam Angle	120°
Power / Meter	10W/m	CRI	Ra>80
LED Qty	320SMD/m	IP Rating	IP65
Input Voltage	DC: 24V	Width	10x4mm
Roll Length	5m	Dimmable	Yes
SKU	4947	4948	4949
Color	6000K	4500K	3000K
FIX CLIP WITH SCREW			



LED STRIP COB 512 LEDs			
12W/m - 24V			
Flux / Meter	1100lm/m	Beam Angle	180°
Power / Meter	12W/m	CRI	Ra>90
LED Qty	512SMD/m	IP Rating	IP20
Input Voltage	DC: 24V	Width	8mm
Roll Length	5m	Dimmable	Yes
SKU	4944	4945	4946
Color	6000K	4000K	3000K




LED STRIP COB 504 LEDs			
6W/m - 48V - Milky			
Flux / Meter	500lm/m	Beam Angle	120°
Power / Meter	6W/m	CRI	Ra>80
LED Qty	504SMD/m	IP Rating	IP67
Input Voltage	DC: 48V	Width	10mm
Roll Length	20m	Dimmable	Yes
SKU	4937	4938	4939
Color	6000K	4500K	3000K
FIX CLIP WITH SCREW			



LED STRIP COB 320 LEDs			
10W/m - 24V - Slim			
Flux / Meter	1000lm/m	Beam Angle	120°
Power / Meter	10W/m	CRI	Ra>80
LED Qty	320SMD/m	IP Rating	IP20
Input Voltage	DC: 24V	Width	5mm
Roll Length	5m	Dimmable	Yes
SKU	4931	4932	4933
Color	6000K	4000K	3000K




LED STRIP COB 624 LEDs			
7+7W/m - 24V			
Flux / Meter	700lm/m	Beam Angle	120°
Power / Meter	7+7W/m	CRI	Ra>80
LED Qty	624SMD/m	IP Rating	IP20
Input Voltage	DC: 24V	Width	10mm
Roll Length	5m	Dimmable	Yes
SKU	4961		
Color	CCT		

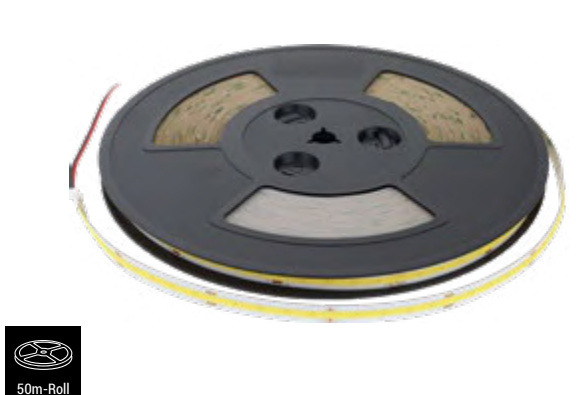

LED STRIP COB 504 LEDs			
6W/m - 48V			
Flux / Meter	630lm/m	Beam Angle	120°
Power / Meter	6W/m	CRI	Ra>80
LED Qty	504SMD/m	IP Rating	IP20
Input Voltage	DC: 48V	Width	10mm
Roll Length	50m	Dimmable	Yes
SKU	4934	4935	4936
Color	6000K	4500K	3000K



LED STRIP COB 640 LEDs			
8+8W/m - 24V			
Flux / Meter	650lm/m	Beam Angle	120°
Power / Meter	8+8W/m	CRI	Ra>80
LED Qty	640SMD/m	IP Rating	IP20
Input Voltage	DC: 24V	Width	10mm
Roll Length	5m	Dimmable	Yes
SKU	4960		
Color	CCT		

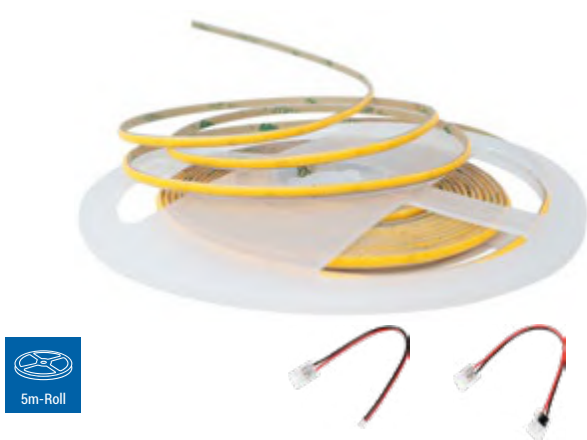

LED STRIP COB SLIM				
7W/m - 24V				
Flux / Meter	700lm/m	Beam Angle	120°	
Power / Meter	7W/m	CRI	Ra>80	
LED Qty	384SMD/m	IP Rating	IP20	
Input Voltage	DC: 24V	Width	3mm	
Roll Length	5m	Dimmable	Yes	
SKU	4962	4963	4964	6595
Color	6000K	4500K	3000K	CONNECTOR WITH WIRE
				2WAY-CONNECTOR WITH WIRE



LED STRIP COB SUPER WIDE			
28W/m - 24V			
Flux / Meter	2800lm/m	Beam Angle	120°
Power / Meter	28W/m	CRI	Ra>80
LED Qty	960SMD/m	IP Rating	IP20
Input Voltage	DC: 24V	Width	20mm
Roll Length	5m	Dimmable	Yes
SKU	4966		
Color	3000K		



LED STRIP COB RGB			
14W/m - 24V			
Flux / Meter	1000lm/m	Beam Angle	120°
Power / Meter	14W/m	CRI	Ra>80
LED Qty	576SMD/m	IP Rating	IP20
Input Voltage	DC: 24V	Width	10mm
Roll Length	5m	Dimmable	Yes
SKU	4965		
Color	RGB		



LED STRIP COB MAGIC RGB			
Digital -16W/m - 24V			
Flux / Meter	1100lm/m	Beam Angle	120°
Power / Meter	16W/m	CRI	Ra>80
LED Qty	576COB/m	IP Rating	IP20
Input Voltage	DC: 24V	Width	10mm
Roll Length	5m	Dimmable	Yes
SKU	4578		
Color	RGB		

Accessories

For COB Strips

SKU 6622	SKU 6577	SKU 6623	SKU 6624
MIDDLE CONNECTOR 8mm	COB FASTEN ANGLE CONNECTOR 8mm	ONE END CONNECTOR WITH WIRE 8mm	TWO END CONNECTOR WITH WIRE 8mm
SKU 6531	SKU 6532	SKU 6533	SKU 6534
COB FASTEN CONNECTOR 5mm	COB FASTEN ANGLE CONNECTOR 5mm	COB FASTEN CONNECTOR WITH WIRE 5mm	TWO END COB FASTEN CONNECTOR WITH WIRE 5mm
SKU 6535	SKU 6536	SKU 6537	SKU 6538
COB FASTEN CONNECTOR 10mm	COB FASTEN ANGLE CONNECTOR 10mm	COB FASTEN CONNECTOR WITH WIRE 10mm	TWO END COB FASTEN CONNECTOR WITH WIRE 10mm
SKU 6597	SKU 6600	SKU 6598	SKU 6599
COB RGB FASTEN CONNECTOR 10mm	COB RGB FASTEN ANGLE CONNECTOR 10mm	COB RGB FASTEN CONNECTOR WITH WIRE 10mm	TWO END COB RGB FASTEN CONNECTOR WITH WIRE 10mm
SKU 6584	SKU 6587	SKU 6585	SKU 6586
COB MAGIC RGB FASTEN CONNECTOR 10mm	COB FASTEN ANGLE CONNECTOR 10mm - MAGIC RGB	COB FASTEN CONNECTOR WITH WIRE 10mm- MAGIC RGB	TWO END COB FASTEN CONNECTOR WITH WIRE 10mm - - MAGIC RGB



LED STRIP 2835 196 LEDs			
PREMIUM LINE			
20W/m - 12V			
Flux / Meter	2100lm/m	Beam Angle	120°
Power / Meter	20W/m	CRI	Ra>80
LED Qty	195SMD/m	IP Rating	IP20
Input Voltage	DC:12V	Width	12mm
Roll Length	5m	Dimmable	Yes
SKU	4424	4425	4426
Color	6000K	4200K	2800K



LED STRIP 5054 60 LEDs			
PREMIUM LINE			
16W/m - 24V			
Flux / Meter	1100lm/m	Beam Angle	120°
Power / Meter	16W/m	CRI	Ra>80
LED Qty	60SMD/m	IP Rating	IP20
Input Voltage	DC:24V	Width	12mm
Roll Length	5m	Dimmable	Yes
SKU	4431	4432	4433
Color	6000K	4200K	2800K



LED STRIP 2835 196 LEDs			
PREMIUM LINE			
20W/m - 12V - Waterproof			
Flux / Meter	2100lm/m	Beam Angle	120°
Power / Meter	20W/m	CRI	Ra>80
LED Qty	196SMD/m	IP Rating	IP65
Input Voltage	DC:12V	Width	12mm
Roll Length	5m	Dimmable	Yes
SKU	4454	4455	4456
Color	6000K	4200K	2800K



LED STRIP 5054 60 LEDs			
PREMIUM LINE			
16W/m - 24V - Waterproof			
Flux / Meter	1100lm/m	Beam Angle	120°
Power / Meter	16W/m	CRI	Ra>80
LED Qty	60SMD/m	IP Rating	IP65
Input Voltage	DC:24V	Width	12mm
Roll Length	5m	Dimmable	Yes
SKU	4461	4462	4463
Color	6000K	4200K	2800K



LED STRIP 2835 196 LEDs			
PREMIUM LINE			
20W/m - 24V			
Flux / Meter	2100lm/m	Beam Angle	120°
Power / Meter	20W/m	CRI	Ra>80
LED Qty	196SMD/m	IP Rating	IP20
Input Voltage	DC:24V	Width	12mm
Roll Length	5m	Dimmable	Yes
SKU	4421	4422	4423
Color	6000K	4200K	2800K



LED STRIP 5025 60 LEDs			
PREMIUM LINE			
16W/m - 24V - CCT			
Flux / Meter	800lm/m	Beam Angle	120°
Power / Meter	16W/m	CRI	Ra>80
LED Qty	60SMD/m	IP Rating	IP20 ; 65
Input Voltage	DC:24V	Width	10mm
Roll Length	5m	Dimmable	Yes
SKU	4441	4471	
Color	CCT	CCT	



LED STRIP 2835 196 LEDs			
PREMIUM LINE			
20W/m - 24V - Waterproof			
Flux / Meter	2100lm/m	Beam Angle	120°
Power / Meter	20W/m	CRI	Ra>80
LED Qty	196SMD/m	IP Rating	IP65
Input Voltage	DC:24V	Width	12mm
Roll Length	5m	Dimmable	Yes
SKU	4451	4452	4453
Color	6000K	4200K	2800K



LED STRIP 5050 60 LEDs			
PREMIUM LINE			
9.5W/m - 24V - RGB+CCT			
Flux / Meter	950lm/m	Beam Angle	120°
Power / Meter	9.5W/m	CRI	Ra>80
LED Qty	60SMD/m	IP Rating	IP20
Input Voltage	DC:24V	Width	12mm
Roll Length	5m	Dimmable	Yes
SKU	4480		
Color	RGB+CCT		



LED STRIP 5050 60 LEDs			
PREMIUM LINE			
16W/m - 12V - RGB			
Flux / Meter	1600lm/m	Beam Angle	120°
Power / Meter	16W/m	CRI	Ra>80
LED Qty	60SMD/m	IP Rating	IP20
Input Voltage	DC:12V	Width	12mm
Roll Length	5m	Dimmable	Yes
SKU	4485	4486	
Color	RGB+6000K	RGB+3000K	



LED STRIP 5050 30 LEDs			
7.2W/m - 12V - RGB			
Flux / Meter	500lm/m	Beam Angle	120°
Power / Meter	7.2W/m	CRI	Ra>80
LED Qty	30SMD/m	IP Rating	IP20 ; IP54
Input Voltage	DC: 12V	Width	10mm
Roll Length	5m	Dimmable	Yes
SKU	4311	4315	
Color	RGB	RGB	IP54



LED STRIP 5050 60 LEDs			
PREMIUM LINE			
16W/m - 12V - RGB - Waterproof			
Flux / Meter	1600lm/m	Beam Angle	120°
Power / Meter	16W/m	CRI	Ra>80
LED Qty	60SMD/m	IP Rating	IP65
Input Voltage	DC:12V	Width	12mm
Roll Length	5m	Dimmable	Yes
SKU	4487	4488	
Color	RGB+6000K	RGB+3000K	



LED STRIP 5050 60 LEDs			
14.4W/m - 12V - RGB			
Flux / Meter	1000lm/m	Beam Angle	120°
Power / Meter	14.4W/m	CRI	Ra>80
LED Qty	60SMD/m	IP Rating	IP20 ; IP54
Input Voltage	DC: 12V	Width	10mm
Roll Length	5m	Dimmable	Yes
SKU	4312	4316	
Color	RGB	RGB	IP54



LED STRIP 5050 60 LEDs			
PREMIUM LINE			
16W/m - 24V - RGB			
Flux / Meter	1600lm/m	Beam Angle	120°
Power / Meter	16W/m	CRI	Ra>80
LED Qty	60SMD/m	IP Rating	IP20
Input Voltage	DC:24V	Width	12mm
Roll Length	5m	Dimmable	Yes
SKU	4481	4482	
Color	RGB+6000K	RGB+3000K	



LED STRIP 5050 60 LEDs			
14.4W/m - 12V - RGB			
Flux / Meter	1000lm/m	Beam Angle	120°
Power / Meter	14.4W/m	CRI	Ra>80
LED Qty	60SMD/m	IP Rating	IP20
Input Voltage	DC: 12V	Width	10mm
Roll Length	5m	Dimmable	Yes
SKU	4313	4314	
Color	RGB+6000K	RGB+3000K	



LED STRIP 5050 60 LEDs			
PREMIUM LINE			
16W/m - 24V - RGB - Waterproof			
Flux / Meter	1600lm/m	Beam Angle	120°
Power / Meter	16W/m	CRI	Ra>80
LED Qty	60SMD/m	IP Rating	IP65
Input Voltage	DC:24V	Width	12mm
Roll Length	5m	Dimmable	Yes
SKU	4483	4484	
Color	RGB+6000K	RGB+3000K	



LED STRIP 5050 60 LEDs			
14.4W/m - 24V - RGB			
Flux / Meter	1000lm/m	Beam Angle	120°
Power / Meter	14.4W/m	CRI	Ra>80
LED Qty	60SMD/m	IP Rating	IP20 ; IP54
Input Voltage	DC: 24V	Width	10mm
Roll Length	5m	Dimmable	Yes
SKU	4861	4862	
Color	RGB	RGB	IP54



LED SMD Digital Strip

PREMIUM LINE

Addressable

Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	Yes

SKU	Watt/Meter	Flux/Meter	LED Qty	Color	Pixels	Voltage
-----	------------	------------	---------	-------	--------	---------

4490	7W/m	550lm/m	30SMD/m	RGB	10Pixels	DC:12V
------	------	---------	---------	-----	----------	--------

4491	8W/m	600lm/m	30SMD/m	RGB	30Pixels	DC:5V
------	------	---------	---------	-----	----------	-------

4492	16W/m	1200lm/m	60SMD/m	RGB	30Pixels	DC:5V
------	-------	----------	---------	-----	----------	-------

4493	12W/m	1200lm/m	60SMD/m	WWA	60Pixels	DC:5V
------	-------	----------	---------	-----	----------	-------



LED SMD STIPS 2216 ; 2110

PREMIUM LINE

High Power - 24V

Input Voltage	DC: 24V
Beam Angle	120°
CRI	Ra>90
IP Rating	IP20
Dimmable	Yes

SKU	Watt/Meter	Flux/Meter	LED Qty	Color	Width
-----	------------	------------	---------	-------	-------

4403	22W/m	1900lm/m	240SMD/m	3000K	10mm
------	-------	----------	----------	-------	------

4404	24W/m	2200lm/m	300SMD/m	3000K	10mm
------	-------	----------	----------	-------	------

4405	32W/m	2500lm/m	560SMD/m	3000K	12mm
------	-------	----------	----------	-------	------

4406	38W/m	3400lm/m	700SMD/m	3000K	12mm
------	-------	----------	----------	-------	------



LED STRIP COB RUNNING WATER EFFECT

PREMIUM LINE

SET(ADAPTER+CONTROLLER) - 24V

Flux / Meter	720lm/m	Beam Angle	120°
Power / Meter	8W/m	CRI	Ra>80
LED Qty	360SMD/m	IP Rating	IP43
Input Voltage	DC: 24V	Width	20mm
Roll Length	5m	Dimmable	Yes

SKU	4415	4416	
Color	4000K	3000K	



LED STRIP SMD2835 RUNNING WATER EFFECT

PREMIUM LINE

SET(ADAPTER+CONTROLLER) - 12V

Flux / Meter	432lm/m	Beam Angle	120°
Power / Meter	4.8W/m	CRI	Ra>80
LED Qty	126SMD/m	IP Rating	IP65
Input Voltage	DC: 12V	Width	8mm
Roll Length	5m	Dimmable	Yes

SKU	4417	4418	
Color	4000K	3000K	



LED STRIP SMD2835 RUNNING WATER EFFECT

PREMIUM LINE

120LED/m - 24V

Flux / Meter	950lm/m	Beam Angle	120°
Power / Meter	10W/m	CRI	Ra>80
LED Qty	120SMD/m	IP Rating	IP65
Input Voltage	DC: 24V	Width	8mm
Roll Length	10m	Dimmable	Yes

SKU	4940		
Color	4500K		



NEW



SPI - IC:SW2811

LED STRIP COB 360 LEDs RUNNING WATER EFFECT

11W/m - 24V

Flux / Meter	900lm/m	Beam Angle	120°
Power / Meter	11W/m	CRI	Ra>80
LED Qty	360SMD/m	IP Rating	IP20
Input Voltage	DC: 24V	Width	10mm
Roll Length	10m	Dimmable	Yes

SKU	4999	6568	
Color	4000K	Female Connectors	



NEW



LED COB STRIPS SET 180LEDs
COB - Slim Controller - USB A Powered

Input Voltage	DC 5V
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	Yes




SKU	Power/m	Flux/m	LED Qty	Color	Roll Lenght
4320	1.5W/m	90lm/m	180SMD/m	3000K	2m

NEW




ACOUSTIC PANEL STRIPS SET
COB - Remote Control - Extension Cable

Input Voltage	DC24V
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	Yes

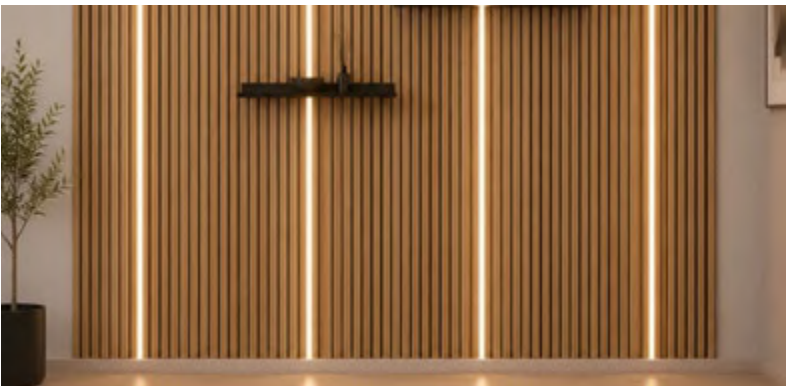

2 Strips Sets x 250cm					
SKU	Watt	Lumen	Lumen/W	Color	Dimension
4331	30W	375lm	100lm/W	3000K	2*13x12x2500mm
4332	30W	375lm	100lm/W	4000K	2*13x12x2500mm
4 Strips Sets x 250cm					
4333	60W	750lm	100lm/W	3000K	4*13x12x2500mm
4334	60W	750lm	100lm/W	4000K	4*13x12x2500mm

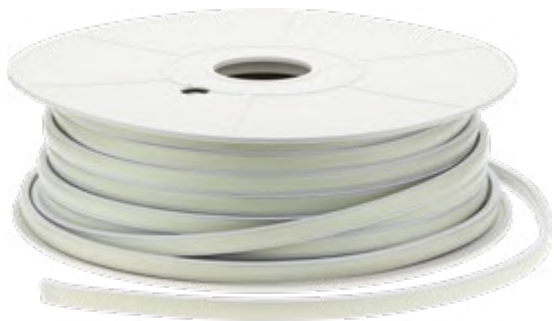

LED COB STRIP - MILKY COVER 220V
288 LED/m - 50cm Cut

Flux / Meter	700lm/m	Beam Angle	120°
Power / Meter	10W/m	CRI	Ra>80
LED Qty	288COB/m	IP Rating	IP65
Input Voltage	AC:220V	Width	12mm
Roll Length	50m	Dimmable	Yes




SKU 6546
INPUT CABLE + CONNECTOR



SKU 6457
FLIX CLIPS



SKU 6548
END CAP FOR COB220V

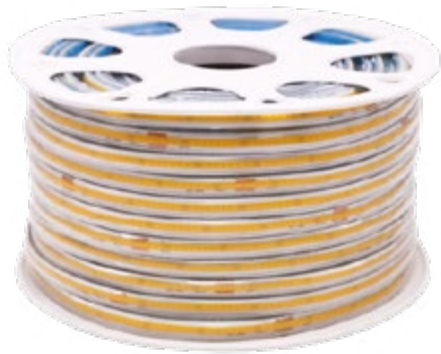

LED COB STRIP - CONNECT-ANYWAY 220V
360 LED/m - 10cm Cut

Flux / Meter	700lm/m	Beam Angle	120°
Power / Meter	10W/m	CRI	Ra>80
LED Qty	288COB/m	IP Rating	IP65
Input Voltage	AC:220V	Width	12mm
Roll Length	50m	Dimmable	Yes



SKU 6592
CONNECT 5mm FOR 220V



SKU 6593
END Cap for COB 220V



LED STRIP 220V
2835 120 SMD/m

Flux / Meter	900lm/m	Beam Angle	120°
Power / Meter	9W/m	CRI	Ra>80
LED Qty	120SMD/m	IP Rating	IP65
Input Voltage	AC:220V	Width	10mm
Roll Length	50m	Dimmable	Yes



SKU	4951	4952	4953
Color	6000K	4500K	3000K



SKU 6543
INPUT CABLE + CONNECTOR



SKU 6544
FLIX CLIPS



SKU 6545
END CAP FOR 2835



SUPER SLIM LED FLEX NEON 24V
SIDE BEND 2835 120 SMD/m

Flux / Meter	400lm/m	Beam Angle	120°
Power / Meter	8W/m	CRI	Ra>80
LED Qty	120SMD/m	IP Rating	IP65
Input Voltage	DC:24V	Dimension	4x8mm
Roll Length	5m	Dimmable	Yes



SKU	4576	4575	4574	6588	6589
Color	6000K	4500K	3000K	End Cap with hole	End Cap



LED FLEX NEON 24V
2835 140 SMD/m

Flux / Meter	300lm/m	Beam Angle	120°
Power / Meter	10W/m	CRI	Ra>80
LED Qty	140SMD/m	IP Rating	IP65
Input Voltage	DC:24V	Dimension	12x20mm
Roll Length	5m	Dimmable	Yes



SKU	4571	4572	4573	6591
Color	6000K	4000K	3000K	Fix clips



LED STRIP 220V
5730 120 SMD/m

Flux / Meter	500lm/m	Beam Angle	120°
Power / Meter	10W/m	CRI	Ra>80
LED Qty	120SMD/m	IP Rating	IP65
Input Voltage	AC:220V	Width	14mm
Roll Length	50m	Dimmable	Yes



SKU	4611	4613	4612
Color	6000K	4000K	2800K



SKU 6631
INPUT CABLE + CONNECTOR+PLUG



SKU 6632
FLIX CLIPS



SKU 6633
MIDDLE CONNECTOR



SKU 6627
END CAP FOR 5730



LED FLEX NEON - MAGIC RGB
5050 72 SMD/m

Flux / Meter	250lm/m	Beam Angle	120°
Power / Meter	9W/m	CRI	Ra>80
LED Qty	72SMD/m	IP Rating	IP65
Input Voltage	DC:24V	Dimension	6x12mm
Roll Length	5m	Dimmable	Yes



SKU	4579	6581
Color	Magic RGB	Fix clips





LED FLEX NEON 12V	
2835 120SMD/m - 25m	
Roll Lenght	25m
Beam Angle	120°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Watt/m	Lumen/m	Voltage	Color	Dimension
4590	6W/m	300lm/m	DC:12V	6000K	18x8 mm
4591	6W/m	300lm/m	DC:12V	4500K	18x8 mm
4592	6W/m	300lm/m	DC:12V	2800K	18x8 mm
4593	6W/m	300lm/m	DC:12V	Blue	18x8 mm
4594	6W/m	300lm/m	DC:12V	Red	18x8 mm
4595	6W/m	300lm/m	DC:12V	Green	18x8 mm
4596	6W/m	300lm/m	DC:12V	Ice Blue	18x8 mm
4597	6W/m	300lm/m	DC:12V	Lemon	18x8 mm
4598	6W/m	300lm/m	DC:12V	Golden	18x8 mm
4599	6W/m	300lm/m	DC:12V	Purple	18x8 mm



LED FLEX NEON 220V	
2835 120SMD/m - 50m	
Roll Lenght	50m
Beam Angle	120°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Watt/m	Lumen/m	Voltage	Color	Dimension
4581	8.5W/m	300lm/m	AC:220V	6000K	16x10 mm
4580	8.5W/m	300lm/m	AC:220V	4000K	16x10 mm
4582	8.5W/m	300lm/m	AC:220V	3000K	16x10 mm
4583	8.5W/m	300lm/m	AC:220V	Blue	16x10 mm
4584	8.5W/m	300lm/m	AC:220V	Red	16x10 mm
4585	8.5W/m	300lm/m	AC:220V	Green	16x10 mm
4586	8.5W/m	300lm/m	AC:220V	Amber	16x10 mm
4587	8.5W/m	300lm/m	AC:220V	Yellow	16x10 mm
4588	8.5W/m	300lm/m	AC:220V	Pink	16x10 mm
4589	8.5W/m	300lm/m	AC:220V	RGB	25x13 mm



SKU 6602
CONNECTOR WITH ONE SIDE WIRE FOR NEON FLEX



SKU 6603
MOUNTING BRACKET FOR NEON FLEX



SKU 6601
ALUMINIUM CLIPS FOR NEON FLEX



SKU 6605
END CAP FOR



SKU 6634
MIDDLE CONNECTOR



SKU 6635
INPUT CABLE + CONNECTOR + PLUG



SKU 6636
ALUMINIUM CHANNEL WITH 2 SCREWS, 5CM SINGLE COLOUR



SKU 6637
END CAP FOR SINGLE COLOUR



SKU 6604
MIDDLE CONNECTOR



SKU 6591
FLIX CLIP FOR NEON




SKU 6638
POWER CABLE+RGB CONTROLLER(PIN CONNECTOR + END CAP)



SKU 6639
ALUMINIUM CHANNEL WITH 2 SCREWS, 5CM RGB



SKU 6640
END CAP FOR RGB

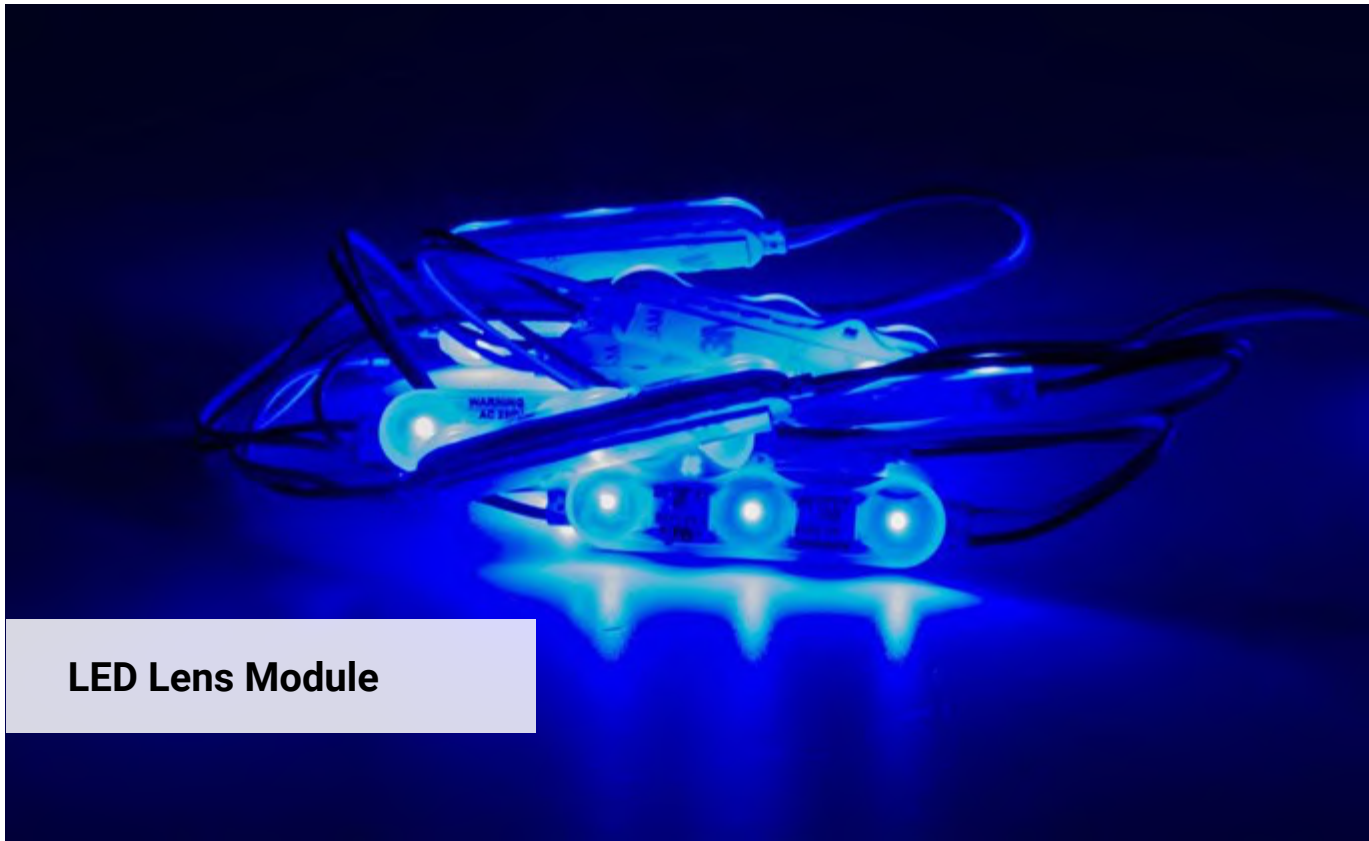

LED Lens Module



LENS LED MODULE 220V			
3x3014 SMD - Waterproof			
Power/Module	1.6W	Beam Angle	160°
Input Voltage	AC 220-240V	CRI	Ra>80
LED Qty	3 Pcs	IP Rating	67
Flux per Watt	70lm/W	Dimension	16x65mm
SKU	4564		
Color	6000K		



LENS LED MODULE RGB			
3x5050 SMD - Waterproof			
Power/Module	0.72W	Beam Angle	160°
Input Voltage	DC 12V	CRI	Ra>80
LED Qty	3 Pcs	IP Rating	65
Flux per Watt	118lm/W	Dimension	70x16x8mm
SKU	4563		
Color	RGB		



LENS LED MODULE						
3x2835 SMD - Waterproof						
Power/Module	0.72W	Beam Angle	120°			
Input Voltage	DC 12V	CRI	Ra>80			
LED Qty	3 Pcs	IP Rating	65			
Flux per Watt	110lm/W	Dimension	58x12mm			
SKU	4512	4511	4513	4514	4516	4515
Color	10000K	7000K	3000K	RED	GREEN	BLUE



LENS LED MODULE				
3x3014 SMD - Waterproof				
Power/Module	0.36W	Beam Angle	120°	
Input Voltage	DC 12V	CRI	Ra>80	
LED Qty	3 Pcs	IP Rating	65	
Flux per Watt	85lm/W	Dimension	18x8x3mm	
SKU	4531	4533	4535	4534
Color	6000K	RED	GREEN	Blue



LENS LED MODULE					
3x2835 SMD - Waterproof					
Power/Module	1.5W	Beam Angle	160°		
Input Voltage	DC 12V	CRI	Ra>80		
LED Qty	3 Pcs	IP Rating	65		
Flux per Watt	80lm/W	Dimension	75x15mm		
SKU	4522	4521	4523	4524	4526
Color	10000K	7000K	3000K	RED	GREEN



LENS LED MODULE			
4x2835 SMD - Waterproof			
Power/Module	2.4W	Beam Angle	160°
Input Voltage	DC 12V	CRI	Ra>80
LED Qty	4 Pcs	IP Rating	65
Flux per Watt	100lm/W	Dimension	43x35x6.5mm
SKU	4561	4562	
Color	6500K	3000K	



LED STRIP SET 12V 5050 30 LEDs			
Adapter + Controller + Remote			
Flux / Meter	240lm/m	Beam Angle	120°
Power / Meter	4W/m	CRI	Ra>80
LED Qty	30SMD/m	IP Rating	IP20
Input Voltage	DC: 12V	Width	10mm
Roll Length	5m	Dimmable	Yes
SKU	4321		
Color	RGB		



SMART LED STRIP SET 12V 5050+2835 60 LEDs			
Adapter + Wifi Controller			
Flux / Meter	240lm/m	Beam Angle	120°
Power / Meter	4W/m	CRI	Ra>80
LED Qty	60SMD/m	IP Rating	IP20
Input Voltage	DC: 12V	Width	10mm
Roll Length	2m	Dimmable	Yes
SKU	4324	4325	
Color	RGB+W	RGB+WW	



LED STRIP SET 12V 5050 60 LEDs			
Adapter + Controller + Remote			
Flux / Meter	480lm/m	Beam Angle	120°
Power / Meter	8W/m	CRI	Ra>80
LED Qty	60SMD/m	IP Rating	IP20 ; IP54
Input Voltage	DC: 12V	Width	10mm
Roll Length	5m	Dimmable	Yes
SKU	4322	4323	
Color	RGB	RGB	



SMART LED STRIP SET 12V 5050+2835 90 LEDs			
Adapter + Wifi Controller			
Flux / Meter	360lm/m	Beam Angle	120°
Power / Meter	6W/m	CRI	Ra>80
LED Qty	90SMD/m	IP Rating	IP20
Input Voltage	DC: 12V	Width	10mm
Roll Length	3m	Dimmable	Yes
SKU	4326		
Color	RGB+CCT		



LED STRIP SET 12V 5050 30 LEDs			
Adapter + Bluetooth + Remote			
Flux / Meter	240lm/m	Beam Angle	120°
Power / Meter	4W/m	CRI	Ra>80
LED Qty	30SMD/m	IP Rating	IP20
Input Voltage	DC: 12V	Width	10mm
Roll Length	5m	Dimmable	Yes
SKU	4328		
Color	RGB		



TV LED Strip 5V 5050+2835 60LEDs - SET			
Wifi Controller + Remote			
Flux / Meter	240lm/m	Beam Angle	120°
Power / Meter	4W/m	CRI	Ra>80
LED Qty	60SMD/m	IP Rating	IP20
Input Voltage	DC: 5V	Width	10mm
Roll Length	2m	Dimmable	Yes
SKU	4327		
Color	RGB+WW		



LED STRIP SET 12V 5050 60 LEDs			
Adapter + Bluetooth + Remote			
Flux / Meter	480lm/m	Beam Angle	120°
Power / Meter	8W/m	CRI	Ra>80
LED Qty	60SMD/m	IP Rating	IP20 ; IP54
Input Voltage	DC: 12V	Width	10mm
Roll Length	5m	Dimmable	Yes
SKU	4329	4330	
Color	RGB	RGB	



SKU6573

10MM 3PIN SMD STRIP
FASTEN CONNECTOR



SKU6574

10MM 4PIN SMD STRIP
FASTEN CONNECTOR



SKU6575

10MM 5PIN SMD STRIP
FASTEN CONNECTOR



SKU6576

12MM 6PIN SMD STRIP
FASTEN CONNECTOR



SKU 6549
2PIN FASTEN CONNECTOR STRIP TO STRIP FOR 8MM COB



SKU 6550
2PIN FASTEN CONNECTOR STRIP TO WIRE FOR 8MM SMD



SKU 6551
2PIN FASTEN CONNECTOR STRIP TO WIRE FOR 8MM COB



SKU 6552
2PIN FASTEN CONNECTOR STRIP TO WIRE FOR 8MM SMD



SKU 6553
2PIN FASTEN DUAL CONNECTOR FOR 8MM COB



SKU 6554
2PIN FASTEN DUAL CONNECTOR FOR 8MM SMD



SKU 6555
3PIN FASTEN CONNECTOR STRIP TO STRIP FOR 10MM 3PIN



SKU 6556
3PIN FASTEN CONNECTOR WITH WIRE FOR 10MM 3PIN



SKU 6557
ASTEN CONNECTOR STRIP TO STRIP FOR 10MM 5PIN SMD STRIP RGBW



SKU 6558
FASTEN DUAL CONNECTOR FOR 10MM 5PIN SMD STRIP RGBW



SKU 6559
CLAMP PRESS CONNECTOR STRIP TO STRIP FOR 12MM 6PIN SMD STRIP



SKU 6560
CLAMP PRESS DUAL CONNECTOR FOR 12MM 6PIN SMD STRIP



SKU 6561
WATERPROOF CONNECTOR 15CM 2WIRE SMD 10MM PCB 2PIN



SKU 6562
DOUBLE WATERPROOF CONNECTOR 15CM 2WIRE SMD 10MM PCB 2 PIN



SKU 6563
WATERPROOF CONNECTOR SMD 10MM PCB 3PIN (CCT, MAGIC RGB)



SKU 6564
WATERPROOF CONNECTOR WITH 15CM 3WIRE SMD 10MM PCB 3PIN (CCT, MAGIC RGB)



SKU 6565
WATERPROOF CONNECTOR WITH 15CM 4WIRE SMD 10MM PCB 4PIN(RGB)



SKU 6566
WATERPROOF CONNECTOR WITH 15CM 5WIRE SMD 10MM PCB 5PIN(RGBW)



SKU 6617
FLEXIBLE CONNECTOR FOR RGB LED STRIP



SKU 6517
4PINS MALE IN WHITE FOR RGB LED STRIP



SKU 5151
CONNECTOR FOR LED STRIP 3528



SKU 5152
CONNECTOR FOR LED STRIP 5050



SKU 6606
CONNECTOR FOR LED STRIP RGBW



SKU 6607
CONNECTOR FOR LED STRIP RGBW - ANGLE



SKU 6608
CONNECTOR FOR LED STRIP RGB



SKU 6619
ANGLE CONNECTOR FOR LED STRIP 3528 8mm



SKU 6620
ANGLE CONNECTOR FOR LED STRIP 5050 10mm



SKU 6621
ANGLE CONNECTOR FOR LED STRIP RGB 10mm



SKU 6610
CONNECTOR FOR LED STRIP DC MALE



SKU 6611
CONNECTOR FOR LED STRIP DC FEMALE



SKU 6612
FLEXIBLE CONNECTOR FOR LED STRIP 3528 DC FEMALE



SKU 6613
FLEXIBLE CONNECTOR FOR LED STRIP 5050 DC FEMALE



SKU 6614
FLEXIBLE CONNECTOR FOR LED STRIP RGB



SKU 6615
FLEXIBLE CONNECTOR FOR LED STRIP 3528



SKU 6616
FLEXIBLE CONNECTOR FOR LED STRIP 5050



SKU 6618
FLEXIBLE CONNECTOR FOR LED STRIP RGB+WH




SKU 6570
5MM PCB FOR COB/SMD, FASTEN CONNECTOR




SKU 6571
8MM PCB FOR COB/SMD, FASTEN CONNECTOR




SKU 6572
10MM PCB FOR COB/SMD, FASTEN CONNECTOR




SKU 5190
Silver Body- White Cover (L=1m)



SKU 5184
White Body- White Cover (L=2m)



SKU 5185
Black Body- White Cover (L=2m)



SKU 5107
Black Body- Black Cover (L=2m)


SKU 15151 50 PCS BOX
Silver Body- White Cover (L=2m)

SKU 15152 50 PCS BOX
White Body- White Cover (L=2m)


SKU 15153 50 PCS BOX
Black Body- White Cover (L=2m)




Flexible/Bendable




SKU 5002
Silver Body- White Cover (L=1m)



SKU 5001
Silver Body- White Cover (L=2m)




SKU 5132
Silver Body- White Cover (L=2m)




SKU 5133
Silver Body- White Cover (L=2m)


SKU 5175
Silver Body- White Cover (L=2m)




SKU 15120
Black Body - White Cover (L=2m)




SKU 15121
White Body - White Cover (L=2m)

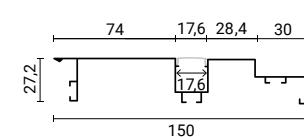


SKU 15113
White Body- White Cover (L=2m)




SKU 5150
Silver Body- White Cover (L=2m)

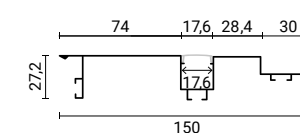


SKU 15114
White Body- Black Cover (L=2m)




SKU 15133
Silver Body - White Cover (L=2m)




SKU 15134
Black Body - White Cover (L=2m)




SKU 15135
Silver Body - White Cover (L=2m)




SKU 5183
Black Body- Black Cover (L=2m)




SKU 5115
Silver Body- White Cover (L=2m)




SKU 5116
Black Body- White Cover (L=2m)



SKU 5114
Black Body- Black Cover (L=2m)




SKU 5194
Silver Body- White Cover (L=1m)




SKU 5103
Silver Body- White Cover (L=2m)


SKU 5102
White Body- White Cover (L=2m)




SKU 5100
Black Body- White Cover (L=2m)




SKU 5101
Black Body - Black Cover (L=2m)




SKU 15124
Body- White Cover (L=2m)




SKU 15125
White Body- White Cover (L=2m)




SKU 15126
Marble Body- White Cover (L=2m)




SKU 15127
Black Body- White Cover (L=2m)

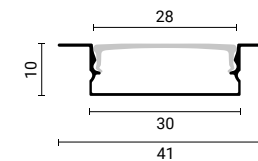


SKU 5118
Silver Body- White Cover (L=2m)

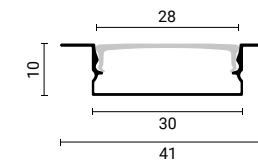


SKU 5119
Black Body- White Cover (L=2m)

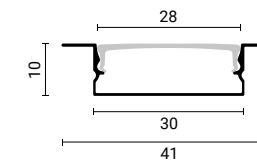


SKU 5117
Black Body- Black Cover (L=2m)




SKU 5109
Black Body- White Cover (L=2m)




SKU 5121
Silver Body- White Cover (L=2m)




SKU 5122
Black Body- White Cover (L=2m)




SKU 5120
Black Body- Black Cover (L=2m)




SKU 5113
Black Body- Black Cover (L=2m)




SKU 5193
Silver Body- White Cover (L=1m)




SKU 5130
Silver Body- White Cover (L=2m)

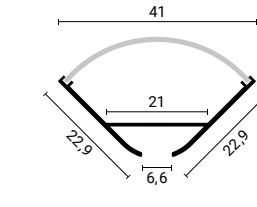


SKU 5110
Silver Body- White Cover (L=2m)

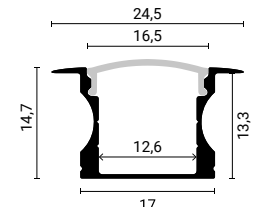


SKU 5108
Silver Body- White Cover (L=2m)




SKU 15128
White Body- White Cover (L=2m)




SKU 15129
Marble Body- White Cover (L=2m)




SKU 5142
Silver Body- White Cover (L=2m)




SKU 5141
Silver Body- White Cover (L=2m)

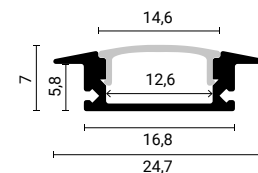


SKU 5106
White Body - White Cover (L=2m)



SKU 5104
Black Body - White Cover (L=2m)

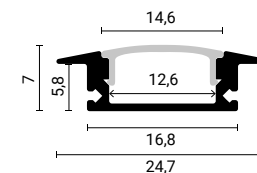

SKU 5105
Black Body - Black Cover (L=2m)




SKU 15136
Silver Body- White Cover (L=2m)


SKU 15154 50 PCS BOX
White Body - White Cover (L=2m)

SKU 15155 50 PCS BOX
Black Body - White Cover (L=2m)


SKU 15156 50 PCS BOX
Black Body - Black Cover (L=2m)

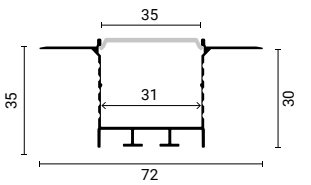


SKU 5123
Silver Body - White Cover (L=2m)

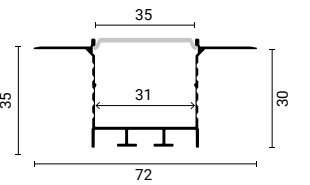


SKU 5125
Black Body - White Cover (L=2m)

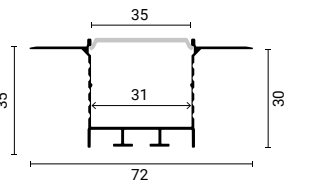


SKU 5124
Black Body - Black Cover (L=2m)

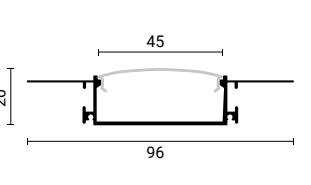


SKU 5134
Silver Body - White Cover (L=2m)

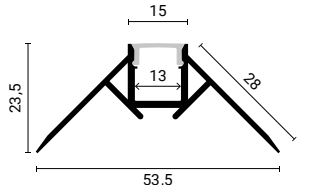


SKU 5165
Silver Body - White Cover (L=2m)

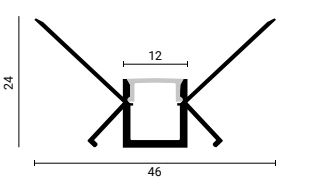


SKU 5166
Black Body - White Cover (L=2m)

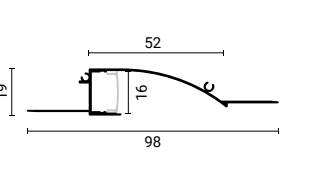


SKU 5128
Silver Body - White Cover (L=2m)

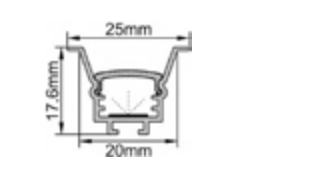


SKU 15132
Silver Body - White Cover (L=2m)

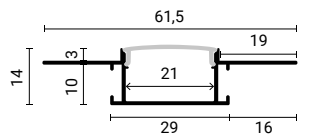


SKU 5145
Silver Body - White Cover (L=2m)

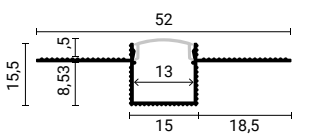


SKU 15111
Silver Body - White Cover (L=2m)

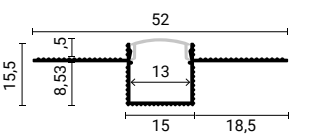


SKU 15112
Silver Body - Black Cover (L=2m)

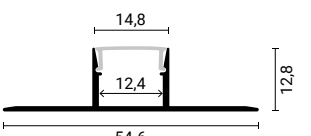


SKU 5143
Silver Body - White Cover (L=2m)

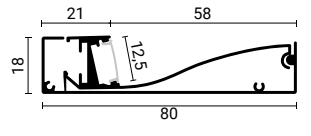


SKU 15115
Silver Body- White Cover (L=2m)




SKU 15116
Black Body- White Cover (L=2m)




SKU 15117
Iron Oxide Body- White Cover (L=2m)

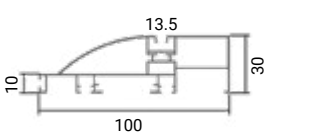


SKU 15123
White Body- White Cover (L=2m)

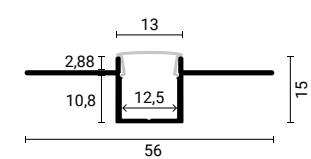


SKU 5162
Silver Body - White Cover (L=2m)




SKU 5144
Silver Body - White Cover (L=2m)

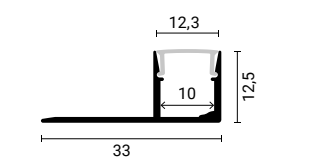


SKU 5111
Silver Body - White Cover (L=2m)

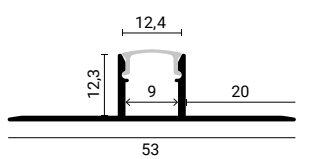


SKU 5112
Silver Body - White Cover (L=2m)

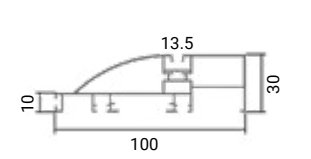

SKU 15122
Black Body- White Cover (L=2m)




Keel Mesh for Neon
SKU 15130
Silver Body (L=2m)

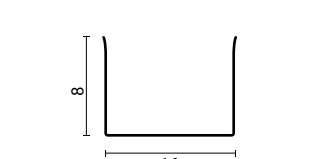

Keel Mesh for Neon
SKU 15131
Silver Body (L=2m)



CORNERS FOR 15115-15117
SKU 15118 Black Color
SKU 15118S Silver Color
SKU 15119 Gray Color

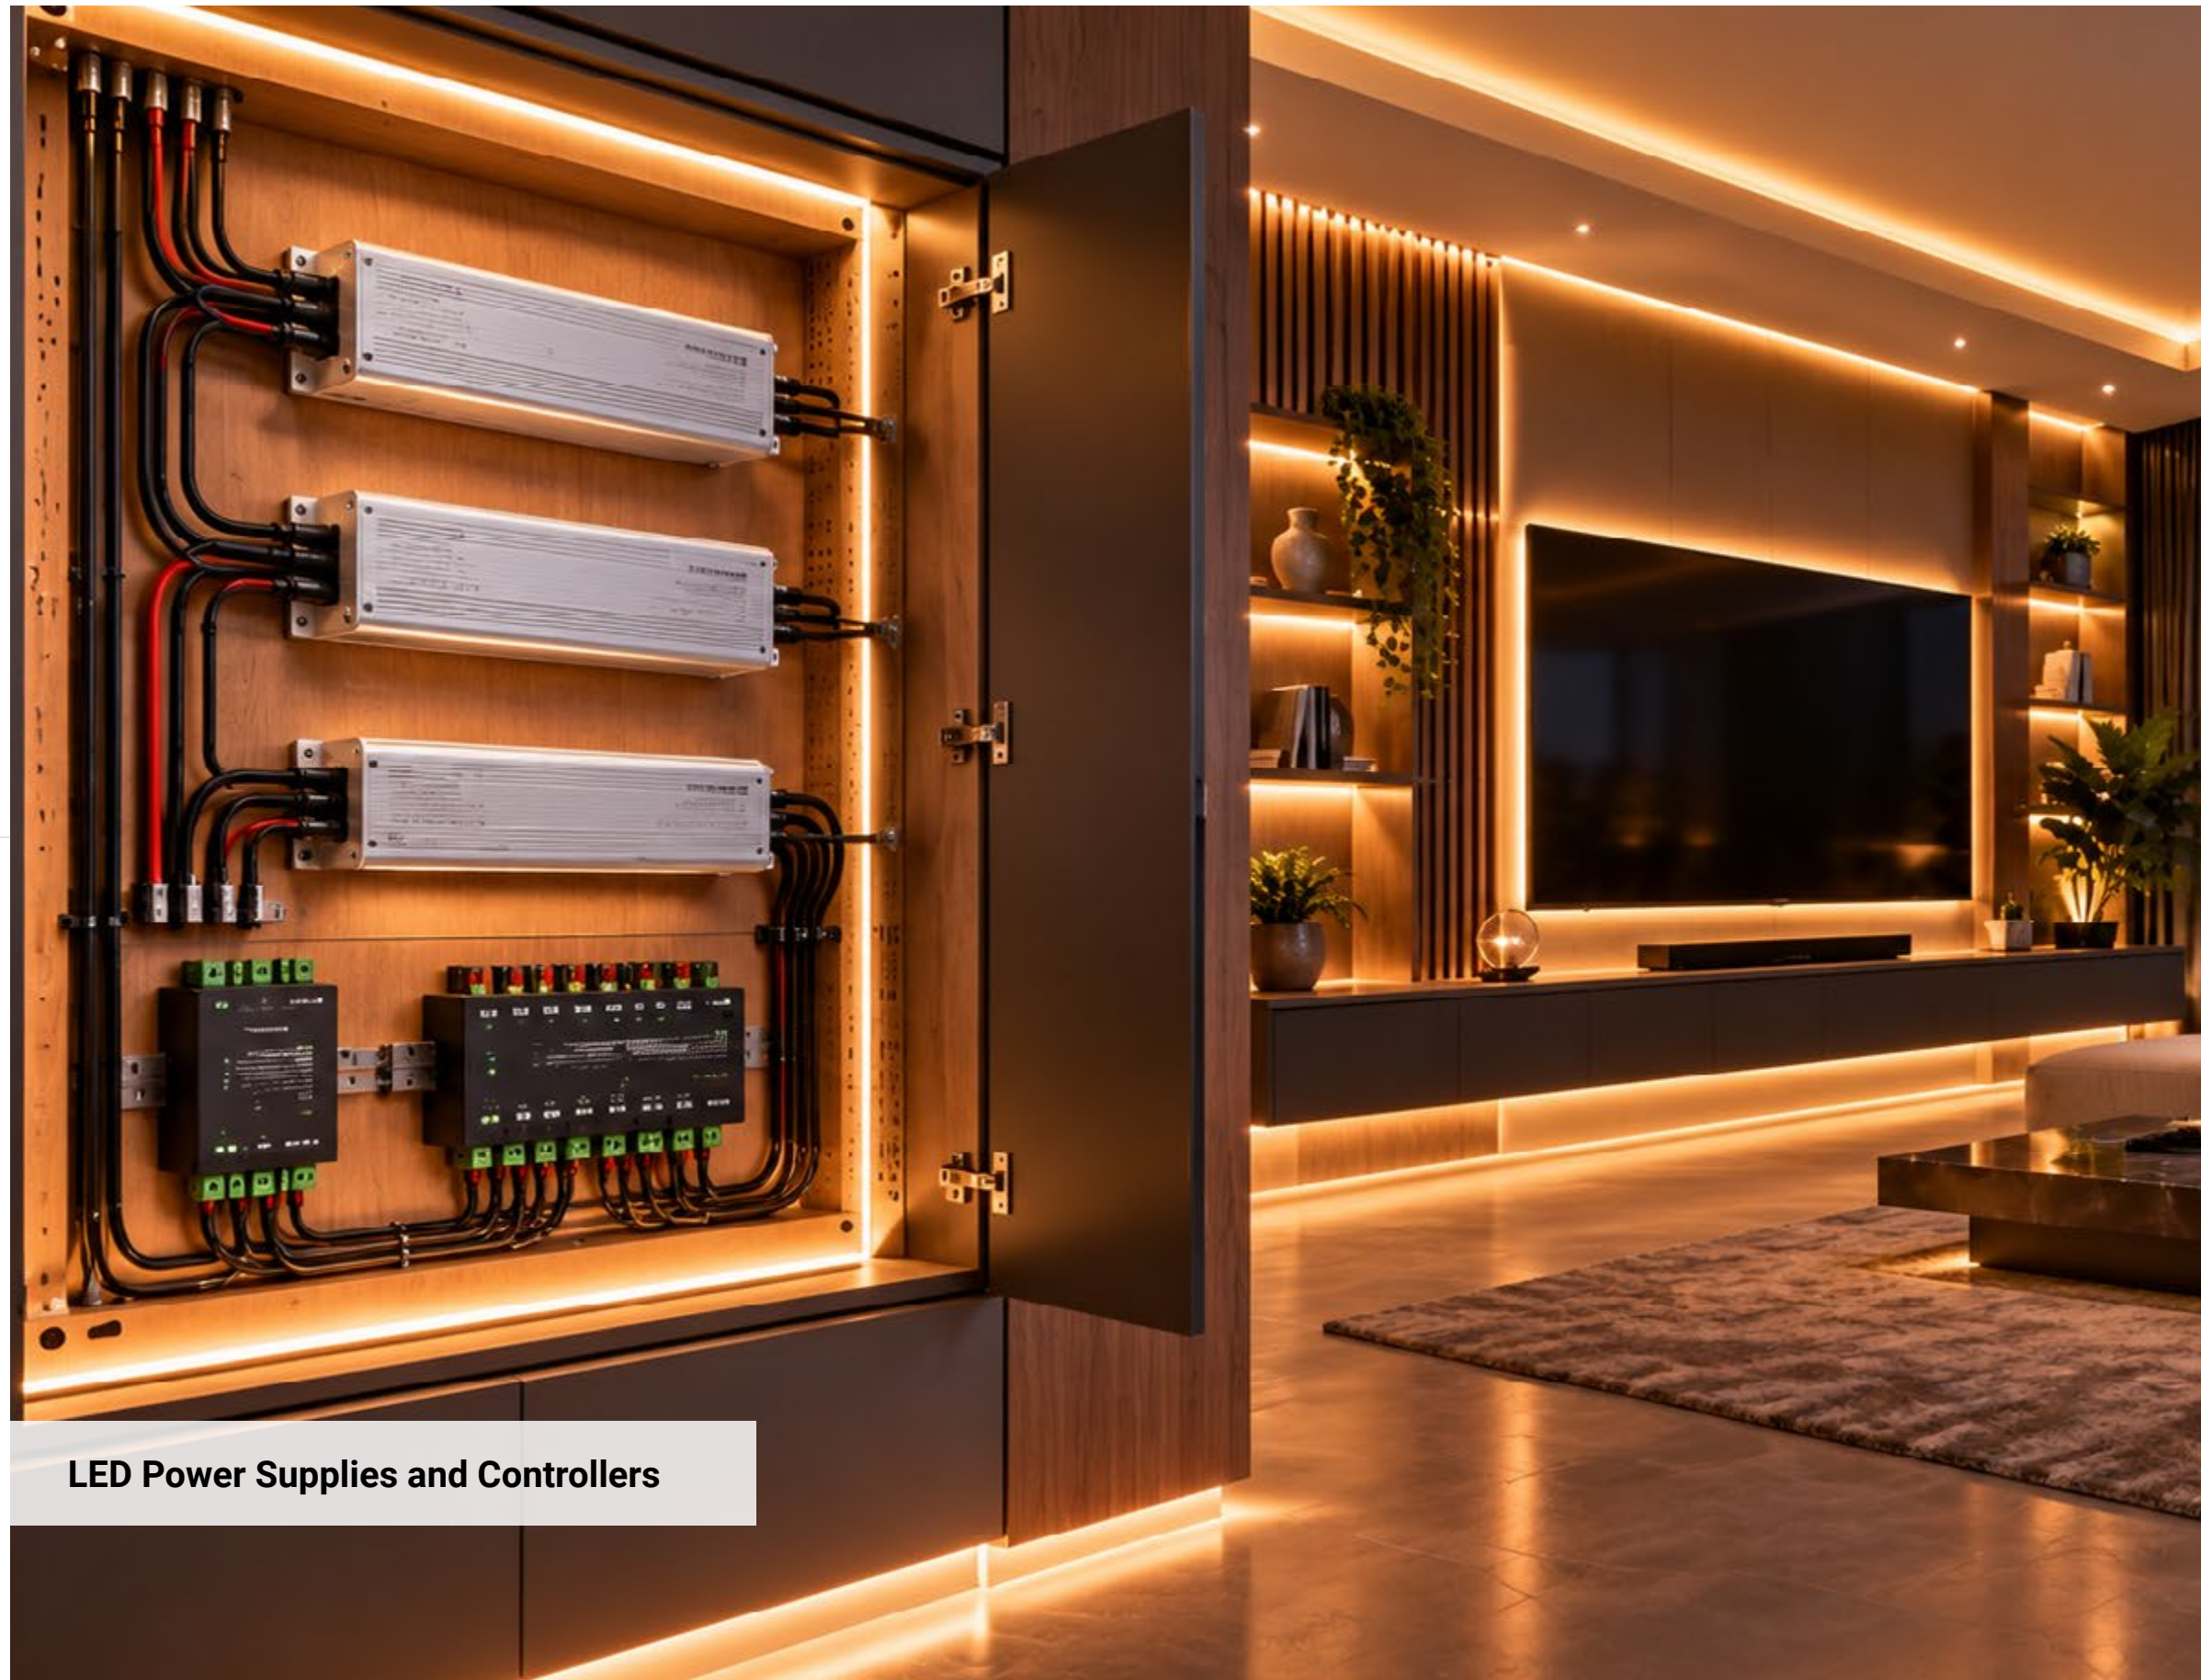**LED Power Supplies and Controllers**

Our power supply portfolio covers all major global standards, delivering reliable performance across a wide range of LED applications. Designed with efficiency and durability in mind, they reduce both energy consumption and maintenance costs. Compact narrow-body models ensure easy installation even in confined spaces, making them the perfect choice for professional lighting projects.

Features:

- Available in 5V, 12V, and 24V versions with multiple sizes and shapes
- Specialized dimmable options for LED panels and downlights
- Waterproof models with various IP protection ratings
- Forced heat dissipation for extended lifespan and reliability
- High efficiency for cost-effective operation

Applications:

- Ideal for powering LED strips, panels, and downlights
- Suitable for residential, commercial, and industrial lighting projects
- A core component for every LED installation



DIN RAIL POWER SUPPLY	
12V or 24V Output - Metal	
Input Voltage	90-264V 50/60Hz
Material	Metal
IP Rating	IP20
Dimmable	No

SKU	Watt	Output Voltage	Current	Dimension
6275	75W	DC: 12V	6.3A	33x126x102mm
6277	120W	DC: 12V	10A	40x125x128mm
6279	240W	DC: 12V	20A	63x125x127mm
6276	75W	DC: 24V	3.2A	33x125x116mm
6278	120W	DC: 24V	5A	40x125x126mm
6280	240W	DC: 24V	10A	63x125x1230mm



LED CABINET POWER SUPPLIES	
Super Slim - Plastic 12V	
Input Voltage	175-265V 50/60Hz
Material	Plastic
IP Rating	IP20
Dimmable	No

SKU	Watt	Output V	Current	Dimension
6291	24W	DC: 12V	2A	117x55x18.5mm
6292	36W	DC: 12V	3A	137x55x18.5mm
6293	60W	DC:12V	5A	169x59x20mm
6294	100W	DC: 12V	8.3A	198x59x20mm
6299	Connector Cable			



DIN RAIL POWER SUPPLY	
12V/24V Output - Plastic - Slim	
Input Voltage	100-240V 50/60Hz
Material	Plastic
IP Rating	IP20
Dimmable	No

SKU	Watt	Output V	Current	Dimension
6265	60W	DC: 12V	5A	52.5x90x54.5mm
6267	100W	DC: 12V	8.33A	70x90x54.5mm
6266	60W	DC: 24V	2.5A	52.5x90x54.5mm
6268	100W	DC: 24V	4.16A	70x90x54.5mm



3
Years
Warranty

Noiseless

Quick
Connect

LED POWER SUPPLIES	
Slim - 12V or 24V with quick connection	
Input Voltage	198-242V 50/60Hz
Material	Metal
IP Rating	IP20
Dimmable	No

SKU	Watt	Output Voltage	Current	Dimension
6235	60W	DC: 12V	5A	131x52x27.3mm
6236	100W	DC: 12V	8.3A	154x52x27.3mm
6237	150W	DC: 12V	12.5A	211x52x27.3mm
6238	200W	DC: 12V	16.5A	211x52x27.3mm
6239	300W	DC: 12V	25A	223x63x29mm
6240	400W	DC: 12V	33.3A	223x63x29mm
6245	60W	DC: 24V	2.5A	131x52x27.3mm
6246	100W	DC: 24V	4.1A	154x52x27.3mm
6247	150W	DC: 24V	6.25A	211x52x27.3mm
6248	200W	DC: 24V	8.3A	211x52x27.3mm
6249	300W	DC: 24V	12.5A	211x62x28.7mm
6250	400W	DC: 24V	16.6A	240x63x29mm



TRIAC POWER SUPPLY	
Dimmable 12V or 24V	
Input Voltage	220-240V 50/60Hz
Material	Metal
IP Rating	IP20
Dimmable	YES

SKU	Watt	Output Voltage	Current	Dimension
6271	75W	DC: 12V	6.25A	234x48.8x29.5mm
6272	100W	DC: 12V	8.33A	230x50x30mm
6273	150W	DC: 12V	12.5A	290x49x28.8mm
6281	75W	DC: 24V	3.1A	232x50x30mm
6282	100W	DC: 24V	4.17A	232x50x30mm
6283	150W	DC: 24V	6.25A	206x67x37mm



LED POWER SUPPLIES	
Slim - Metal - 12V or 24V	
Input Voltage	100-240V 50/60Hz
Material	Metal
IP Rating	IP20
Dimmable	No

SKU	Watt	Output Voltage	Current	Dimension
6211	60W	DC: 12V	5A	130x50x31mm
6212	100W	DC: 12V	8.4A	190x50x31mm
6213	150W	DC: 12V	12.5A	200x62x31mm
6214	200W	DC: 12V	16.7A	208x82x32mm
6221	60W	DC: 24V	2.5A	130x50x31mm
6222	100W	DC: 24V	4.2A	190x50x31mm
6223	150W	DC: 24V	6.25A	200x60x31mm
6224	200W	DC: 24V	8.35A	208x82x32mm



LED POWER SUPPLIES	
Plastic 12V or 24V	
Input Voltage	100-240V 50/60Hz
Material	Plastic
IP Rating	IP20
Dimmable	No

SKU	Watt	Output Voltage	Current	Dimension
6201	36W	DC: 12V	3A	119x52x32mm
6202	60W	DC: 12V	5A	119x52x32mm
6203	72W	DC: 12V	6A	119x52x32mm
6206	36W	DC: 24V	1.5A	119x52x32mm
6207	60W	DC: 24V	2.5A	119x52x32mm
6208	72W	DC: 24V	3A	119x52x32mm



LED POWER SUPPLIES	
Plastic Case 12V or 24V	
Input Voltage	100-240V 50/60Hz
Material	Plastic
IP Rating	IP20
Dimmable	No

SKU	Watt	Output Voltage	Current	Dimension
6231	24W	DC: 12V	2A	120x42x28mm
6232	36W	DC: 12V	3A	140x48x30mm
6233	60W	DC: 12V	5A	155x53x30mm
6241	24W	DC: 24V	1A	120x42x28mm
6242	36W	DC: 24V	1.5A	140x48x30mm
6243	60W	DC: 24V	2.5A	155x53x30mm



3
Years
Warranty

IP67

LED POWER SUPPLIES	
Waterproof - Metal - 12V or 24V	
Input Voltage	100-240V 50/60Hz
Material	Metal
IP Rating	IP67
Dimmable	No

SKU	Watt	Output Voltage	Current	Dimension
6251	60W	DC: 12V	5A	158x52x32mm
6252	100W	DC: 12V	8.4A	220x52x32mm
6253	150W	DC: 12V	12.5A	225x65x26mm
6254	200W	DC: 12V	16.7A	244x80x32mm
6261	60W	DC: 24V	2.5A	158x52x32mm
6262	100W	DC: 24V	4.2A	220x52x32mm
6263	150W	DC: 24V	6.25A	230x65x32mm
6264	200W	DC: 24V	8.35A	244x80x32mm



IP20

LED POWER SUPPLIES	
Metal - 12V	
Input Voltage	110V/220V 50/60Hz
Material	Metal
IP Rating	IP20
Dimmable	No

SKU	Watt	Output Voltage	Current	Dimension
6104	24W	DC: 12V	2A	85x57x34mm
6121	36W	DC: 12V	3A	85x57x34mm
6105	60W	DC: 12V	5A	110x78x38mm
6109	100W	DC: 12V	8.3A	160x98x42mm
6106	120W	DC: 12V	10A	160x98x42mm
6114	150W	DC: 12V	12.5A	205x100x50mm
6117	250W	DC: 12V	20A	200x109x50mm
6108	360W	DC: 12V	30A	220x115x55mm
6124	500W	DC: 12V	41.5A	220x115x55mm

Fan

NEW



IP20

LED ULTRA-THIN POWER SUPPLY	
Nano Series - 12V ; 24V	
Input Voltage	110-240V 50/60Hz
Material	Plastic
IP Rating	IP20
Dimmable	No

SKU	Watt	Output Voltage	Current	Dimension
6171	24W	DC: 12V	2A	83x34x13mm
6172	48W	DC: 12V	4A	93x34x13mm
6173	72W	DC: 12V	6A	123x34x13mm
6174	100W	DC: 12V	8.33A	123x34x13mm
6175	150W	DC: 12V	12.5A	153x34x13mm
6176	200W	DC: 12V	16.66A	153x34x13mm
6177	300W	DC: 12V	25A	200x35.8x16mm
6181	24W	DC: 24V	1A	83x34x13mm
6182	48W	DC: 24V	2A	93x34x13mm
6183	72W	DC: 24V	3A	123x34x13mm
6184	100W	DC: 24V	4.16A	123x34x13mm
6185	150W	DC: 24V	6.25A	153x34x13mm
6186	200W	DC: 24V	8.3A	153x34x13mm
6187	300W	DC: 24V	12.5A	200x35.8x16mm



IP20

LED POWER SUPPLIES	
Metal - 24V	
Input Voltage	110V/220V 50/60Hz
Material	Metal
IP Rating	IP20
Dimmable	No

SKU	Watt	Output Voltage	Current	Dimension
6154	60W	DC: 24V	2.5A	116x95x40mm
6151	100W	DC: 24V	4.2A	199x98x42mm
6155	150W	DC: 24V	6.25A	199x98x42mm
6152	250W	DC: 24V	10.5A	200x110x50mm
6153	360W	DC: 24V	15A	220x120x50mm

Fan



LED POWER SUPPLIES	
Slim Line - Metal - 12V / 24V	
Input Voltage	220V 50/60Hz
Material	Metal
IP Rating	IP20
Dimmable	No

SKU	Watt	Output Voltage	Current	Dimension	
6131	60W	DC: 12V	5A	170x45x38mm	
6132	100W	DC: 12V	8.5A	190x48x38mm	
6133	150W	DC: 12V	12.5A	207x63x43mm	
 Fan	6134	250W	DC: 12V	20A	228x71x43mm
	6135	360W	DC: 12V	30A	228x71x43mm
	6161	60W	DC: 24V	2.5A	170x45x38mm
	6162	100W	DC: 24V	4.2A	190x48x38mm
	6163	150W	DC: 24V	6.25A	207x63x43mm
 Fan	6164	250W	DC: 24V	10.5A	228x71x43mm
	6165	360W	DC: 24V	15A	228x71x43mm



LED POWER SUPPLIES	
Plastic IP44 - 12V ; 24V	
Input Voltage	AC100-240V 50/60Hz
Material	Plastic
IP Rating	IP44
Dimmable	No

SKU	Watt	Output Voltage	Current	Dimension
16101	24W	DC: 12V	1.5A	86x46x33mm
16102	36W	DC: 12V	3A	85x50x34mm
16103	60W	DC: 12V	5A	115x47x33mm
16104	72W	DC: 12V	6A	122x55x33mm
16105	24W	DC: 24V	1A	136x64x40mm
16106	36W	DC: 24V	1.5A	85x50x34mm
16107	60W	DC: 24V	2.5A	115x47x33mm
16108	72W	DC: 24V	3A	122x55x33mm



LED POWER SUPPLIES	
Auto Switch - 12V & 24V	
Input Voltage	180V/265V 50/60Hz
Material	Aluminium
IP Rating	IP20
Dimmable	No

SKU	Watt	Output Voltage	Current	Dimension
16111	60W	Auto 12V or 24V	5A/2.5A	158x50x29mm
16112	100W	Auto 12V or 24V	8.33A/4.16A	176x50x29mm
16113	150W	Auto 12V or 24V	12.5A/6.25A	199x50x29mm
16114	200W	Auto 12V or 24V	12.67A/8.33A	218x50x29mm
16115	300W	Auto 12V or 24V	25A/12.5A	240x50x29mm



LED POWER SUPPLIES	
Plastic - 12V ; 24V	
Input Voltage	110-240V 50/60Hz
Material	Plastic
IP Rating	IP20
Dimmable	No

SKU	Watt	Output Voltage	Current	Dimension
6120	18W	DC: 12V	1.5A	85x50x34mm
6101	24W	DC: 12V	2A	85x50x34mm
6102	36W	DC: 12V	3A	115x47x33mm
6103	60W	DC: 12V	5A	122x55x33mm
6119	80W	DC: 12V	6.5A	136x64x40mm
6141	24W	DC: 24V	1A	85x50x34mm
6142	36W	DC: 24V	1.5A	115x47x33mm
6143	60W	DC: 24V	2.5A	122x55x33mm
6144	80W	DC: 24V	3.3A	136x64x40mm



LED POWER SUPPLIES	
Waterproof - Metal - 12V	
Input Voltage	180-264V 50/60Hz
Material	Metal
IP Rating	IP67
Dimmable	No

SKU	Watt	Output Voltage	Current	Dimension
6110	30W	DC: 12V	2.5A	160x30x20mm
6111	60W	DC: 12V	5A	220x52x32mm
6112	150W	DC: 12V	12.5A	244x80x32mm
6113	100W	DC: 12V	8.3A	230x65x32mm



POWER SUPPLIES 5V	
Metal	
Input Voltage	220V 50/60Hz
Material	Metal
IP Rating	IP20
Dimmable	No

SKU	Watt	Output V	Current	Dimension
6191	200W	DC: 5V	40A	190x80x32mm
6192	300W	DC: 5V	60A	217x87x32mm
6193	200W	DC: 5V	40A	150x50x19mm



POWER SUPPLIES 48V	
Waterproof - Metal	
Input Voltage	220-240V 50/60Hz
Material	Metal
IP Rating	IP67
Dimmable	No

SKU	Watt	Output V	Current	Dimension
6255	150W	DC: 48V	3.125A	176x56x36mm
6256	200W	DC: 48V	4.17A	176x56x36mm



PIR MOTION HAND WAVE	
3 in 1 SENSOR	
Voltage	DC 12-24V
Max Power	Depend of Power Supply
Mode Selection	PIR Motion , Hand Wave Partition Sensor



SKU	7327
-----	------

SENSORS COMPATIBILITY

Compatible only with 3-pin control Cabinet Power Supplies 6291, 6292, 6293, 6294, 9295

SINGLE/DOUBLE DOOR SENSOR	
Surface Mountable	
Voltage	DC 12-24V
Max Power	Depend of Power Supply
Sensor Distance	5cm - 10cm
Hole Size	10mm



SKU	7328	7329
Mode	Single	Double



DIGITAL LED STRIP CONTROLLER			
DC 5-24V SD-Card			
Voltage	5V-24V	Dimension	160x95x30mm
IP Rating	IP20	Supported Pixels	1024/2048



SKU 6331

DIGITAL LED STRIP CONTROLLER			
WWA DC5-24V SPI-Signal for SKU:4493			
Voltage	5V-24V	Dimension	77x57x20mm
IP Rating	IP20	Output Signal	SPI



SKU 6333

RF CONTROLLER			
DC12-24V			
Voltage	12V-24V	Mode	28 kinds
IP Rating	IP20	Output Signal	1 Group SPI



SKU 6541

DIGITAL LED STRIP CONTROLLER			
DC 5V - 14Keys - Remote Control			
Voltage	5V	Dimension	80x40x6mm
IP Rating	IP20	Material	Plastic



SKU 6332

MAGIC RGB CONTROLER			
2.4GHz Bluetooth Remote Controller - 24 Keys			
Voltage	5V-24V	Dimension	120x50x8mm
IP Rating	IP20	Output Signal	SPI



SKU 6582

AMPLIFIER			
DC5-24V 2*4=8 GROUP SPI SIGNAL			
Voltage	5V-24V	Output	2x4 Group SPI
IP Rating	IP20	Output Signal	SPI



SKU 6542

HAND SWEEP SENSOR	
PREMIUM LINE	
3 in 1 SENSOR	
Voltage	DC 5-24V
Max Power	15W-72W
Sensor Distance	<5.5cm

Hand stay moment can be set dimmable or non-dimmable.
3 Levels of output PWM frequency can be set (500Hz / 2kHz/8kHz [default] / 4kHz)



SKU 16306



DMX512 TO SPI PIXEL DECODER	
PREMIUM LINE	
RF Controller	
Input Voltage	DC 5-24V
Input Current	10A
Output Signal	SPI(TTL)x3

DMX512 to SPI decoder and RF controller with digital display.
DMX decode mode, stand-alone mode and RF mode selectable.
Standard DMX512 compliant interface, set DMX decode start address by buttons.



SKU 16307

DMX/SPI CONTROLLER	
4 Output Ports	
DC 5V or DC 12-24V input, 512MB SD card, 4 Output ports (One port can run 16 Pcs RGBW 44 Pixels)	



SKU 7144

DMX/SPI CONTROLLER	
8 Output Ports	
DC 5V or DC 12-24V input, 512MB SD card, 8 Output ports (One port can run 16 Pcs RGBW 44 Pixels)	



SKU 7145



LED REMOTE CONTROL SET

Single Color RF 2.4G 3CH 3X4A V3

LED Remote

Output signalRF 2.4GHz

Working voltage3VDC(CR2032)

Standby time12 months

Remote distance30m

Dimension107x58.5x9mm

LED Receiver

Input voltage12/24VDC

Output power144W/288W

Output current3CH,4A/CH

IP RatingIP20

Dimension108x35x18mm

Professional series

SKU6348

Battery



CCT RF CONTROLLER

Iron shell RF433M wireless 8-key touch

Working voltage:DC 12-24C

Operatig temperature:-20°C +60°C

Output current / power:10A*2CH, 12V < 240W, 24V < 480W

Weight:140gr

Product size:L85xW62xH20mm

Professional series

SKU6583

Battery



LED REMOTE CONTROL SET

RGB - RF 2.4G 3CH 3x4A V3

LED Remote

Output signalRF 2.4GHz

Working voltage3VDC(CR2032)

Standby time12 months

Remote distance30m

Dimension107x58.5x9mm

LED Receiver

Input voltage12/24VDC

Output power144W/288W

Output current3CH,4A/CH

IP RatingIP20

Dimension108x35x18mm

Professional series

SKU6349

Battery



LED RGB CONTROL

Touch - 1 Zone RGB - RF 2.4G 3CH 3x4A V3

• Match with OPTONICA Professional LED Controllers.

• Ultra sensitive color adjustment touch slide.

• Each remote can match one or more receivers.

• Operate with LED indicator light.

• Magnet on the back which can be easily stuck on any metal surfaces

• CR2032 battery powered.

Professional series

SKU6359

Single Color

SKU6360

RGB

Battery



RGB+CCT LED STRIP CONTROLLER KIT

5 Channels Constant Voltage

• 5 Channels constant voltage output for RGB+ CCT light

• Ultra sensitive color adjustment touch wheel

• Smooth dimming and switch without any flickering

• Built in 10 dynamic mode, include jump or gradual change style

• Independent dimming function of each R, G, B channel to achieve millions of colors

• Auto-transmitting function: Controller automatically transmit signal to another controller with 30m control distance

• Synchronize on multiple number of controllers

• Light on/off fade time 3s selectable

Professional series

SKU6387

Battery



LED RGB + CCT REMOTE CONTROL

Touch - 4 Zone RF 2.4 Ghz

• Match with OPTONICA Professional LED Controllers.

• Ultra sensitive color adjustment touch slide.

• Each remote can match one or more receivers.

• Operate with LED indicator light.

• AAAX2 battery powered.

• Dimension 122x53x17.5mm

Professional series

SKU6368

Battery



Bluetooth & RF 2CH LED Controller

1 Channels 1x8A - Push Dim - Wireless Control

• Remote control or connected with external push switch to achieve on/off and dimming function

• Ultra sensitive brightness adjustment touch slide

• Smooth dimming and switch without any flickering

• Auto-transmitting function: Controller automatically transmit signal to another controller with 30m control distance

• Synchronize on multiple number of controllers

• Light on/off fade time 3s selectable

• Magnet on the back which can be easily stuck on back holder or any metal surfaces

Professional series

SKU6386

Battery



LED CCT REMOTE CONTROL

Touch - 4 Zone RF 2.4Ghz

• Match with OPTONICA Professional LED Controllers.

• Ultra sensitive color adjustment touch wheel.

• Each remote can match one or more receivers.

• Operate with LED indicator light.

• AAAX2 battery powered.

• Dimension 122x53x17.5mm

Professional series

SKU6350

Battery



Wall Mounted Holder for 6345

SKU6347



LED RGB/RGBW REMOTE CONTROL

4 Zone RF 2.4GHz

- Match with OPTONICA Professional LED Controllers.
- Ultra sensitive color adjustment touch wheel.
- Each remote can match one or more receivers.
- Operate with LED indicator light.
- AAx2 battery powered.
- Dimension 122x53x17.5mm

Professional series

SKU6345





Wall Mounted Holder for 6335

SKU6335



LED RGB/RGBW REMOTE CONTROL

4 Zone RF 2.4GHz

- Match with OPTONICA Professional LED Controllers.
- Ultra sensitive color adjustment touch wheel.
- Each remote can match one or more receivers.
- Slim and light
- CR2032 battery powered.
- Dimension 107x58.5x9mm

Professional series

SKU6335





Wall Mounted Holder for 6341 ; 6340

SKU6346



LED REMOTE CONTROL

4 Zone Single Color RF 2.4 GHz

- Match with OPTONICA Professional LED Controllers.
- Each remote can match one or more receivers.
- Slim and light
- IP20
- CR2032 battery powered.
- Dimension 135x40x11mm

Professional series

SKU6341





Wall Mounted Holder for 6340

SKU6340



LED REMOTE CONTROL

1 Zone CCT RF 2.4 GHz

- Match with OPTONICA Professional LED Controllers.
- Each remote can match one or more receivers.
- Slim and light.
- IP20
- CR2032 battery powered.
- Dimension 135x40x11mm

Professional series

SKU6340





SMART Wifi-BLE MUSIC CONTROLLER

IR 44 Keys RGB

Input Voltage	DC12-24V
Output	3 Channels
Output Current	2A (each channel)
Output Power	12V-72W ; 24V-144W
Dimension	70x30x15 mm

• Support remote/ local control through 2G / 3G /4G / Wi-Fi networks.

SKU6336





SMART Wifi-BLE CONTROLLER

IR 24 Keys RGBCCT

Input Voltage	DC12-24V
Output	5 Channels
Output Current	1A (each channel)
Output Power	12V-60W ; 24V-120W
Dimension	70x30x15 mm

• Support remote/ local control through 2G / 3G /4G / Wi-Fi networks.

SKU6337





SMART Wifi-BLE CONTROLLER

IR 14 Keys CCT

Input Voltage	DC12-24V
Output	2 Channels
Output Current	2A (each channel)
Output Power	12V-48W ; 24V-96W
Dimension	70x30x15 mm

• Support remote/ local control through 2G / 3G /4G / Wi-Fi networks.

SKU6338





LED CONTROLLER

IR 40 Keys RGBW

Input Voltage	DC12-24V
Output	4 Channels
Output Current	2A (each channel)
Output Power	12V-96W ; 24V-192W
Dimension	50x35x22mm

SKU6339





WALL MOUNTED TOUCH PANEL

4 Zone/Color Wheel/AC Input/DMX 512 Signal

Input Voltage 100-240VAC
Input Current 0.1A
Output Signal DMX512,RF2.4Ghz

- Touch panel 4 zone 1-4 color DMX512 master, can also be used as 4 zone 1-4 color RF remote.
- DMX signal output, comply to standard DMX512 protocol, compatible with DMX decoder from any supplier.
- Ultra sensitive high strength glass touch panel with touch color wheel in the middle.
- Touch keys with LED indicator.

Professional series

SKU 6376



WALL MOUNTED TOUCH PANEL

4 Zone/Color Wheel/AC Input/DMX 512 Signal

Input Voltage 100-240VAC
Input Current 0.1A
Output Signal DMX512,RF2.4Ghz

- Touch panel 4 zone 1-4 color DMX512 master, can also be used as 4 zone 1-4 color RF remote.
- DMX signal output, comply to standard DMX512 protocol, compatible with DMX decoder from any supplier.
- Ultra sensitive high strength glass touch panel with touch color wheel in the middle.
- Touch keys with LED indicator.

Professional series

SKU 6377



LED REMOTE CONTROL

Single Color Touch - 2.4 GHz

- Touch panel 4 zone 1 color RF remote.
- Each zone can remote control multiple receivers, LED controller, dimming driver or smart lamp.
- Ultra sensitive high strength glass touch panel with touch color slide in the middle.
- Smooth and accurate adjustment by touching the slide.
- Touch keys with chord tones and LED indicator.
- Free installation, no wiring, removable.
- AAA x 2 battery powered.

Professional series

SKU 6375



LED Remote Control

RGB /RGBW Touch - 2.4 GHz

- Touch panel 4 zone 1 color RF remote.
- Each zone can remote control multiple receivers, LED controller, dimming driver or smart lamp.
- Ultra sensitive high strength glass touch panel with touch color slide in the middle.
- Smooth and accurate adjustment by touching the slide.
- Touch keys with chord tones and LED indicator.
- Free installation, no wiring, removable.
- AAA x 2 battery powered.

Professional series

SKU 6374



ULTRA THIN RF REMOTE CONTROLLER

4 Zone RGB+CCT / Touch Color Wheel

- Apply to RGB+CCT LED controller.
- Ultra sensitive color adjustment touch wheel.
- Each remote can match one or more receiver.
- CR2032 battery powered.
- Operate with LED indicator light.

Professional series

SKU 6381



ULTRA THIN RGB/RGBW CONTROLLER

1 and 4 zone RGB or RGBW/Touch color wheel

- Apply to RGB or RGBW controller.
- Ultra sensitive color adjustment touch wheel.
- Each remote can match one or more receiver.
- CR2032 battery powered.
- Operate with LED indicator light.

Professional series

SKU 6344



DESK MOUNT RF REMOTE CONTROLLER

Rotary Dimming/CR2032 Battery

Output signal RF(2.4GHz) Standby current <10μA
Working voltage 3VDC(CR2032) Standby time 1 year
Working current <5mA Remote distance 30m

- Apply to RGB LED controller.
- Rotate knob to change RGB color, color temperature or brightness, support long press or twice click operation.
- Each remote can match one or more receiver.
- CR2032 battery powered.
- Desk mount, removeable anywhere easily.

Professional series

SKU 6379



ROTATED DIMMER

Rotary Dimming 8A

Input Voltage DC12-24V
Output 1 Channels
Output Current 8A
Output Power 12V-96W ; 24V-192W
Dimension 105x63x55 mm

Professional series

SKU 6316





LED SINGLE COLOR CONTROLLER

4 CH x 4A

Input Voltage	12-24VDC	Output Voltage	3x(12-24)VDC
Input Current	12.5A	Output Current	3CH,4A/CH
IP Rating	IP20	Output Power	144-288W
Dimension	86x86x53 mm	Output Type	Constant Voltage

Professional series

SKU6357



LED 0-10V DIMMER

1 CH - Rotary glass panel

Input Voltage	100-240V	Output Signal	0-10V (50mA)
Dimension	86x86x48 mm	Output Current	1.5A

- Rotary glass panel 1-10V dimmer, 1 channel output.
- Output connect with 0/1-10V dimmable driver.
- Output 1 channel 1-10V signal, connect with 1-10V dimmable driver.
- High voltage AC input, High voltage AC relay output.
- Compatibility with RF 2.4G single zone or multiple zone dimming remote control.

Professional series

SKU6399



LED RGB CONTROLLER

4 CH x 4A

Input Voltage	12-24VDC	Output Voltage	3x(12-24)VDC
Input Current	12.5A	Output Current	3CH,4A/CH
IP Rating	IP20	Output Power	144-288W
Dimension	86x86x53 mm	Output Type	Constant Voltage

Professional series

SKU6358



LED AC TRIAC DIMMER

1 CH - Rotary glass panel

Input Voltage	100-240V	Output Signal	150-360W
Dimension	86x86x48 mm	Output Current	Max 1.5A

- Rotary glass panel AC phase-cut dimmer, 1 channel output.
- To dim and switch single color dimmable LED lamps, traditional incandescent and halogen lights.
- 256 levels 0-100% dimming smoothly without any flash.
- Leading edge dimming or trailing edge dimming set by dip switch.
- Over-heat / Over-load protection, recover automatically.

Professional series

SKU6351



LED DMX CONTROLLER

4 Zones control DMX512 + RF 2.4GHz

Input Voltage	85-265V	Control Mode	4 Zone Control
Output Signal	DMX512+RF	Light Type	Single Color
IP Rating	IP20	Remote Distance	30m
Dimension	86x86x36 mm	Working Temp.	-20°C/+50°C

Professional series

SKU6361



LED 0-10V DIMMER

4 Zones - Touch glass panel

Input Voltage	100-240V	Output Signal	0-10V (20mA)
Dimension	86x86x33 mm	Output Current	20mA/CH

- Touch panel 0-10V dimmer, output 4 channel 0-10V signal
- Output connect with 0/1-10V dimmable driver.
- Ultra sensitive high strength glass touch panel with touch slide in the middle.
- Compatibility with RF 2.4G dimming remote control.
- Touch keys with LED indicator.

Professional series

SKU6398



LED RGBW DMX CONTROLLER

4 Zones control DMX512 + RF 2.4GHz

Input Voltage	85-265V	Control Mode	4 Zone Control
Output Signal	DMX512+RF	Light Type	RGBW
IP Rating	IP20	Remote Distance	30m
Dimension	86x86x36 mm	Working Temp.	-20°C/+50°C

Professional series

SKU6362

NEW



WALL MOUNTED TOUCH PANEL

4 Zones control RGB+CCT - Battery CR2032

Output signal	RF (2.4 GHz)	Working Voltage	3VDC(CR2032)
Remote distance	30m(Barrier-free space)	Size	86x86x9.5mm

- Touch panel 1-5 color 4 zone RF remote.
- Each touch panel can remote control multiple RF 2.4G LED controllers.
- Ultra sensitive high strength glass touch panel with touch color wheel in the middle.
- Touch keys with LED indicator .
- Free installation, no wiring, removable.
- CR2032 battery powered

Professional series

SKU16312

NEW



CCT REMOTE CONTROL

1 Zone - Battery CR2032

Output signal	RF (2.4 GHz)	Working Voltage	3VDC(CR2032)
Remote distance	30m(Barrier-free space)	Size	75x75x18mm

- Apply to single color or dual color(warm white + cool white)controller
- Each remote can match one or more receive.
- CR2032 battery powered.
- Operate with LED indicator light.
- Magnet on the back which can be stuck on back holder.

Professional series

SKU 16308



NEW



RGB/RGBW REMOTE CONTROL

1 Zone - Battery CR2032

Output signal	RF (2.4 GHz)	Working Voltage	3VDC(CR2032)
Remote distance	30m(Barrier-free space)	Size	75x75x18mm

- Apply to RGB/RGBW controller
- Each remote can match one or more receive.
- CR2032 battery powered.
- Operate with LED indicator light.
- Magnet on the back which can be stuck on back holder.

Professional series

SKU 16309



NEW



GLASS PANEL RF REMOTE CONTROL

2 Zone Single Color Dimming - Battery CR2032

Output signal	RF (2.4 GHz)	Working Voltage	3VDC(CR2032)
Remote distance	30m(Barrier-free space)	Size	86x86x15mm

- Apply to single color LED controller .
- Each remote can match one or more receiver .
- CR2032 battery powered.

Professional series

SKU 16310



NEW



Single or Dual Color CCT LED CONTROLLER

RF 1/2 CH

Input Voltage	12-48VDC	Output Current	2x7A(12/24V) 2x5A(48V)
Input Current	14.5A	Output Power	2x(84,168,180,240)W
Output Voltage	2X(12-48)VDC	Input signal	RF 2.4Ghz

- 1/2 channel constant voltage output, control single color or color temperature low voltage LED strip.
- Match with RF 2.4G single zone or multiple zone dimming/color temperature control.
- DIPswitch to set 2 kinds of light type: DIM, CCT;
- Connect with external push switch to achieve on/off,
- Adjustment of brightness and color temperature function.

Professional series

SKU 16311

RGB LED MINI CONTROLLER

3 CH - 4.5A Output

Input Voltage	12-24VDC	Output Current	3CH,1.5A/CH
Output Voltage	12-24VDC	Output Type	Constant Voltage

- 3 channel constant voltage RGB LED mini controller.
- 3 key operation with on/off, mode and color adjustment.
- 1.5A per channel, output connect with 5 meters RGB LED strip.
- 256 levels 0-100% dimming smoothly without any flash.
- Built in 10 dynamic mode, include jump or gradual change style.

Professional series

SKU 6378



**BLUETOOTH & RF 2CH LED CONTROLLER**

2 Channels/Puch-Dim/Wireless control

Input Voltage	12-36VDC	Output Current	2CH,5A/CH
Input Current	10.5A	Output Power	2x(60-180)W
Output Voltage	2X(12-36)VDC	Output Type	Constant Voltage

- Used for control single color or color temperature LED strip.
- Tuya APP cloud control, support on/off, color temperature and brightness adjust, delay turn on/off light,
- Each controller can also work as Bluetooth-RF converter, then use Tuya APP to control one or more RF LED controlleror RF LED dimming driver synchronously.

Professional series

SKU 6384

**6 CHANNEL DMX SLIDING FADER**

6 Sliding Faders / Real DMX Value LED Screen

- Ideal Cost Efficient 6 Channel Mini DMX Fader Console
- Easy Usage
 - Suitable for permanent installations by using available brackets
 - Ideal for Sample Testing and Trouble-Shooting on-site or workshops
 - Powered by 3 x AAA Batteries or external 5-12V Power-Supply
 - 3 Digit LED Screen 0 ~100% or DMX000 ~DMX255 (Settings by internal DIP-Switch)
 - 6 Channel Mode or 5 Channel & Master Mode (Settings by internal DIP-Switch)

Professional series

SKU 6392

**WiFi & 5in1 LED Controller**

Tuya APP Cloud control/Voice control 5CH

Input Voltage	12-24VDC	Output Current	5CH,3A/CH
Input Current	15.5A	Output Power	5x(36-72)W
Output Voltage	5X(12-24)VDC	Output Type	Constant Voltage

- 5 in 1 function, used for control RGB, RGBW, RGB+CCT, color temperature or single color LED strip.
- Voice control, support amazon ECHO and TmallGenie smart speaker.
- Match with RF 2.4G remote control optional.
- Light on/off fade time 3s selectable.

Professional series

SKU 6383

**CONSTANT VOLTAGE DMX512 & RDM DECODER**

Linear or logarithmic dimming/Numeric display

- Comply with the DMX512 standard protocols.
- Digital numeric display, set DMX decode start address by buttons.
- RDM function can realize intercommunication between
- DMX decoder address can be set by DMX master console.
- 1/2/4 DMX channel output selectable.
- 16bit (65536 levels) /8bit (256 levels) grey level selectable.
- Stand-alone RGB/RGBW mode and 4 channel dimmer mode selectable, which be controlled by buttons with built-in programs, instead of DMX signal.

Professional series

SKU 6390

**CONSTANT VOLTAGE LED CONTROLLER**

4CH / Wireless remote control / Synchronize

Input Voltage	12-36VDC	Output Current	4CH,5A/CH
Input Current	20.5A	Output Power	4x(60-180)W
Output Voltage	4X(12-36)VDC	Output Type	Constant Voltage

- When using with RGB/RGBW light, built in 10 dynamic mode, include jump or gradual change style.
- Auto-transmitting function: Controller automatically transmit signal to another controller with 30m control distance.
- Synchronize on multiple number of controllers.
- Fade in and out effect selectable.

Professional series

SKU 6380

**4 WAYS DMX SIGNAL SPLITTER**

DMX512A-4 Compatible

- One DMX512 signal input, repeat four DMX512 signal output, each allowing for 32 DMX devices to be connected.
- Dedicated to amplify, distribute and insulate the signal that comes from the lighting system equipment when it is connected to the bus of DMX512(or RS-485).
- Input isolated from outputs to 500VAC, 1000VDC.
- Outputs are isolated from each other to 500VAC, 1000VDC.
- Input and outputs are ture RS-485 rated, and no microprocessors are used for maximum reliability.

Professional series

SKU 6391

**CONSTANT VOLTAGE POWER REPEATER**


4CH / PWM signal input

Input Voltage	12-36VDC	Output Current	4CH,5A/CH
Input Current	20.5A	Output Power	4x(60-180)W
Output Voltage	4X(12-36)VDC	Output Type	Constant Voltage

- Waterproof 12-36V constant voltage power repeater with IP67 rating, suitable for outdoor and damp environment.
- 4 channel, 5A per channel.
- To receive PWM signal control.
- Power repeater in series or in parallel to expand output unlimitedly.
- Apply to single color, dual color, RGB or RGBW constant voltage LED strip or module.

Professional series

SKU 6395

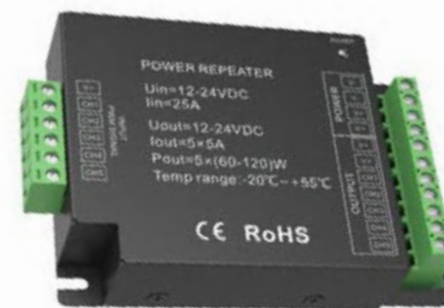**CONSTANT VOLTAGE POWER REPEATER**

5 CH / PWM signal input

Input Voltage	12-24VDC	Output Current	5CH 5A
Output Voltage	12-24VDC	Output Power	300-600W

- 12-24V constant voltage power repeater.
- 5 channel, 5A per channel.
- To receive PWM signal control.
- Power repeater in series or in parallel to expand output unlimitedly.
- Apply to RGB+CCT constant voltage LED strip or module.

Professional series

SKU 6396



CONSTANT VOLTAGE POWER REAPEATER

1 Channels / PWM signal input

Input Voltage	12-24VDC	Output Current	15A
Input Current	15.5A	Output Power	180-360W
Output Voltage	12-36VDC	Output Type	Constant Voltage

- 12-24V constant voltage power repeater.
- One channel, 15A.
- To receive PWM signal control.
- Power repeater in series or in parallel to expand output unlimitedly.
- Apply to single color constant voltage LED strip or module.

Professional series

SKU 6393



LED CONTROLLER

4 Channel x 300mA Constant Current

Output Type	Constant Current	Output Voltage	4x(12-48)VDC
Input Voltage	12-48VDC	Output Current	4CH,300mA/CH
Input Current	1.5A	Output Power	4x(3.6-14.4)W

- One RF controller accept up to 10 remote control.
- Build in 10 dynamic mode, include jump or gradual change style.
- Auto-transmitting function: Controller automatically transmit signal ot another controller with 30m control distance.
- Synchronize on multiple number of controllers.
- Connect with external push switch to achive on/off and dimming function.

Professional series

SKU 6343



CONSTANT VOLTAGE POWER REAPEATER

4 CH / 12-60V / PWM signal input

Input Voltage	12-60VDC	Output Current	4CH,5A/CH
Input Current	20A	Output Power	4x(60-300)W
Output Voltage	4X(12-60)VDC	Output Type	Constant Voltage

- 12-60V constant voltage power repeater.
- 3/4 channel, 5A max. per channel.
- To receive PWM signal control.
- Power repeater in series or in parallel to expand output unlimitedly.
- Apply to single color, dual color, RGB or RGBW constant voltage LED strip or module.

Professional series

SKU 6394



DMX512 & RDM DECODER

4 CH x 5A Constant Voltage

Output Type	Constant Voltage	Output Voltage	12-24VDC
Input Voltage	12-24VDC	Output Current	4CH,5A/CH
Input Current	20.5A	Output Power	4x(60-120)W

- Comply with the DMX512 standard protocols.
- Digital numeric dsplay, set DMX address by bottoms.
- RDM function can realize intercommunication between DMX master and decoder.
- 1/2/4 DMX chanel output selectable.
- Stand-alone RGB/RGBW mode and 4 channel dimmer mode selectable.

Professional series

SKU 6364



HIGH VOLTAGE LED STRIP CONTROLLER

3 CH / Step-less dimming / Wireless control

Input Voltage	110-240VAC	Output Current	3CH,1A/CH
Input Current	3.2A	Output Power	3x(110-240)W
Output Voltage	3X(110-240)VDC		

- 3 channel high voltage LED strip RF 2.4G controller
- Match with RF 2.4G single zone or multiple zone single color, dual color and RGB/RGBW remote control.
- One RF controller accept up to 10 remote control.
- When using with RGB light, built in 10 dynamic mode, include jump or gradual change style.

Professional series

SKU 6397



LED CONTROLLER

5 CH X 5A

Output Type	Constant Voltage	Output Voltage	5x(12-24)VDC
Input Voltage	12-24VDC	Output Current	5CH,5A/CH
Input Current	25.5A	Output Power	5x(60-120)W

- One RF controller accept up to 10 remote control.
- Build in 10 dynamic mode, include jump or gradual change style.
- Auto-transmitting function: Controller automatically transmit signal ot another controller with 30m control distance.
- Synchronize on multiple number of controllers.
- Connect with external push switch to achive on/off and dimming function.

Professional series

SKU 6366



LED CONTROLLER

4 CH x 5A / RF2.4 GHz + Push

Input Voltage	12-36VDC	Output Current	4CH,5A/CH
Input Current	20.5A	Output Power	4x(60-180)W
Output Voltage	4x(12-36)VDC	Output Type	Constant Voltage

- One RF controller accept up to 10 remote control.
- Build in 10 dynamic mode, include jump or gradual change style.
- Auto-transmitting function: Controller automatically transmit signal ot another controller with 30m control distance.
- Connect with external push switch to achive on/off and dimming function.

Professional series

SKU 6342



0/1-10V DIMMING DRIVER

1 CH 12A

Input Voltage	12-36VDC	Output Voltage	12-36VDC
Input Current	12.5A	Output Current	1CH,12A
Input Signal	0/1-10V+Push	Output Power	144-432W

- Match with OPTONICA Professional Series Remote Controls.
- 1 channel 0/1-10V LED dimming driver with push-dim function.
- 1 channel 0/1-10V input, 1 channel PWM constant voltage output.
- 0~100% dimming range via logarithmic characteristic can be very comfortable for human eyes.

Professional series

SKU 6367



0/1-10V LED DIMMING DRIVER

4 CH x 5A

Input Voltage	12-36VDC	Output Voltage	12-36VDC
Input Current	20.5A	Output Current	4CH,5A/CH
Input Signal	0/1-10V+Push	Output Power	4x(60-180)W

- Match with OPTONICA Professional Series Remote Controls.
- 4 channel 0/1-10V LED dimming driver with push-dim function.
- 4 channel 0/1-10V input, 4 channel PWM constant voltage output.
- 0~100% dimming range via logarithmic characteristic can be very comfortable for human eyes.

Professional series

SKU 6369



LED CONTROLLER

3CH x 4A

Input Voltage	12-24VDC	Output Voltage	3X(12-24)VDC
Input Current	12.5A	Output Current	3CH,4A/CH
Input Signal	RF2.4Ghz	Output Power	144/288W

- Match with OPTONICA Professional Series Remote Controls.
- One RF controller accept up to 10 remote control.
- Build in 10 dynamic mode, include jump or gradual change style.
- Auto-transmitting function: Controller automatically transmit signal of another controller with 30m control distance.
- Synchronize on multiple number of controllers.

Professional series

SKU 6353



DALI LED DIMMER

1CH 15A

Input Voltage	12-24VDC	Output Voltage	12-24VDC
Input Current	15A	Output Current	1CH,15A
Input Signal	DALI+Push	Output Power	180W/360W

- Match with OPTONICA Professional Series Remote Controls.
- Constant voltage DALI LED dimmer with 1 channel, 15A output.
- DALI address will be automatically assigned by DALI master, 1 DALI address.
- PWM digital dimming, standard DALI logarithmic dimming curve.
- Connect with external push switch to achive on/off and dimming function.

Professional series

SKU 6371



LED FADE IN/OUT PUSH DIMMER

1CH x 8A

Input Voltage	12-24VDC	Output Voltage	1X(12-24)VDC
Input Current	8A	Output Current	8A/CH
Input Signal	RF2.4Ghz	Output Power	96/192W

- Fade-in Fade-out LED dimmer with smooth fading effect for soft start and stop
- The fading speed can be set via knob potentiometer, 1S, 3S, 5S, 10S, 20S selectable.
- Connect with self-resetting metal button or push switch to achieve on/off and 0-100% dimming function.
- Push input can accept either positive or negative trigger.

Professional series

SKU 6321



DALI LED DIMMER

4CH x 5A

Input Voltage	12-24VDC	Output Voltage	12-24VDC
Input Current	20.5A	Output Current	4CH,5A/CH
Input Signal	DALI	Output Power	4x(60-120)W

- Match with OPTONICA Professional Series Remote Controls.
- 4 channel channel constant voltage DALI LED Dimmer, 5A per chanel.
- 4 DALI address, 4 channel work separately.
- DALI address will be automatically assigned by DALI master.
- PWM digital dimming, standard DALI logarithmic dimming curve.

Professional series

SKU 6372



LED CONTROLLER

1CH x 8A

Input Voltage	5-36VDC	Output Voltage	1X(5-36)VDC
Input Current	8.5A	Output Current	1CH,8A
Input Signal	RF2.4Ghz	Output Power	40W/96W/192W/288W

- 4096 levels 0-100% dimming smoothly without any fash.
- One RF controller accept up to 10 remote control.
- Match with RF 2.4G single zone or multiple zone dimming remote control.
- Auto-transmitting function: Controller automatically transmit signal to another controller with 30m control distance.
- Synchronize on multiple number of controllers.

Professional series

SKU 6322



AC TRIAC DALI DIMMER

4 CH x 5A / RF2.4 GHz + Push

Input Voltage	AC100-240V	Output Voltage	AC100-240V
Dimming level	256 levels	Output Current	Max 1.5A
		Output Power	150-360W

- AC phase-cut DALI dimmer, one DALI address, one channel output.
- DALI address can be manually assigned and shown in digital display or automatically assigned by DALI master.
- Reverse-phase dimming or forward-phase dimming selectable.
- To dim and switch single color dimmable LED lamps, traditional incandescent and halogen lights.

Professional series

SKU 16302



RGB/RGBW SPI LED CONTROLLER

1CH x 8A

Input Voltage	5-25VDC	Input Signal	Tuya App + RF 2.4Ghz
Input Current	8A	Output Signal	SPI(TTL)x2

- Multi-pixel RGB/RGBW LED strip controller with SPI signal output, Tuya APP cloud control.
- Voice control, support for Amazon ECHO, Google, Tmall Genie and Xiaodu smart speakers.
- Compatible with 45 kinds of RGB or RGBW LED strips.
- Rich dynamic effects: 44 default and 104 custom dynamic scenarios, 16 variations.
- Match with RF 2.4G RGB remote control.

Professional series

SKU 6352






LED CONTROLLER
4 CH x 5A

Input Voltage	12-24VDC	Output Voltage	4x(12-24)VDC
Input Current	20.5A	Output Current	4CH,5A/CH
IP Rating	IP20	Output Power	4x(60-120)W

- Digital numeric display and easy key operation.
- Can set as 1 channel dimmer, 4 channel, dual color, RGB or RGBW controller.
- Logarithmic or linear dimming curve selectable.
- Synchronize on multiple number of controllers.

Professional series
SKU 6355

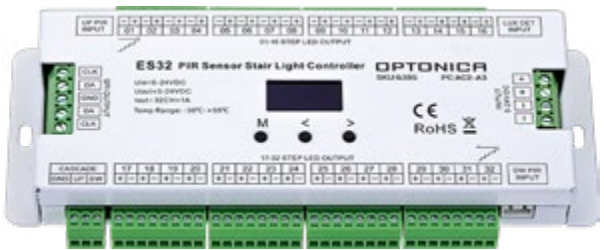

PIR SENSOR STAIR LIGHT CONTROLLER
PIR Sensor / Daylight sensor / Max 32 Step

Input Voltage	5-24VDC	Output Current	32CH,1A/CH
Output Voltage	32 x (5-24)VDC	Output Power	32 x (5-24)W
Output Type	Constant Voltage+SPI(TTL)		

- Multiple function PIR sensor stair light controller with daylight sensor.
- 32 channels constant voltage output drive low voltage LED strip, Max. 1A
- Built-in multiple color mode, speed and brightness 1-8 grade adjustable.
- Push switch can also be as induction signal input.
- With fast self-testing function.
- Any damaged LED channel in 32 channels can be set disable.

Professional series
SKU 6385



AC TRIAC DIMMER
RF 2.4GHz

Input Voltage	100-240VAC	Output Voltage	100-240VAC
Input Signal	RF2.4GHz+Push	Output Current	1CH,2A/CH
IP Rating	IP20	Output Power	200-480W

- RF+ Push AC phase-cut dimmer, 1channel output.
- Digital numeric display , set brightness by bottoms.
- 0-100% dimming smoothly without any flash.
- Reverse-phase dimming or forward-phase dimming selectable.
- Minimum brightness set from 1% to 40%

Professional series
SKU 6365



DMX512 /0-10V TO TRIAC DIMMER
RDM/Stand-alone function/Numeric display

Input Voltage	100-240VAC	Output Current	1CH,6A/CH
Output Voltage	100-240VAC	Output Power	600-1440W

- AC phase-cut mosfet dimmer with DMX512 function, one channel output.
- Comply with the DMX512 standard protocols.
- Digital numeric display, set DMX decode start address by bottoms.
- Reverse-phase dimming or forward-phase dimming selectable.
- Minimum brightness set from 1% to 40%.
- Stand-alone dynamic mode and dimmer mode selectable, which be controlled by buttons with built-in programs, instead of DMX signal.

Professional series
SKU 6389



POWER REPEATER
4CH x 5A

Input Voltage	12-24VDC	Output Voltage	4x(12-24)VDC
Input Current	20.5A	Output Current	4CH,5A/CH
IP Rating	IP20	Output Power	4x(60-120)W

- To receive PWM signal control.
- Power repeater in serie or in parallel to expand output unlimitedly.
- Apply to single color,dual color,RGB or RGBW constant voltage LED strip or module.
- 3KV Optoelectronic isolation.

Professional series
SKU 6370



HIGH VOLTAGE DMX 512 DECODER
3CH / RDM Stand-alone function / Numeric display

Input Voltage	100-240VAC	Output Current	3CH,1.5A/CH
Output Voltage	100-240VAC	Output Power	3x(165-360)W

- Comply with the DMX512 standard protocols.
- Digital numeric display, set DMX decode start address by buttons.
- RDM function can realize intercommunication between DMX master and decoder
- 1/3 DMX channel output selectable.
- PWM frequency 1000/2000/4000/8000Hz selectable.
- Logarithmic or linear dimming curve selectable.
- Match with RF 2.4G single zone or multiple zone RGB remote control optional.

Professional series
SKU 6330



WiFi RELAY 2.4GHz
WiFi to RF Converter

Input Voltage	5-24VDC	Output Control	RGB,RGBW,CT
Wifi standard	802.11 b/g/n	Working Temp.	-20°C~50°C
Dimension	ø72x25 mm	Platform	iOS , Android



Professional series
SKU 6354



LED CONTROLLER
3 CH X 10A

Input Voltage	12-36VDC	Output Voltage	3x(12-36)VDC
Input Current	30.5A	Output Current	3CH,10A/CH
Input Signal	RF2.4Ghz	Output Power	3x(120-360)W

- One RF controller accept up to 10 remote control.
- Build in 10 dynamic mode, include jump or gradual change style.
- Auto-transmitting function: Controller automaticly transmit signal ot another controller with 30m control distance.
- Synchronize on multiple number of controllers.

Professional series
SKU 6356



RF SIGNAL REPEATER

AC or DC input / Wall junction box mounting

Input Voltage	12-24VDC ; 100-240VAC		
Input/Output	RF 2.4GHz	RF Control Distance	30m

- Apply for wireless signal extension, greatly ensures RF communication stability and wide controlling area.
- Powered by AC100-240V or DC12-24V.
- Compatibility with RF 2.4G remote control.
- Easy to be placed in standard wall junction box.

Professional series

SKU 6382



POWER REPEATER

5 CH x 5A

Input Voltage	12-24VDC	Output Current	5CH 5A
Output Voltage	12-24VDC	Output Power	300-600W

- 12-24V constant voltage power repeater.
- 5 channel, 5A per channel.
- To receive PWM signal control.
- Power repeater in series or in parallel to expand output unlimitedly.
- Apply to RGB+CCT constant voltage LED strip or module.

Professional series

SKU 6373



WiFi & RF AC TRIAC DIMMER

Voice Control/RF Dimming/Push Dim

Input Voltage	AC100-240V	Output Current	MAX 1.5A
Output Voltage	AC100-240V	Output Power	150-360W

- WiFi + RF + Push AC phase-cut dimmer, 1 channel output.
- Voice control, support amazon ECHO and TmallGenie smart speaker.
- 256 levels 0-100% dimming smoothly without any flash.
- Compatibility with RF 2.4G single zone or multiple zone dimming remote control.
- Easy to be placed in standard wall junction box behind a push switch.
- Over-heat / Over-load protection, recover automatically.

Professional series

SKU 6388



SINGLE COLOR LED CONTROLLER

1 CH x 20A

Input Voltage	12-48VDC	Output Current	1CH 20A
Output Voltage	12-48VDC	Output Power	240-480W

- RF remote, 0/1-10V, Push Dim (3-in-1) dimming.
- Match with RF 2.4G single zone or multiple zone dimming remote control.
- One RF controller accept up to 10 remote control.
- Synchronize on multiple number of controllers.
- Connect with external push switch to achieve on/off and 0-100% dimming function.
- Over-heat / Over-load / Short circuit protection, recover automatically

Professional series

SKU 16301



AC TRIAC RF DIMMER

RF 2.4 GHz + Push

Input Voltage	100-240VAC	Output Voltage	100-240VAC
Input Signal	RF2.4GHz+Push	Output Current	MAX 1A
IP Rating	IP20	Output Power	100-240W

- Match with OPTONICA Professional Series Remote Controls.
- RF+ Push AC phase-cut dimmer, 1channel output.
- 0-100% dimming smoothly without any flash.
- Connect with external push switch to achive ON/OFF and dimming function.
- Easy to be inserted into standard 86x86mm wall box

Professional series

SKU 6363



AC TRIAC RF DIMMER

RF 2.4 GHz + Push

Input Voltage	100-240VAC	Output Voltage	100-240VAC
Input Signal	RF2.4GHz+Push	Output Current	MAX 1A
IP Rating	IP20	Output Power	100-240W

- Match with OPTONICA Professional Series Remote Controls.
- RF+ Push AC phase-cut dimmer, 1channel output.
- 0-100% dimming smoothly without any flash.
- Connect with external push switch to achive ON/OFF and dimming function.
- Easy to be inserted into standard 86x86mm wall box

Professional series

SKU 16305



RF TO 1 CH LED DIMMER

0/1-10V RF + Push

Input Voltage	100-240VAC	Output Signal	0/1-10V (20mA)
Input Signal	RF2.4GHz+Push	Output Current	MAX 3A AC
IP Rating	IP20	Relay surge current	200A

- 0/1-10V RF or AC push dimmer, 1 channel output.
- Output 1 channel 0/1-10V signal, connect with 0/1-10V dimmable driver.
- High voltage AC input, high voltage AC relay output, with zero-crossing detection.
- 0-10V or 1-10V output selectable by DIP switch.
- 256 levels 0-100% dimming smoothly without any ash.
- Connect with external push switch to achieve on/off and 0-100% dimming function.

Professional series

SKU 16303



Wireless Remote Control Switch

3 Way LED-200W

Power LED	3x200W	Range	0-15M
Input Voltage	220-240VAC	Dimension	42x110mm
IP Rating	IP20	Remote Control	YES

- This product is a remote control switch for lighting fixtures, which can be remotely controlled and has a wide range of applications. It can be used for various lighting products.

SKU 16304



LED STRIP DIMMER

With Remote control 8 A

Power	96W-192W
Output Current	8A
Voltage	12V / 24V
IP Rating	IP20
Dimension	80x55x30mm

SKU

6302



LED STRIP REMOTE CONTROL

RGB - 4 Buttons 3x4A

Power	144W-288W
Output Current	3x4A
Voltage	12V / 24V
IP Rating	IP20
Dimension	105x65x20mm

SKU

6304



LED STRIP REMOTE CONTROL

RGB - 16 Buttons 3x2A

Power	72W
Output Current	3x2A
Voltage	12V
IP Rating	IP20
Dimension	50x35x20mm

SKU

6303



LED STRIP REMOTE CONTROL

RGB - 44 Buttons

Power	72W	144W
Output Current	6A	12A
Voltage	12V	12V
IP Rating	IP20	IP20
Dimension	50x35x20mm	50x35x20mm

SKU

6306

6307



WiFi CONTROLLER

RGB / Single Color 3x4A

Power	90W-288W	90W-288W
Output Current	12A	12A
Voltage	7.5V-24V	7.5V-24V
IP Rating	IP20	IP20
Strip Type	RGB	Single Color
Dimension	80x55x30mm	80x55x30mm

SKU

6310

6311



AMPLIFIER FOR LED STRIPS

RGB - Iron shell 3x8A

Power	288W-576W
Output Current	3x8A
Voltage	12V / 24V
IP Rating	IP20
Dimension	80x70x30mm

SKU

6326



AMPLIFIER FOR LED STRIP

RGB - WHITE 4x6A

Power	288W-576W
Output Current	4x6A
Voltage	12V-24V
IP Rating	IP20
Dimension	66x55x20mm

SKU

6328



AMPLIFIER FOR LED STRIP

RGB 3x4A

Power	144W-288W
Output Current	3x4AA
Voltage	12V-24V
IP Rating	IP20
Dimension	106x64x23.5 mm

SKU

6305



KINETIC SET
Remote Control Switch & Controller

Input Voltage	AC100-240V50Hz	Material	Plastic
Input Voltage	433Mhz	On/Off Cycles	100000x
Maximum Load	600W(Each gang)	IP Rating	IP20

	1-GANG		2-GANG	
SKU	7651	7652	7653	7654
Color	White	Black	White	Black



LED STRIP REMOTE CONTROL
RGB Touch 3x6A White / Black

Power	216W-432W	216W-432W
Output Current	3x6A	3x6A
Voltage	12V / 24V	12V / 24V
IP Rating	IP20	IP20
Body Color	White	Black
Dimension	95x50x30mm	95x50x30mm

SKU	6314	6315
-----	------	------

IP20



KINETIC SET - WiFi ,TUYA App
Remote Control Switch & Controller

Input Voltage	AC100-240V50Hz	Material	Plastic
Input Voltage	433Mhz	On/Off Cycles	100000x
Maximum Load	150W(Each gang)	IP Rating	IP20

	1-GANG	
SKU	7655	7656
Color	White	Black

tuya



LED STRIP REMOTE CONTROL
RGBW Touch 4x6A

Power	288W-576W
Output Current	4x6A
Voltage	12V / 24V
IP Rating	IP20
Dimension	80x45x15mm

SKU	6329
-----	------

IP20



SENSOR DIMMER
Wall Maunted 10A

Power	120W-240W
Output Current	10A
Voltage	12V / 24V
IP Rating	IP20
Body Color	White
Dimension	85x85x40mm

SKU	6320	6318
Color	White	Black

IP20



MUSIC LED CONTROLLER
With Remote control 3x4A

Power	144W-288W
Output Current	3x4A
Voltage	12V-24V
IP Rating	IP20
Dimension	170x85x23mm

SKU	6312
-----	------

IP20



SENSOR DIMMER
Wall Maunted RGB 3x4A

Power	120W-240W
Output Current	3x4A
Voltage	12V / 24V
IP Rating	IP20
Body Color	White
Dimension	85x85x40mm

SKU	6319	6317
Color	White	Black

IP20




DMX512 DECODER
3x4A

Power	144W-288W
Output Current	3x4A
Voltage	12V-24V
IP Rating	IP20
Dimension	160x60x42mm

SKU	6308
-----	------

IP20

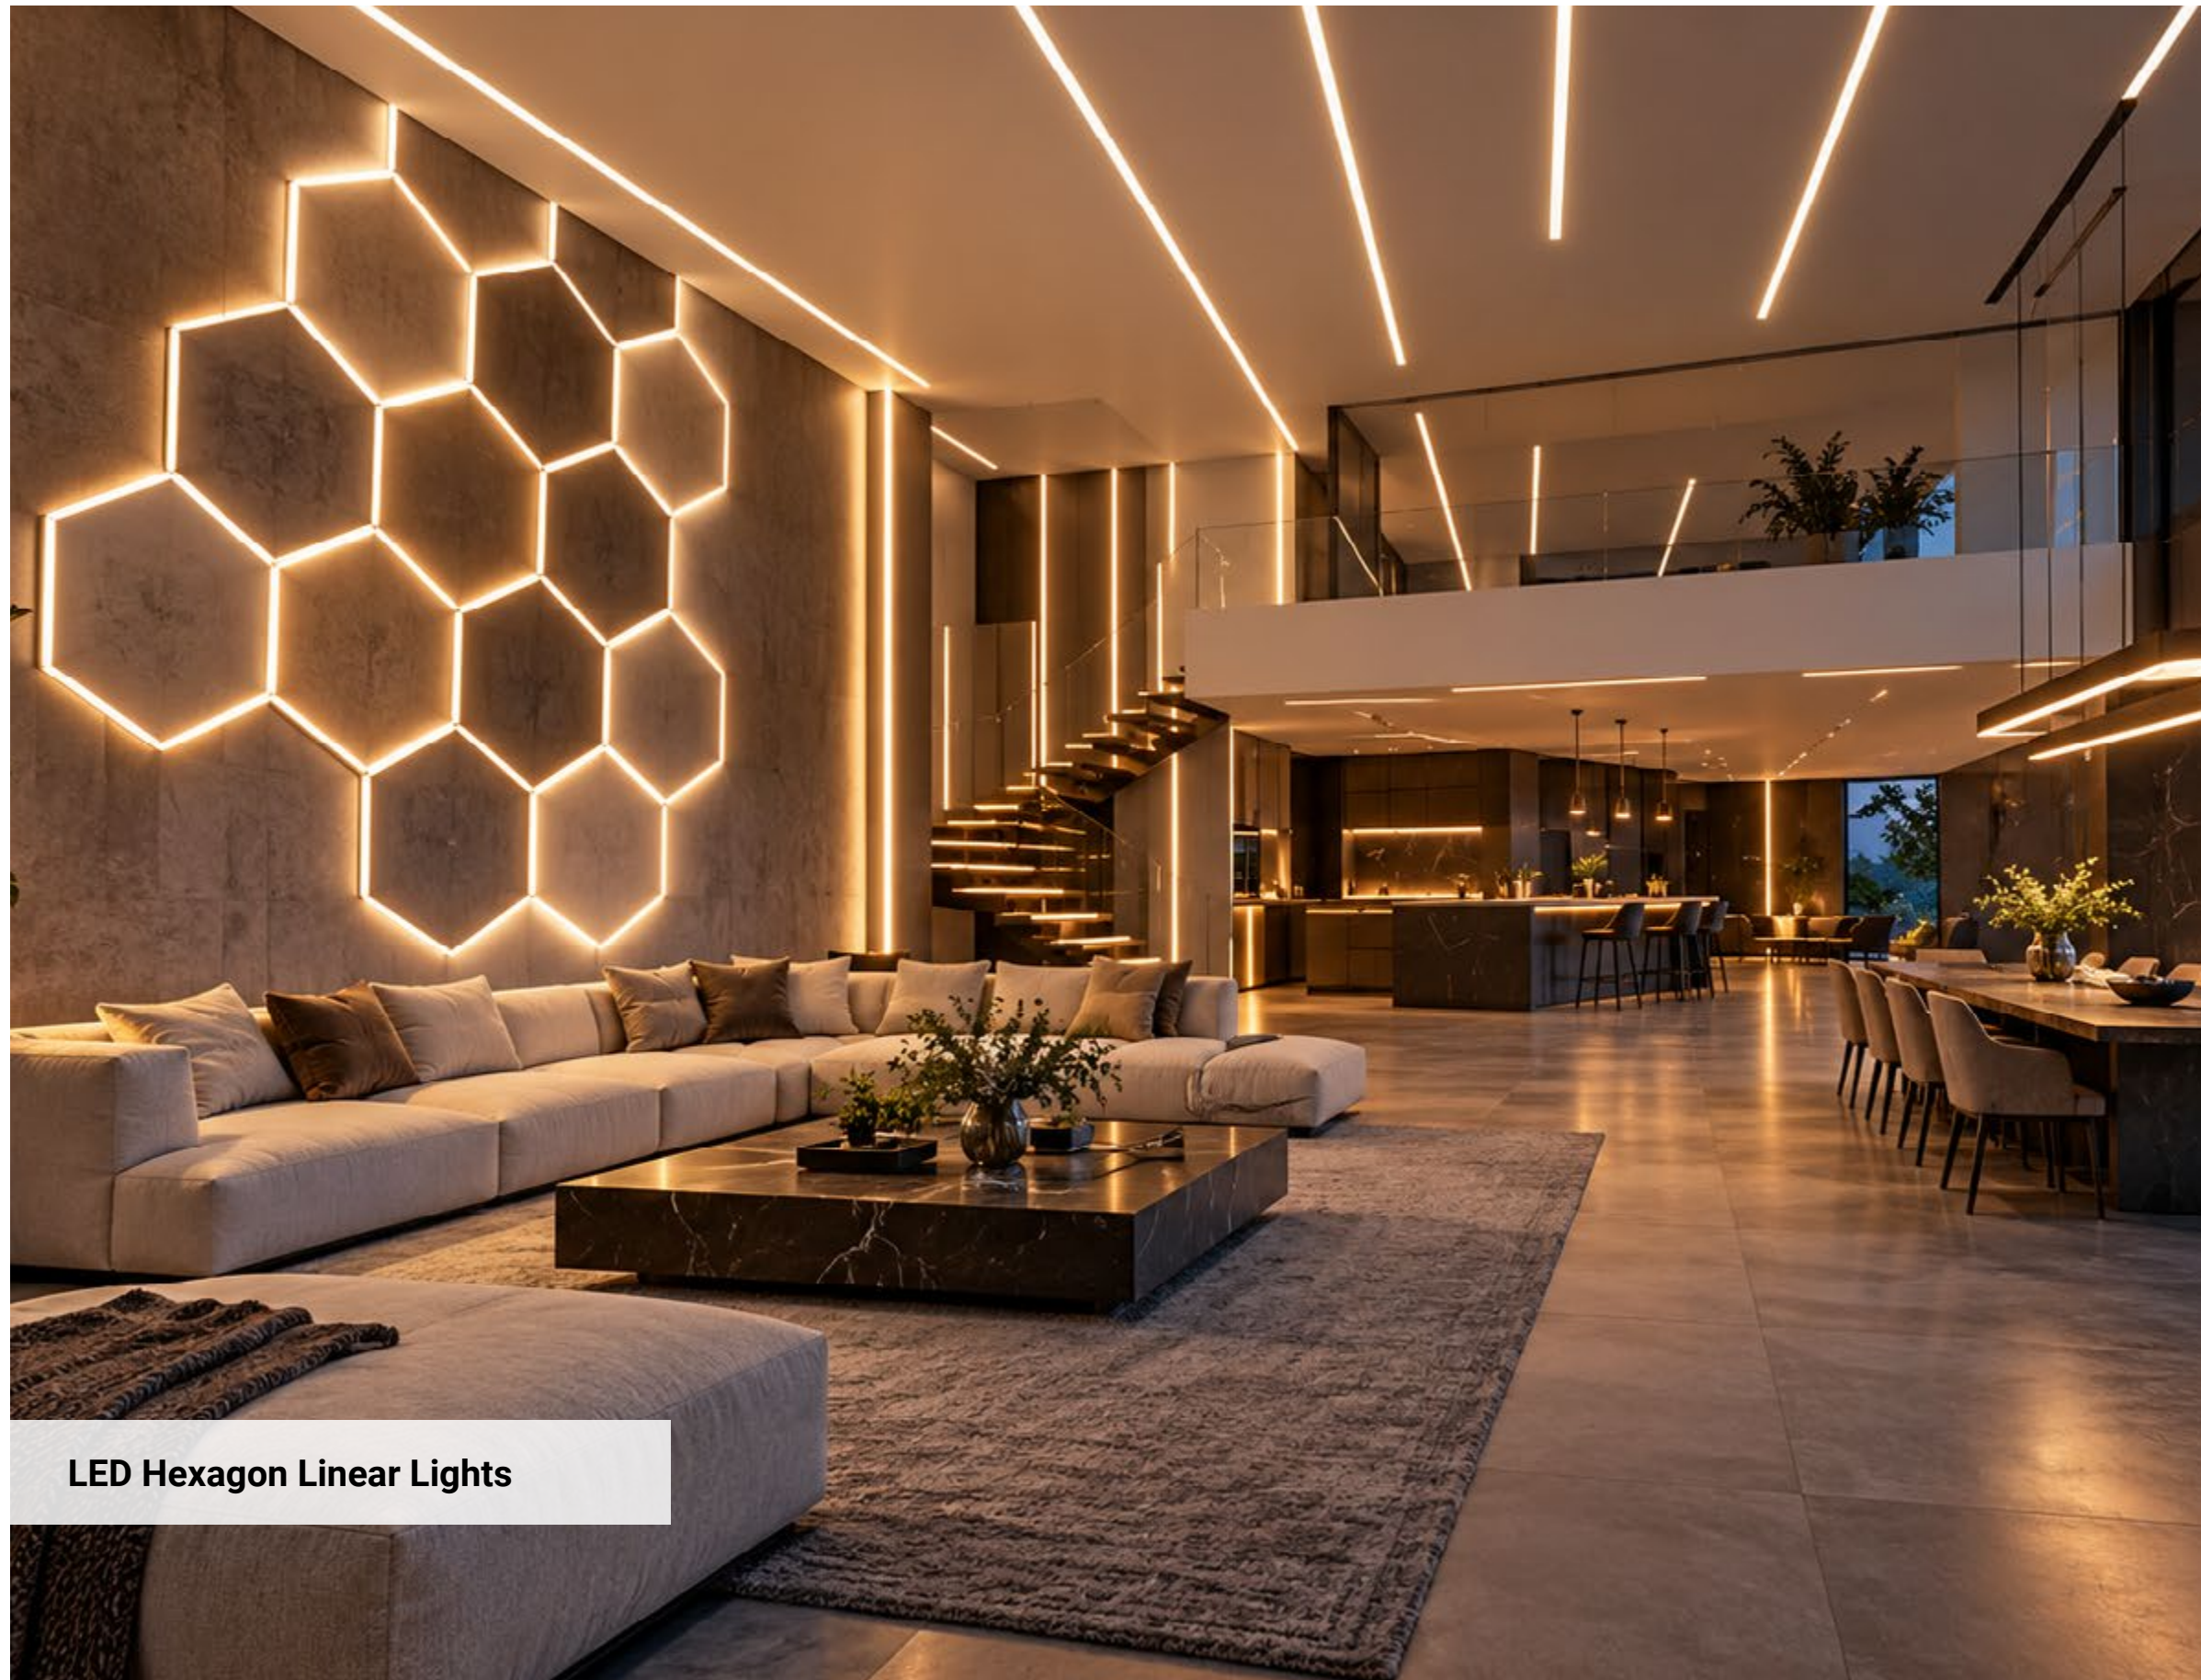

LED Hexagon Linear Lights

LED linear and track lights are highly specialized luminaires, designed to deliver concentrated light distribution for retail, galleries, and other presentation spaces. With adjustable fixtures and versatile three-phase track systems, they adapt seamlessly to different layouts – from elegant showrooms to large-scale trade fair halls and shopping malls.

Features:

- Available in multiple colour temperatures to suit diverse display needs
- Up to 80% energy savings compared to conventional lighting
- Adjustable, modular design for flexible layouts
- Quick and secure installation with foolproof connectors
- Durable construction for long-term use

Applications:

- Retail stores, supermarkets, and shopping malls
- Showrooms, exhibition halls, and trade fairs
- Art galleries and museums
- Stylish accent lighting for dining rooms or residential interiors
- Popular for both commercial and decorative projects



LED LINEAR LIGHT



LED LINEAR LIGHT 120CM

NEW

3CCT + HONEY COMB REFLECTOR

Power	38W	Beam Angle	120°
Input Voltage	AC220-240V	CRI	Ra>80
Lumens	3800lm	IP Rating	IP20
Size	1200x35x70mm	Dimmable	No

SKU	16776
Color	Black



65315
Connector

LED LINEAR LIGHT - SLIM	
PREMIUM LINE	
Ceiling mounting or cable suspension	
Power	40W
Input Voltage	220-240V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimension	1200x50x70mm

SKU	Body	Lumen	Colour
5472	White	4000lm	6000K
5382	White	4000lm	4000K
5470	Black	4000lm	6000K
5380	Black	4000lm	4000K
5471	Gray	4000lm	6000K
5381	Gray	4000lm	4000K

Linkable



ACCESSORIES

	White	White	Black	Black	Grey
SKU	5062	5029	5060	5027	5061
Color	6000K	4000K	6000K	4000K	6000K

	White	White	Black	Black	Grey
SKU	5065	5037	5063	5030	5064
Color	6000K	4000K	6000K	4000K	6000K

	White	White	Black	Black	Grey
SKU	5068	5040	5066	5038	5067
Color	6000K	4000K	6000K	4000K	6000K



5 Years Warranty

Linkable

	White	Black	Gray
SKU	5385	5383	5384
Color	4000K	4000K	4000K

LED LINEAR LIGHT

PREMIUM LINE

UP & DOWN - LINKABLE

Power	50W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	5000lm	IP Rating	IP20
Size	1200x72x30mm	Dimmable	No





CCT Switch

	White	Black	Silver	Wood	Champagne
SKU	16772	16771	16773	16774	16775
Color	CCT	CCT	CCT	CCT	CCT

LED LINEAR LIGHT 3CCT

COLOR PLASTIC SERIES

Power	38W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	3800lm	IP Rating	IP20
Size	1200x70x35mm	Dimmable	No





5 Years Warranty

UGR<19

Linkable

	White	Black	Gray
SKU	5388	5386	5387
Color	4000K	4000K	4000K

5047 Connector

LED LINEAR LIGHT

PREMIUM LINE

UGR<19 - LINKABLE

Power	50W	Beam Angle	60°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	4500lm	IP Rating	IP20
Size	1240x72x53mm	Dimmable	No





3 Years Warranty

	Black	White
SKU	5478	5479
Color	4000K	4000K

65316 Suspension Kit for Linear Lights

LED LINEAR LIGHT

NON-LINKABLE

Power	40W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	4400lm	IP Rating	IP20
Size	1200x60x57mm	Dimmable	No





CCT Switch

New Generation

120 Lumens/W

NEW

HEXAGON SET LIGHTS 3CCT	
3000K / 4000K / 6000K	
Input Voltage	165-265V 50/60Hz
Beam Angle	180°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

	1 Hex	5 Hex	8 Hex	8 Hex	11 Hex	14 Hex
SKU	Watt	Lumen	Nu	Color	Dimension	
16831	42W	5040lm	1 HEX	3CCT	827x920mm	
16832	192W	23040lm	5 HEX	3CCT	2333x163mm	
16833	280W	33600lm	8 HEX	3CCT	2333x2434mm	
16834	259W	46200lm	8 HEX	3CCT	1680x3690mm	
16835	385W	54720lm	11 HEX	3CCT	2333x3238mm	
16836	456W	46200lm	14 HEX	3CCT	2290x3150mm	



RGB


New Generation

tuya

NEW

HEXAGON SET LIGHTS RGB	
Tuya - APP Control - Remote Control	
Input Voltage	DC24V
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	Yes

 5 Hex	 8 Hex	 11 Hex	 14 Hex		
SKU	Watt	Lumen	Nu	Color	Dimension
16841	72W	7200lm	5 HEX	MAGIC RGB	2180x1500mm
16842	105W	10500lm	8 HEX	MAGIC RGB	2400x2200mm
16843	138W	13800lm	11 HEX	MAGIC RGB	2980x2180mm
16844	138W	13800lm	14 HEX	MAGIC RGB	3720x2180mm

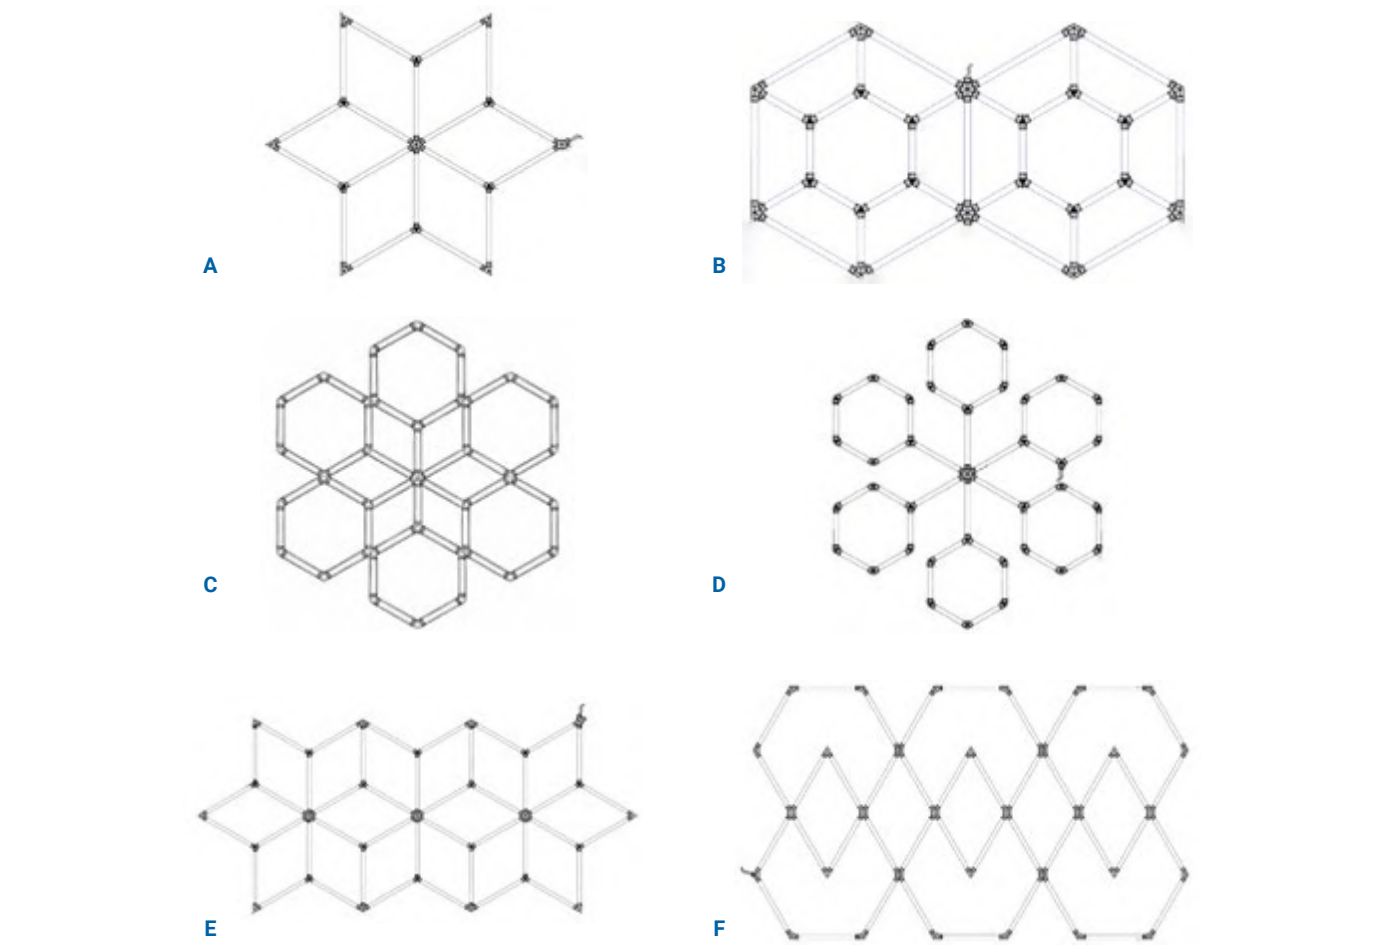

Linkable

New Generation


120 Lumens/W

HEXAGON SET LIGHTS	
LINKABLE	
Input Voltage	220-240V 50/60Hz
Beam Angle	180°
CRI	Ra>80
IP Rating	IP20
Dimmable	No


	SKU	Watt	Lumen	Nu	Color	Dimension
A	16821	126W	15120lm	6 Shape	6000K	1660x1400mm
B	16822	315W	37800lm	14 Shape	6000K	3016x1900mm
C	16823	294W	35280lm	12 Shape	6000K	2820x2440mm
D	16824	306W	36720lm	6 Shape	6000K	3070x2600mm
E	16825	294W	35280lm	16 Shape	6000K	3300x1450mm
F	16826	428W	51360lm	11 Shape	6000K	2850x1620mm



HEXAGON SET LIGHTS	
LINKABLE	
Input Voltage	220-240V 50/60Hz
Beam Angle	180°
CRI	Ra>80
IP Rating	IP20
Dimmable	No



1 Hex




5 Hex



8 Hex



11 Hex



14 Hex

SKU	Watt	Lumen	Nu	Color	Dimension
16801	42W	5040lm	1 HEX	6000K	1000x820mm
16802	192W	23040lm	5 HEX	6000K	1580x2290mm
16803	280W	33600lm	8 HEX	6000K	2370x2290mm
16804	385W	46200lm	11 HEX	6000K	2290x3150 mm
16805	456W	54720lm	14 HEX	6000K	2430x4835 mm

SKU 16814 V-CONNECTOR



SKU 16817 T-CONNECTOR




SKU 16815 L-CONNECTOR



SKU 16818 X-CONNECTOR




SKU 16816 Y-CONNECTOR

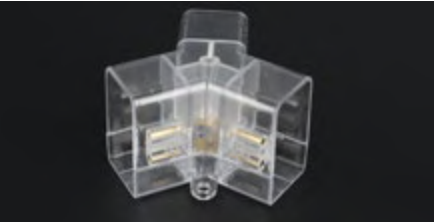

SKU 16819 LINE-CONNECTOR



SKU	Watt	Lumen	Lumen/W	Color	Dimension
16811	7W	840lm	120lm/W	6000K	440mm
16812	9W	1080lm	120lm/W	6000K	570mm
NEW 16830	7W	840lm	120lm/W	3CCT	440mm
16813	INPUT CABLE 0.5M				

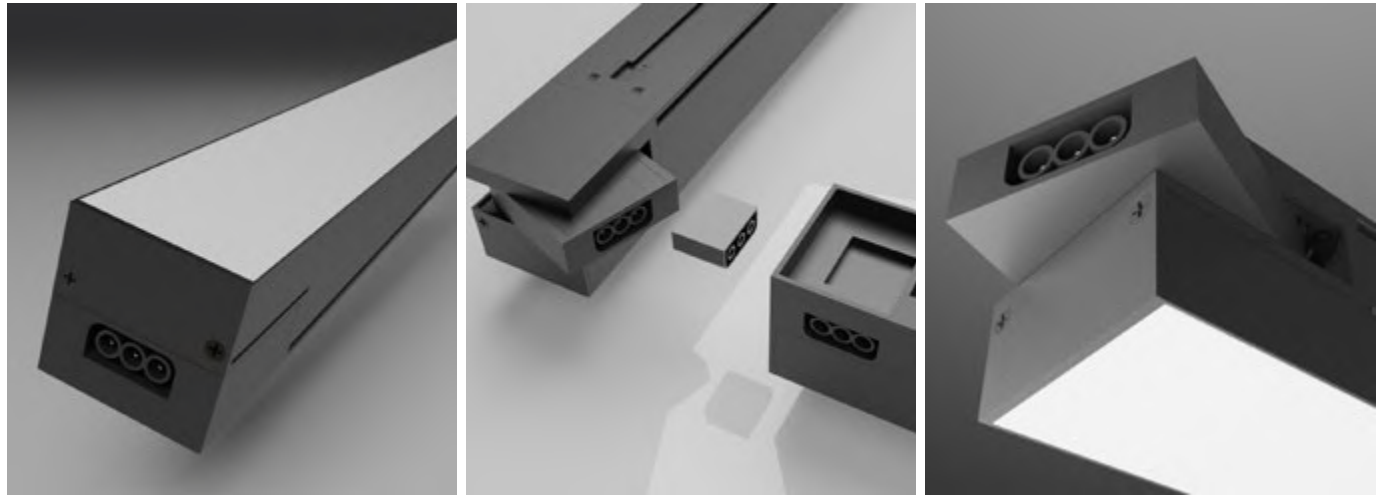

LED LINEAR LIGHT 3CCT	
LINKABLE	
Input Voltage	220-240V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

ACCESSORIES

SKU 16764 Hanging Accessories



SKU 16767 Input Cable 0.3m



SKU	Watt	Lumen	Lumen/W	Color	Dimension
16761	24W	2400lm	100lm/W	3CCT	600x55x55mm
16762	36W	3600lm	100lm/W	3CCT	900x55x55mm
16763	50W	5000lm	100lm/W	3CCT	1200x55x55mm
NEW 16760	80W	8000lm	100lm/W	3CCT	2000x55x55mm


SKU 16765 Installation Accessories



SKU 16768 Input Cable 1.5m



SKU 16766 Exposed Mounting





SKU16751

Color4000K

SKU16752

Link Connector





LED LINEAR FIXTURE			
Linkable			
Power	50W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	9500lm	IP Rating	IP20
Size	1605x94x84mm	Dimmable	No





SKU5153

SKU5156

SKU5154

SKU5155

Size1m

Size2m

Size1m

Size2m

TRACK SYSTEM			
1 Phases/2 Wires			
Input Voltage	AC220-240V 50Hz	IP Rating	IP20
Size	1000x40x20mm	Material	ALU





SKU5157

Straight Connector White



SKU5159

Straight Connector Black



SKU5158

Angle Connector White



SKU5160

Angle Connector Black



SKU5049

Suspension for 3-Phase Tracks



SKU5048

Suspension for 3-Phase Tracks



SKU5059

Adapter for 3-Phase Tracks



SKU5069

Adapter for 3-Phase Tracks



SKU5007

SKU5008

SKU5009

SKU5010

Size1m

Size2m

Size1m

Size2m

TRACK SYSTEM			
3 Phases/4 Wires - including connection and end piece			
Input Voltage	AC220-240V 50Hz	IP Rating	IP20
Size	1000x40x35mm	Material	ALU





SKU5019

L-Feeder White



SKU5020

L-Feeder Black



SKU5013

Straight Connector White



SKU5014

Straight Connector Black



SKU5011

Mini Straight Connector White



SKU5012

Mini Straight Connector Black



SKU5015

L-Connector White



SKU5016

L-Connector Black



SKU5017

T-Connector White



SKU5018

T-Connector Black



SKU5021

X-Connector White



SKU5022

X-Connector Black



SKU5025

Flexible Connector White



SKU5026

Flexible Connector Black



SKU5023

End Cap For Track White



SKU5024

End Cap For Track Black



	White	White	Black	Black	
SKU	15103	15104	15101	15102	
Color	4000K	2700K	4000K	2700K	

LED COB TRACK LIGHT

For 1 Phase Track System

Power	12W	Beam Angle	24°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	1200lm	IP Rating	IP20
Size	ø50x130mm	Dimmable	No







	White	Black	
SKU	15106	15105	
Color	CCT	CCT	 

LED COB TRACK LIGHT CCT

For 4 Line Track System

Power	20-25-30W Adjustable	Beam Angle	24°-90°
Input Voltage	AC220-240V 50Hz	CRI	Ra>90
Lumens	2700lm	IP Rating	IP20
Size	ø72x145x118mm	Dimmable	No





	For 2 Line Tracks		For 4 Line Tracks	
SKU	2019	2020	2017	2018
Color	White	Black	White	Black

LED TRACK LIGHT GU10 - Socket

For 2/4 Line Track System

Socket	1xGU10	Material	Plastic/Alu
Input Voltage	AC220-240V 50Hz	Max Power	10W / 35W
Size 2 line	ø60x90mm	IP Rating	IP20
Size 4 line	ø55x80mm		







LED COB TRACK LIGHT

For 4 Line Track System

Input Voltage	220-240V 50/60Hz
Beam Angle	24°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Body Color	Color	Dimension
5321	25W	2750lm	White	5000K	225x260/80x146mm
5322	25W	2750lm	White	4000K	225x260/80x146mm
5323	25W	2750lm	White	3000K	225x260/80x146mm
5324	35W	3850lm	White	5000K	220x265/92x160mm
5325	35W	3850lm	White	4000K	220x265/92x160mm
5326	35W	3850lm	White	3000K	220x265/92x160mm
5327	25W	2750lm	Black	5000K	225x260/80x146mm
5328	25W	2750lm	Black	4000K	225x260/80x146mm
5329	25W	2750lm	Black	3000K	225x260/80x146mm
5330	35W	3850lm	Black	5000K	220x265/92x160mm
5331	35W	3850lm	Black	4000K	220x265/92x160mm
5332	35W	3850lm	Black	3000K	220x265/92x160mm






LED WALL WASHER FOR TRACKS

For 4 Line Track System

Input Voltage	220-240V 50/60Hz
Beam Angle	24°
CRI	Ra>80
IP Rating	IP20
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
5389	30W	2700lm	80m/W	4000K	605x93x42mm
5390	40W	3600lm	80lm/W	4000K	905x93x42mm



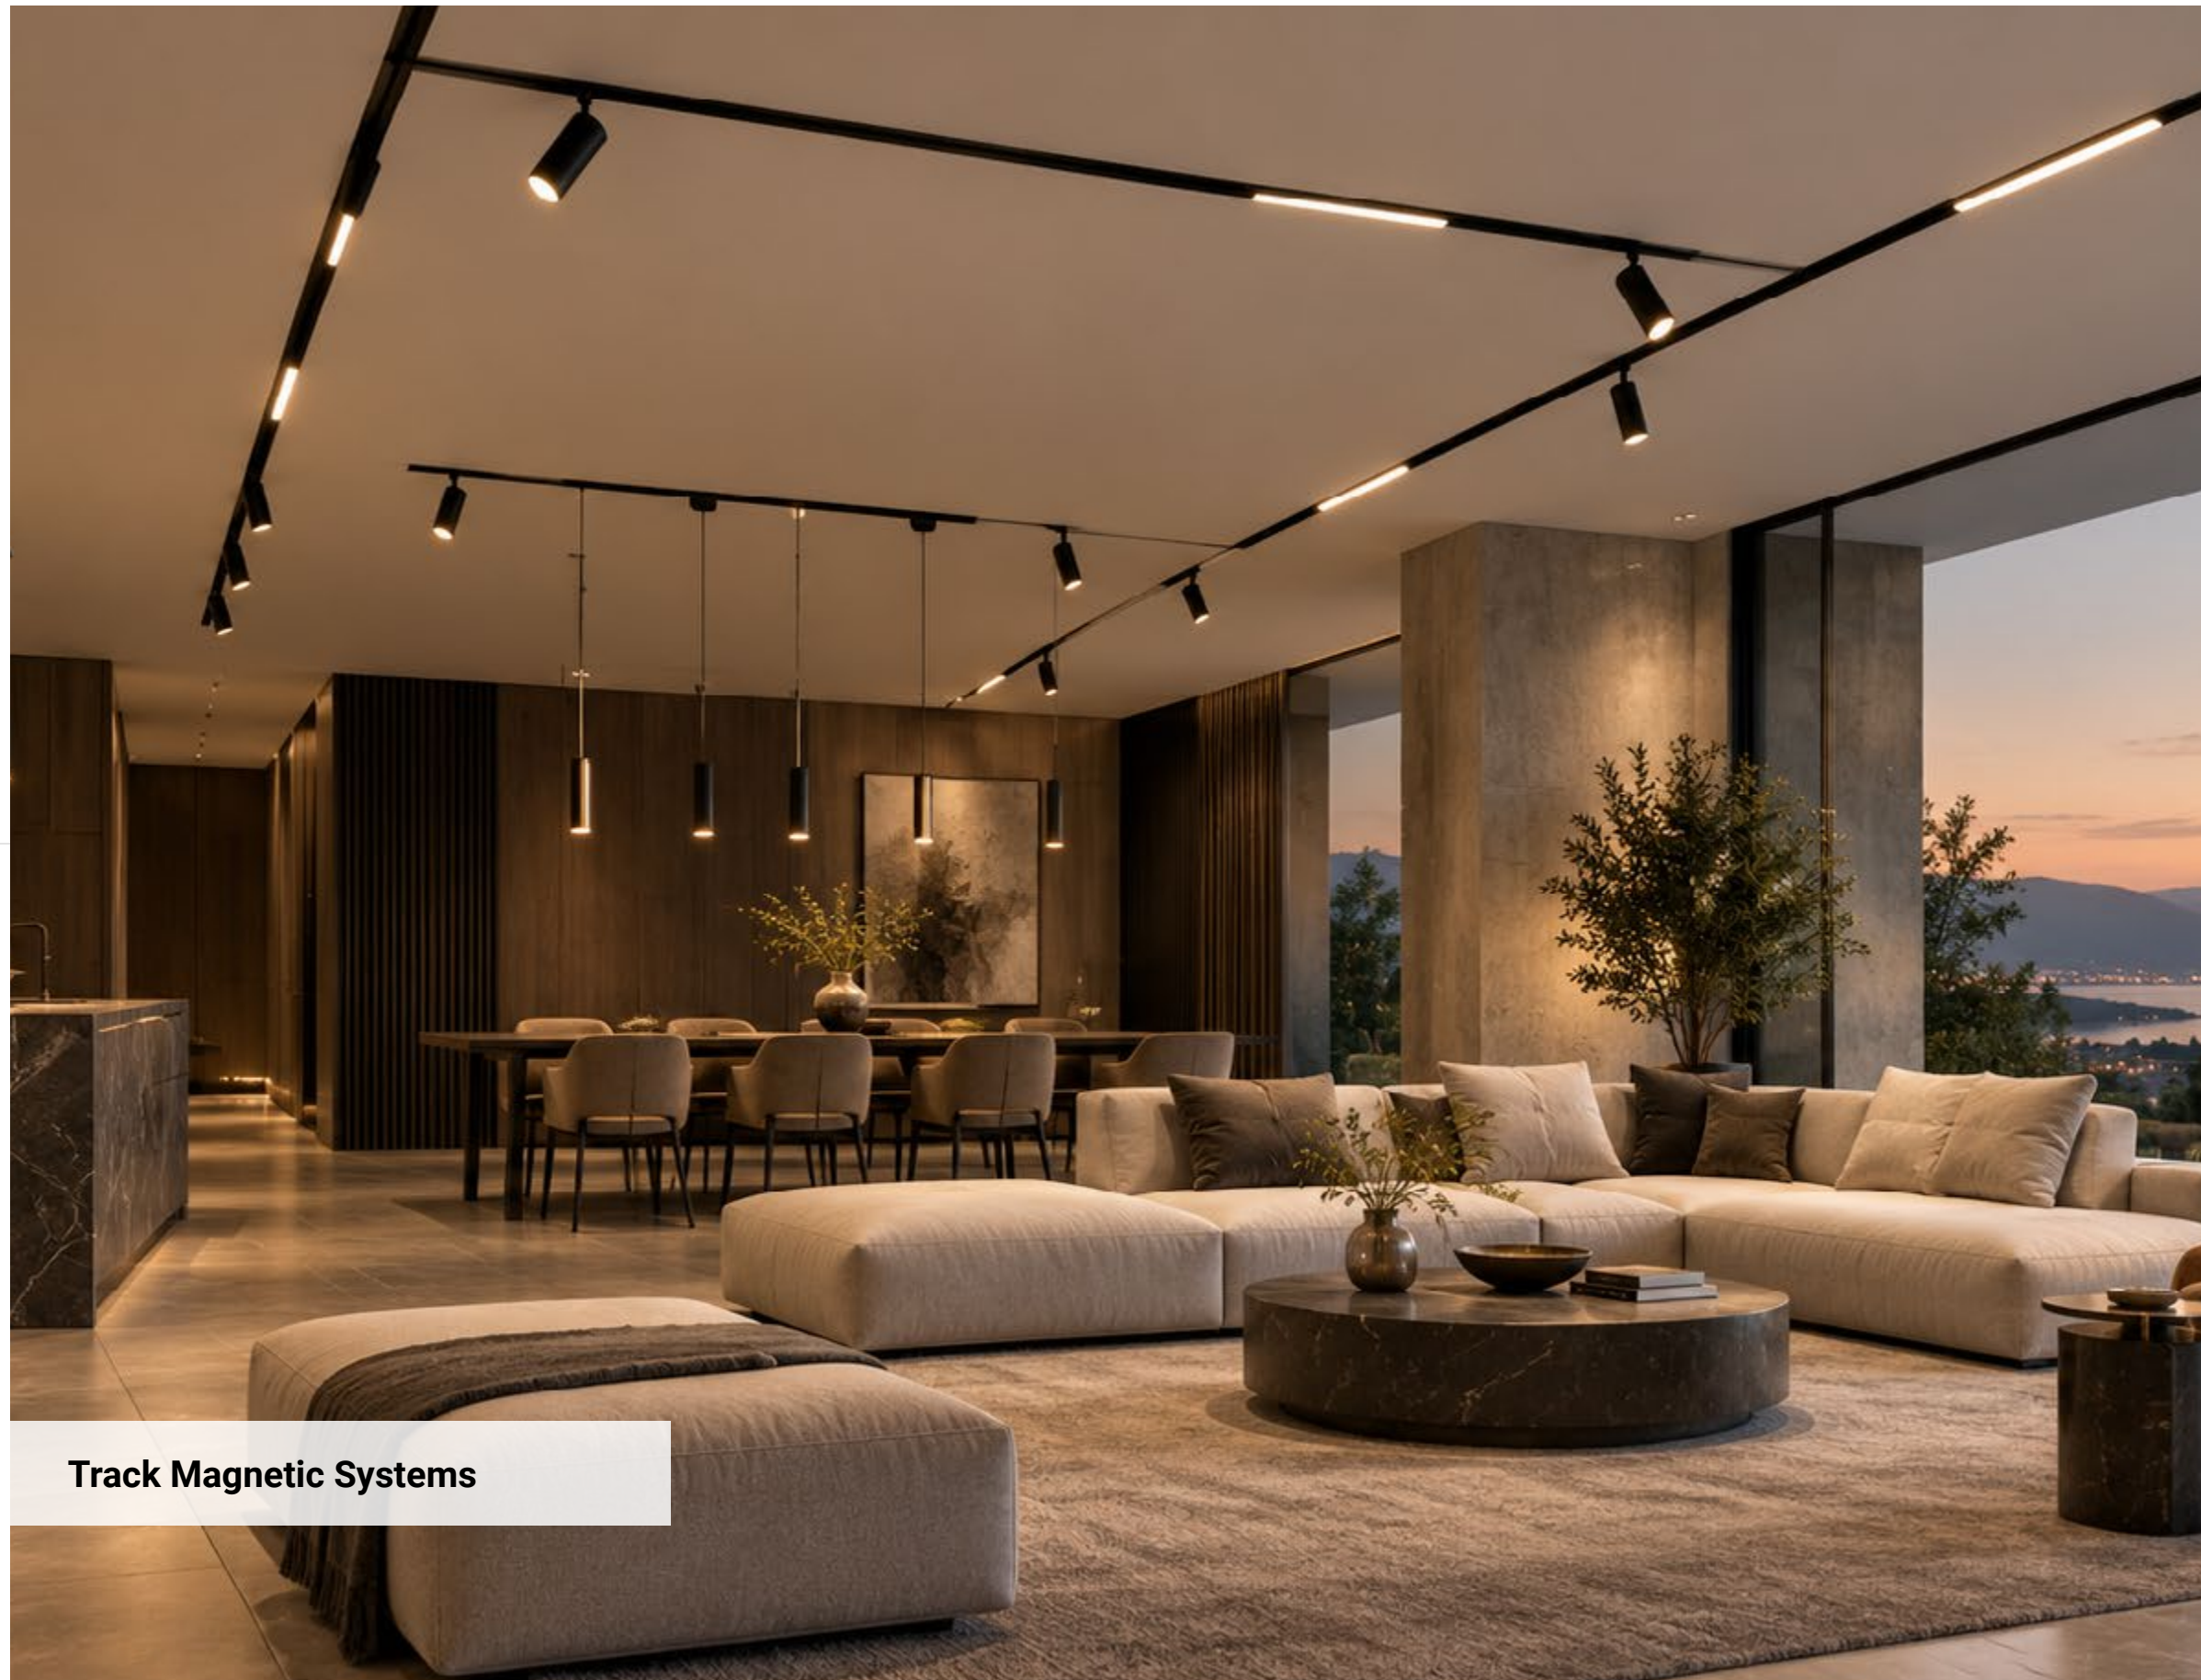

Track Magnetic Systems

Magnetic track systems are modern and highly flexible lighting solutions, designed to combine functionality, clean aesthetics, and easy customization. Thanks to their low-voltage magnetic connection, luminaires can be quickly positioned, moved, or replaced along the track without complex installation.

With a wide range of spotlights, linear lights, pendant modules, and decorative fixtures, magnetic track systems make it easy to create both general and accent lighting in residential and commercial interiors.

Features:

- Flexible modular system with interchangeable luminaires
- Quick and easy magnetic installation
- Adjustable positioning along the track
- Clean, minimalist, and modern design
- Available with different light outputs and colour temperatures
- Suitable for recessed, surface-mounted, and suspended installations
- Durable construction for long-term use

Applications:

- Retail stores, showrooms, and shopping spaces
- Hotels, restaurants, and reception areas
- Offices and modern workspaces
- Living rooms, kitchens, and dining areas
- Galleries, exhibition spaces, and display zones
- Ideal for both functional and decorative lighting projects



LED FLEXIBLE TRACK

- Extremely Flexible
- Free Flowing
- Unlimited Combination
- DIY Sets



SKU	15401
Color	Black

Set includes:
5m flexible track, 2 spotlights, 1 linear light,
1 power supply with box, mounting hardware

LED Flexible Track (Colour Bridge)
DIY SET V1

Input Voltage	DC:48V	Beam Angle	36°
Spot Power	7W	Spot Lumens	390lm
Linear Power	40W	Linear Lumens	2000lm
Beam Angle	36°	Dimmable	No



SKU	15402
Color	White

Set includes:
5m flexible track, 3 spotlights,
1 power supply with box, mounting hardware

LED Flexible Track (Colour Bridge)
DIY SET V2

Input Voltage	DC:48V	Beam Angle	36°
Spot Power	7W	Spot Lumens	390lm
Beam Angle	36°	Dimmable	No



NANO TRACK MAGNETIC SYSTEMS NEW
Length 1m , 2m - Black Body - M05



SKU	15301
-----	-------



SKU	15306
-----	-------



SKU	15307
-----	-------



SKU	15302
-----	-------



SKU	15303
-----	-------



SKU	15304
-----	-------



SKU	15305
-----	-------

NANO TRACK SYSTEM

Low Voltage System
Microfiber design
Different kinds of application
Wide range of accessories





M05-S

NEW Hanging/Surface Magnetic Track System
M05-S

SKU	15314	15315
Length	1m	2m



Horizontal Corner Magnetic

SKU	15316
-----	-------




Vertical Corner Inner Magnetic

SKU	15317
-----	-------



Vertical Corner Outer Magnetic

SKU	15318
-----	-------



T-Corner Magnetic

SKU	15319
-----	-------



X-Corner Magnetic

SKU	15320
-----	-------



End Cap

SKU	15323
-----	-------



Horizon ARC Track Half-Round M05-S

SKU	15324
-----	-------



Vertical ARC Track Quarter M05-S

SKU	15325
-----	-------



Ceiling Base Magnetic M05-S

SKU	15321
-----	-------



Surface Clip for Magnetic Track M05-S

SKU	15322
-----	-------

SKU	Product
15338	1-Layer Pole 10-20CM
15339	1-Layer Pole 25-50CM
15340	1-Layer Pole 50-100CM
15341	1-Layer Pole wired 10-20CM
15342	1-Layer Pole wired 25-50CM
15343	1-Layer Pole wired 50-100CM



SKU	Product
15344	2-Layer Pole 10-20CM
15345	2-Layer Pole 25-50CM
15346	2-Layer Pole 50-100CM
15347	2-Layer Pole wired 10-20CM
15348	2-Layer Pole wired 25-50CM
15349	2-Layer Pole wired 50-100CM



M05-S2

NEW Hanging/Surface Magnetic Track System
DOUBLE M05-S2

SKU	15335	15336	15337
Length	1m	2m	End Cap



M05-S2

NEW Recessed Magnetic Track System
M05-R

SKU	15326	15327
Length	1m	2m



Horizontal Corner

SKU	15328
-----	-------



Vertical Corner Inner

SKU	15329
-----	-------



Vertical Corner Outer

SKU	15330
-----	-------



T-Corner Magnetic

SKU	15331
-----	-------



X-Corner Magnetic

SKU	15332
-----	-------



End Cap

SKU	15334
-----	-------



Horizontal ARC Track Quarter M05-R

SKU	15333
-----	-------



SLIM POWER SUPPLIES NEW
For M05 Tracks - 48V

Input Voltage	AC220-240V 50/60Hz
Material	Aluminium
IP Rating	Ra>80
Dimmable	IP20



	SKU	Watt	Output Voltage	Current	Dimension
Straight	15308	80W	DC: 48V	1.66A	223x18x31.5mm
	15309	150W	DC: 48V	3.13A	303x18x31.5mm
Round	15310	100W	DC: 48V	2.08A	ø90x45mm
	15311	200W	DC: 48V	4.16A	ø120x45mm
External	15312	300W	DC: 48V	6.25A	196x60x29mm
	15313	400W	DC: 48V	8.33A	220x60x29mm

NEW



LED MAGNETIC DOWNLIGHT			
For M05 Tracks			
Power	7W	Beam Angle	24°
Input Voltage	DC48V	CRI	Ra>90
Lumens	560lm	IP Rating	IP20
Size	ø70x90mm	Dimmable	No
SKU	15371	15372	
Color	4000K	3000K	



NEW



LED MAGNETIC DOWNLIGHT			
For M05 Tracks			
Power	7W	Beam Angle	20°
Input Voltage	DC48V	CRI	Ra>90
Lumens	560lm	IP Rating	IP20
Size	ø70x75mm	Dimmable	No
SKU	15380	15381	
Color	4000K	3000K	



NEW



LED MAGNETIC DOWNLIGHT WITH LENS			
For M05 Tracks			
Power	10W	Beam Angle	20°
Input Voltage	DC48V	CRI	Ra>90
Lumens	800lm	IP Rating	IP20
Size	ø70x105mm	Dimmable	No
SKU	15373	15374	
Color	4000K	3000K	



NEW



LED MAGNETIC WALL LIGHT			
For M05 Tracks			
Power	7W	Beam Angle	90°
Input Voltage	DC48V	CRI	Ra>90
Lumens	420lm	IP Rating	IP20
Size	ø180x46mm	Dimmable	No
SKU	15425	15426	
Color	4000K	3000K	



NEW



LED MAGNETIC ZOOMABLE SPOTLIGHT			
For M05 Tracks			
Power	10W	Beam Angle	10-60°
Input Voltage	DC48V	CRI	Ra>90
Lumens	800lm	IP Rating	IP20
Size	ø70x108mm	Dimmable	No
SKU	15375	15376	
Color	4000K	3000K	



NEW



LED MAGNETIC LINEAR FLOODLIGHT			
For M05 Tracks			
Power	10W	Beam Angle	100°
Input Voltage	DC48V	CRI	Ra>90
Lumens	250lm	IP Rating	IP20
Size	302x11x32mm	Dimmable	No
SKU	15382	15383	
Color	4000K	3000K	



NEW



LED MAGNETIC DOWNLIGHT			
For M05 Tracks			
Power	10W	Beam Angle	20°
Input Voltage	DC48V	CRI	Ra>90
Lumens	800lm	IP Rating	IP20
Size	ø80x55mm	Dimmable	No
SKU	15377	15378	
Color	4000K	3000K	



NEW



LED MAGNETIC LINEAR FLOODLIGHT			
For M05 Tracks			
Power	20W	Beam Angle	100°
Input Voltage	DC48V	CRI	Ra>90
Lumens	1200lm	IP Rating	IP20
Size	600x11x12mm	Dimmable	No
SKU	15384	15385	
Color	4000K	3000K	



NEW



LED MAGNETIC SPOT FLOODLIGHT			
For M05 Tracks			
Power	7W	Beam Angle	24°
Input Voltage	DC48V	CRI	Ra>90
Lumens	560lm	IP Rating	IP20
Size	60x31x135mm	Dimmable	No
SKU	15411	15412	
Color	4000K	3000K	
			M05 TRACK

NEW



LED MAGNETIC SPOT FLOODLIGHT			
For M05 Tracks			
Power	7W	Beam Angle	24°
Input Voltage	DC48V	CRI	Ra>90
Lumens	700lm	IP Rating	IP20
Size	80x42x127mm	Dimmable	No
SKU	15419	15420	
Color	4000K	3000K	
			M05 TRACK

NEW



LED MAGNETIC SPOT FLOODLIGHT			
For M05 Tracks			
Power	12W	Beam Angle	24°
Input Voltage	DC48V	CRI	Ra>90
Lumens	960lm	IP Rating	IP20
Size	60x45x120mm	Dimmable	No
SKU	15413	15414	
Color	4000K	3000K	
			M05 TRACK

NEW



LED MAGNETIC SPOT FLOODLIGHT			
For M05 Tracks			
Power	2x7W	Beam Angle	24°
Input Voltage	DC48V	CRI	Ra>90
Lumens	1400lm	IP Rating	IP20
Size	100x42x240mm	Dimmable	No
SKU	15421	15422	
Color	4000K	3000K	
			M05 TRACK

NEW



LED MAGNETIC SPOT FLOODLIGHT			
For M05 Tracks			
Power	15W	Beam Angle	24°
Input Voltage	DC48V	CRI	Ra>90
Lumens	1200lm	IP Rating	IP20
Size	60x45x160mm	Dimmable	No
SKU	15415	15416	
Color	4000K	3000K	
			M05 TRACK

NEW



LED MAGNETIC SPOT FLOODLIGHT			
For M05 Tracks			
Power	12W	Beam Angle	24°
Input Voltage	DC48V	CRI	Ra>90
Lumens	960lm	IP Rating	IP20
Size	60x50x172mm	Dimmable	No
SKU	15423	15424	
Color	4000K	3000K	
			M05 TRACK

NEW



LED MAGNETIC SPOT LIGHT			
For M05 Tracks			
Power	7W	Beam Angle	24°
Input Voltage	DC48V	CRI	Ra>90
Lumens	560lm	IP Rating	IP20
Size	60x45x80mm	Dimmable	No
SKU	15417	15418	
Color	4000K	3000K	
			M05 TRACK

NEW



LED MAGNETIC WALL/CEILING LIGHT			
For M05 Tracks			
Power	20W	Beam Angle	180°
Input Voltage	DC48V	CRI	Ra>90
Lumens	1600lm	IP Rating	IP20
Size	60x200x55mm	Dimmable	No
SKU	15427	15428	
Color	4000K	3000K	
			M05 TRACK



LED MAGNETIC FLOODLIGHT			
For M05 Tracks			
Power	5W	Beam Angle	360°
Input Voltage	DC48V	CRI	Ra>90
Lumens	500lm	IP Rating	IP20
Size	100x130mm	Dimmable	No
SKU	15431	15432	
Color	4000K	3000K	
			M05 TRACK



LED MAGNETIC ANTI-GLARE FLOODLIGHT			
For M05 Tracks			
Power	6W	Beam Angle	60°
Input Voltage	DC48V	CRI	Ra>90
Lumens	150lm	IP Rating	IP20
Size	115x24x44mm	Dimmable	No
SKU	15390	15391	
Color	4000K	3000K	
			M05 TRACK



LED MAGNETIC PENDANT LIGHT			
For M05 Tracks			
Power	5W	Beam Angle	360°
Input Voltage	DC48V	CRI	Ra>90
Lumens	500lm	IP Rating	IP20
Size	100x1160mm	Dimmable	No
SKU	15433	15434	
Color	4000K	3000K	
			M05 TRACK



LED MAGNETIC FLOODLIGHT			
For M05 Tracks - Adjustable			
Power	6W	Beam Angle	100°
Input Voltage	DC48V	CRI	Ra>90
Lumens	360lm	IP Rating	IP20
Size	114x25x73mm	Dimmable	No
SKU	15392	15393	
Color	4000K	3000K	
			M05 TRACK




LED MAGNETIC PENDANT LIGHT			
For M05 Tracks			
Power	7W	Beam Angle	24°
Input Voltage	DC48V	CRI	Ra>90
Lumens	420lm	IP Rating	IP20
Size	60x32x1110mm	Dimmable	No
SKU	15429	15430	
Color	4000K	3000K	
			M05 TRACK



LED MAGNETIC ANTI-GLARE FLOODLIGHT			
For M05 Tracks - Adjustable			
Power	12W	Beam Angle	60°
Input Voltage	DC48V	CRI	Ra>90
Lumens	300lm	IP Rating	IP20
Size	222x25x73mm	Dimmable	No
SKU	15396	15397	
Color	4000K	3000K	
			M05 TRACK



LED MAGNETIC PENDANT LIGHT			
For M05 Tracks			
Power	10W	Beam Angle	24°
Input Voltage	DC48V	CRI	Ra>90
Lumens	800lm	IP Rating	IP20
Size	70x1040mm	Dimmable	No
SKU	15435	15436	
Color	4000K	3000K	
			M05 TRACK

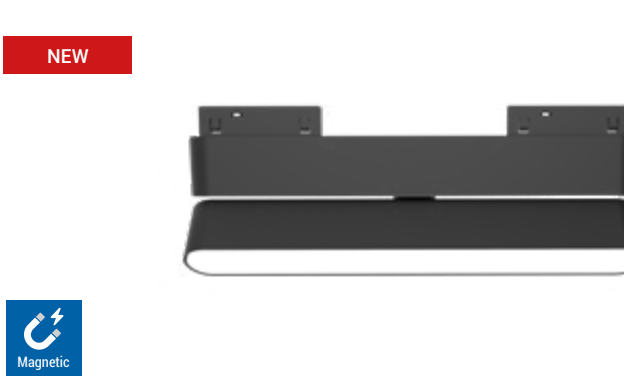

LED MAGNETIC FLOODLIGHT			
For M05 Tracks - Adjustable			
Power	12W	Beam Angle	100°
Input Voltage	DC48V	CRI	Ra>90
Lumens	720lm	IP Rating	IP20
Size	222x25x73mm	Dimmable	No
SKU	15394	15395	
Color	4000K	3000K	
			M05 TRACK

NEW





LED MAGNETIC LINEAR FLOODLIGHT			
For M05 Tracks			
Power	12W	Beam Angle	100°
Input Voltage	DC48V	CRI	Ra>90
Lumens	720lm	IP Rating	IP20
Size	222x25x44mm	Dimmable	No
SKU	15386	15387	
Color	4000K	3000K	
			

NEW





LED MAGNETIC LINEAR LIGHT			
For M05 Tracks			
Power	7W	Beam Angle	100°
Input Voltage	DC48V	CRI	Ra>90
Lumens	420lm	IP Rating	IP20
Size	303x5x15mm	Dimmable	No
SKU	15361	15362	
Color	4000K	3000K	
			

NEW





LED MAGNETIC GRILLE FLOODLIGHT			
For M05 Tracks			
Power	12W	Beam Angle	36°
Input Voltage	DC48V	CRI	Ra>90
Lumens	1200lm	IP Rating	IP20
Size	222x25x44mm	Dimmable	No
SKU	15388	15389	
Color	4000K	3000K	
			

NEW





LED MAGNETIC LINEAR LIGHT			
For M05 Tracks			
Power	14W	Beam Angle	100°
Input Voltage	DC48V	CRI	Ra>90
Lumens	840lm	IP Rating	IP20
Size	600x5x15mm	Dimmable	No
SKU	15363	15364	
Color	4000K	3000K	
			

NEW





LED MAGNETIC NEON STRIP LIGHT			
For M05 Tracks - Adjustable			
Power	6W	Beam Angle	100°
Input Voltage	DC48V	CRI	Ra>90
Lumens	180lm	IP Rating	IP20
Size	561x5x15mm	Dimmable	No
SKU	15367	15368	
Color	4000K	3000K	
			

NEW





LED MAGNETIC GRILLE LINEAR LIGHT			
For M05 Tracks			
Power	7W	Beam Angle	60°
Input Voltage	DC48V	CRI	Ra>90
Lumens	560lm	IP Rating	IP20
Size	300x5x15mm	Dimmable	No
SKU	15365	15366	
Color	4000K	3000K	
			

NEW






LED MAGNETIC NEON STRIP LIGHT			
For M05 Tracks			
Power	12W	Beam Angle	100°
Input Voltage	DC48V	CRI	Ra>90
Lumens	360lm	IP Rating	IP20
Size	1061x5x15mm	Dimmable	No
SKU	15369	15370	
Color	4000K	3000K	
			

NEW





MAGNETIC SPEAKERS			
For M05 Tracks - Battery or direct power			
Power	2x10W RMS	Input Voltage	DC48V
Distance	10m	TWS	Yes
Bluetooth	5.3	IP Rating	IP20
Size	160x70x72mm	Playtime	8h
SKU	15379		
Color	Black		
			


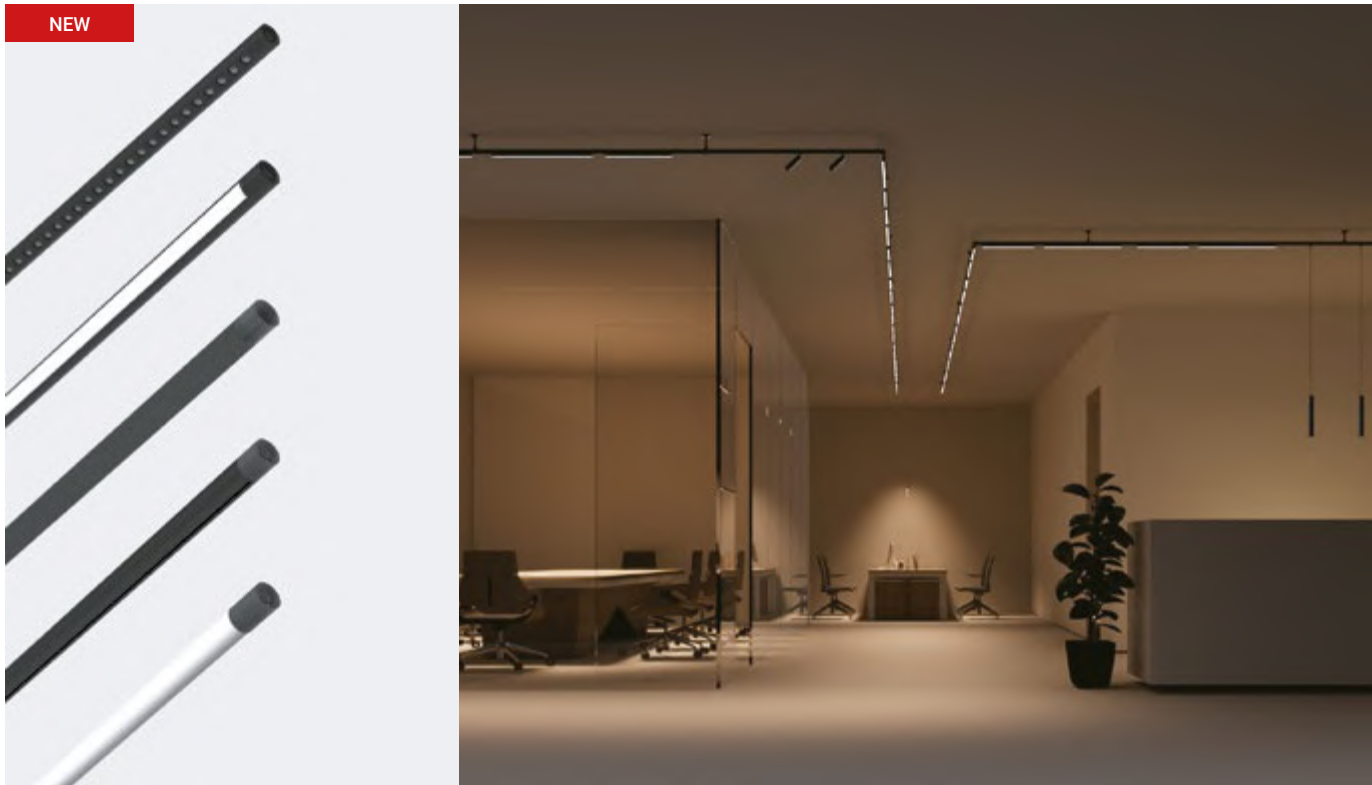


TUBE NANO5 TRACK MAGNETIC SYSTEMS
Black Body - M05 Compatible



The Tube NANO5 Track System offers versatile illumination through a single, streamlined setup. Compatible with M05 Track System linear fixtures, it enables customized lighting effects and flexible configurations.

Ideal for office spaces, the Tube NANO5 Track integrates seamlessly with slim NANO5 (5 mm) system luminaires, delivering optimized, adaptable, and visually refined lighting solutions.

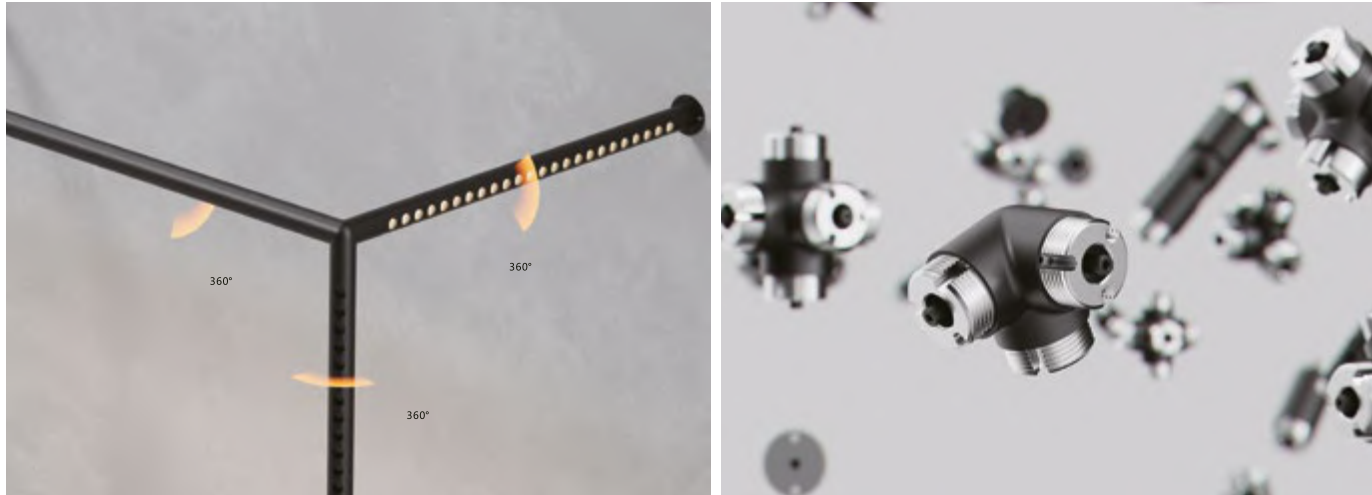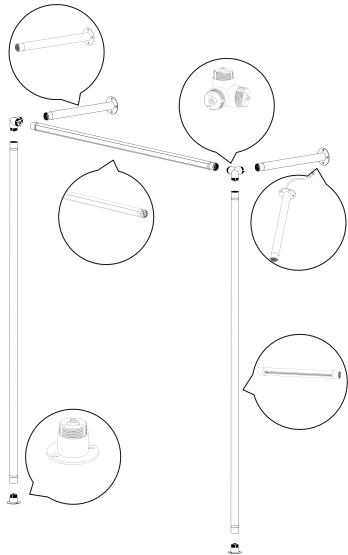

NEW

LED TUBE FLOODLIGHT

M05 Tube Series 48V

Input Voltage	DC48V
Beam Angle	100°
CRI	Ra>90
IP Rating	IP20

SKU	Watt	Lumen	Lumen/W	Color	Dimension
15473	6W	480lm	80lm/W	4000K	280.5x26.5mm
15474	6W	480lm	80lm/W	3000K	280.5x26.5mm
15475	12W	960lm	80lm/W	4000K	500x26.5mm
15476	12W	960lm	80lm/W	3000K	500x26.5mm
15477	18W	1440lm	80lm/W	4000K	736.5x26.5mm
15478	18W	1440lm	80lm/W	3000K	736.5x26.5mm

NEW

LED TUBE GRILLE LIGHT

M05 Tube Series 48V

Input Voltage	DC48V
Beam Angle	24°
CRI	Ra>90
IP Rating	IP20

SKU	Watt	Lumen	Lumen/W	Color	Dimension
15479	12W	960lm	80lm/W	4000K	507.5x26.5mm
15480	12W	960lm	80lm/W	3000K	507.5x26.5mm
15481	18W	1440lm	80lm/W	4000K	734.5x26.5mm
15482	18W	1440lm	80lm/W	3000K	734.5x26.5mm
15483	24W	1920lm	80lm/W	4000K	961.6x26.6mm
15484	24W	1920lm	80lm/W	3000K	961.6x26.6mm

NEW

LED TUBE LIGHT

M05 Tube Series 48V

Input Voltage	DC48V
Beam Angle	360°
CRI	Ra>90
IP Rating	IP20

SKU	Watt	Lumen	Lumen/W	Color	Dimension
15485	8W	640lm	80lm/W	4000K	500x26.5mm
15486	8W	640lm	80lm/W	3000K	500x26.5mm
15487	12W	960lm	80lm/W	4000K	736.6x26.5mm
15488	12W	960lm	80lm/W	3000K	736.6x26.5mm
15489	16W	1280lm	80lm/W	4000K	964.5x26.5mm
15490	16W	1280lm	80lm/W	3000K	964.5x26.5mm

NEW



MAGNETIC TUBE TRACK WITH SLOT
M05 Tube Series 48V

Input Voltage	DC48V
Material	Aluminium
IP Rating	IP20

SKU	15443	15444	15445	15446	15447
Color	300mm	500mm	800mm	2000mm	3000mm



NEW



MAGNETIC TUBE TRACK without
M05 Tube Series 48V



Material	Aluminium
IP Rating	IP20

SKU	15448	15449	15450	15451	15452
Color	300mm	500mm	800mm	1000mm	2000mm



NEW

The innovative multi-dimensional connector system enables limitless configurations through advanced electromechanical integration. Its modular architecture supports precision-engineered geometric structures, luminous art installations, and dynamic spatial adaptation. With an intelligent topology, the system expands the possibilities of structural design, enabling complex forms and responsive spatial environments.

 SKU 15442 SR-Plug	 SKU 15463 Adjustable Connector	 SKU 15437 Hanging Input	 SKU 15398 Adjustable Hanging Holder Pole 10~20cm	 SKU 15399 Adjustable Hanging Holder Pole 25~50cm	 SKU 15400 Adjustable Hanging Holder Pole 50~100cm
 SKU 15467 A-BASE Electrically Conductive	 SKU 15468 A-BASE Without Wire	 SKU 15469 B-BASE Electrically	 SKU 15470 B-BASE Without Wire	 SKU 15471 Holder Shell	 SKU 15472 Power Supply 48V
 SKU 15438 Hanging Input	 SKU 15464 Adjustable Base	 SKU 15466 C-Connector	 SKU 15439 Hanging Input with Cable Box	 SKU 15440 L-Hanging Plug	 SKU 15441 L-Hanging Plug Input with Power Wire

 SKU 15454 I Joint Connector	 SKU 15456 X Joint Connector
 SKU 15457 L Joint Connector	 SKU 15460 4 Way Joint Connector
 SKU 15455 T Joint Connector	 SKU 15461 5 Way Joint Connector
 SKU 15459 3 Way Joint Connector	 SKU 15462 5-6 Way Joint Connector



MAGNETIC TRACK SYSTEM R35
Length 1m , 1.5m , 2m - Black , White Body

Input Voltage DC48V IP Rating IP20

S35 - Black					
SKU	5350	5351	5352	5353	
Length	1m	1.5m	2m	End Cap	

S35 - White					
SKU	5241	5242	5243	5244	
Length	1m	1.5m	2m	End Cap	

R35 Build-in - Black					
SKU	5360	5361	5362	5411	
Length	1m	1.5m	2m	End Cap	

R35 Build-in - White					
SKU	5250	5251	5252	5260	
Length	1m	1.5m	2m	End Cap	

R35B Build-in - Black					
SKU	5420	5421	5422	5411	
Length	1m	1.5m	2m	End Cap	

R35B Build-in - White					
SKU	5255	5256	5257	5260	
Length	1m	1.5m	2m	End Cap	




SURFACE CORNER S35		
SKU	5358	5249
Color	Black	White



SURFACE CORNER R35		
SKU	5363	5253
Length	Black	White



CONCAVE ANGLE R35		
SKU	5408	5259
Length	Black	White



SURFACE CORNER R35B		
SKU	5423	5258
Length	Black	White



MAGNETIC TRACK SYSTEM R20
Length 1m , 1.5m , 2m - Black Body

Input Voltage DC48V IP Rating IP20

S20					
SKU	5364	5365	5366	5413	
Length	1m	1.5m	2m	End Cap	

R20 Build-in					
SKU	5367	5368	5369	5415	
Length	1m	1.5m	2m	End Cap	

R20B Build-in					
SKU	5450	5451	5452	5415	
Length	1m	1.5m	2m	End Cap	



SURFACE CORNER S20	
SKU	5412
Color	Black



SURFACE CORNER R20	
SKU	5414
Length	Black



CONCAVE ANGLE R20	
SKU	5409
Length	Black



SURFACE CORNER R20B	
SKU	5453
Length	Black





LED MAGNETIC FLOODLIGHT
For M35 Tracks - White

Input Voltage	DC48V
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20

SKU	Watt	Lumen	Dimmable	Color	Dimension
5265	12W	960lm	No	4000K	305x35x67mm
5261	12W	960lm	No	3000K	305x35x67mm
5266	20W	1600lm	No	4000K	605x35x67mm
5262	20W	1600lm	No	3000K	605x35x67mm
5284	12W	960lm	Dimmable 0-10V	4000K	307x35x69mm
5283	12W	960lm	Dimmable 0-10V	3000K	307x35x69mm
5286	20W	1600lm	Dimmable 0-10V	4000K	606x35x69mm
5285	20W	1600lm	Dimmable 0-10V	3000K	606x35x69mm



LED MAGNETIC FLOODLIGHT
For M35 Tracks - Black


Input Voltage	DC48V
Beam Angle	120°
CRI	Ra>80
IP Rating	IP20

SKU	Watt	Lumen	Dimmable	Color	Dimension
5391	12W	960lm	No	4000K	305x35x67mm
5340	12W	960lm	No	3000K	305x35x67mm
5392	20W	1600lm	No	4000K	605x35x67mm
5341	20W	1600lm	No	3000K	605x35x67mm
5275	12W	960lm	Dimmable 0-10V	4000K	307x35x69mm
5274	12W	960lm	Dimmable 0-10V	3000K	307x35x69mm
5278	20W	1600lm	Dimmable 0-10V	4000K	606x35x69mm
5276	20W	1600lm	Dimmable 0-10V	3000K	606x35x69mm



LED MAGNETIC TRACK HEADS
For M35 Tracks

Input Voltage	DC48V
Beam Angle	120°
CRI	Ra>90
IP Rating	IP20

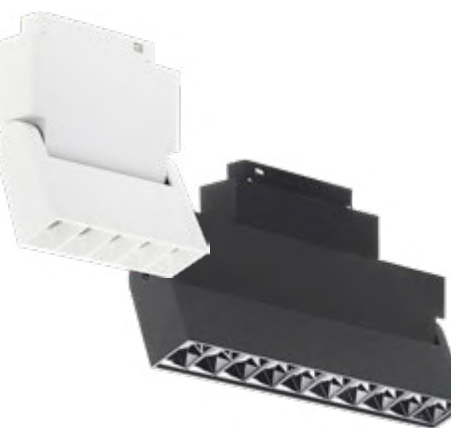

LED MAGNETIC TRACK HEADS
For M35 Tracks - Adjustable

Input Voltage	DC48V
Beam Angle	24°
CRI	Ra>90
IP Rating	IP20

	SKU	Watt	Lumen	Dimmable	Color	Dimension
White	5268	10W	800lm	No	4000K	137x34x68mm
	5267	10W	800lm	No	3000K	137x34x68mm
	5270	20W	1600lm	No	4000K	270x34x67mm
	5269	20W	1600lm	No	3000K	270x34x67mm
	5288	20W	800lm	Dimmable 0-10V	4000K	270x34x67mm
	5287	20W	800lm	Dimmable 0-10V	3000K	270x34x67mm
Black	5393	10W	1600lm	No	4000K	137x34x68mm
	5342	10W	1600lm	No	3000K	137x34x68mm
	5394	20W	800lm	No	4000K	270x34x67mm
	5343	20W	800lm	No	3000K	270x34x67mm
	5280	20W	1600lm	Dimmable 0-10V	4000K	270x34x67mm
	5279	20W	1600lm	Dimmable 0-10V	3000K	270x34x67mm

	SKU	Watt	Lumen	Dimmable	Color	Dimension
White	5273	10W	800lm	No	3000K	137x34x68mm
Black	5398	10W	800lm	No	4000K	137x34x68mm
	5347	10W	800lm	No	3000K	270x34x67mm
	5399	20W	1600lm	No	4000K	270x34x67mm
	5348	20W	1600lm	No	3000K	270x34x67mm





LED MAGNETIC TRACK LIGHT	
For M35 Tracks - White	
Input Voltage	DC48V
Beam Angle	15°
CRI	Ra>80
IP Rating	IP20

SKU	Watt	Lumen	Dimmable	Color	Dimension
5271	12W	960lm	No	4000K	ø60x140x220mm
5263	12W	960lm	No	3000K	ø60x140x220mm
5290	12W	960lm	Dimmable 0-10V	4000K	ø65x140x220mm
5289	12W	960lm	Dimmable 0-10V	3000K	ø65x140x220mm
5272	20W	1600lm	No	4000K	ø70x140x220mm
5264	20W	1600lm	No	3000K	ø70x140x220mm



LED MAGNETIC TRACK LIGHT	
For M35 Tracks - Black	
Input Voltage	DC48V
Beam Angle	15°
CRI	Ra>80
IP Rating	IP20

SKU	Watt	Lumen	Dimmable	Color	Dimension
5395	7W	560lm	No	4000K	ø50x140x220mm
5344	7W	560lm	No	3000K	ø50x140x220mm
5396	12W	960lm	No	4000K	ø60x145x175mm
5345	12W	960lm	No	3000K	ø60x145x175mm
5282	12W	960lm	Dimmable 0-10V	4000K	ø65x150x215mm
5281	12W	960lm	Dimmable 0-10V	3000K	ø65x150x215mm
5397	20W	1600lm	No	4000K	ø70x140x190mm
5346	20W	1600lm	No	3000K	ø70x140x190mm



LED MAGNETIC TRACK LIGHT			
For M20/M35 Tracks			
Power	5W	Beam Angle	15-60°
Input Voltage	DC48V	CRI	Ra>90
Lumens	560lm	IP Rating	IP20
Size	ø50x200mm	Dimmable	No
SKU	5319	5320	
Color	4000K	3000K	



LED MAGNETIC SPOTLIGHT			
For M20/M35 Tracks - Adjustable Beam Angle			
Power	7W	Beam Angle	15°-60°
Input Voltage	DC48V	CRI	Ra>90
Lumens	560lm	IP Rating	IP20
Size	ø60x985mm	Dimmable	No
SKU	5400	5349	
Color	4000K	3000K	



LED MAGNETIC TRACK LIGHT			
For M20/M35 Tracks			
Power	6W	Beam Angle	90°
Input Voltage	DC48V	CRI	Ra>90
Lumens	480lm	IP Rating	IP20
Size	ø130x920mm	Dimmable	No
SKU	5335	5334	
Color	4000K	3000K	



LED MAGNETIC TRACK LIGHT			
For M20/M35 Tracks			
Power	10W	Beam Angle	90°
Input Voltage	DC48V	CRI	Ra>90
Lumens	800lm	IP Rating	IP20
Size	ø85x920mm	Dimmable	No
SKU	5337	5336	
Color	4000K	3000K	





LED MAGNETIC TRACK LIGHT			
For M20 Tracks			
Power	10W	Beam Angle	15°
Input Voltage	DC48V	CRI	Ra>90
Lumens	800lm	IP Rating	IP20
Size	ø72x105x141mm	Dimmable	No
SKU	5378	5379	
Color	4000K	3000K	
			M20 TRACKS



LED MAGNETIC FLOODLIGHT					
For M20 Tracks					
Power	12W		Beam Angle	15°	
Input Voltage	DC48V		CRI	Ra>90	
Lumens	960lm		IP Rating	IP20	
Size	ø60x105x170mm		Dimmable	No	
SKU	5315	5316			
Color	4000K	3000K			





LED MAGNETIC FLOODLIGHT			
For M20/M35 Tracks			
Power	5W	Beam Angle	50°
Input Voltage	DC48V	CRI	Ra>90
Lumens	400lm	IP Rating	IP20
Size	88x75mm	Dimmable	No
SKU	5339	5338	
Color	4000K	3000K	
			M35
			M20



LED MAGNETIC FLOODLIGHT					
For M20 Tracks					
Material	Aluminium	CRI	Ra>80		
Input Voltage	DC48V	IP Rating	IP20		
Beam Angle	120°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
5416	10W	800lm	80lm/W	4000K	305x22x45mm
5417	10W	800lm	80lm/W	3000K	305x22x45mm
5418	18W	1440lm	80lm/W	4000K	605x22x45mm
5419	18W	1440lm	80lm/W	3000K	605x22x45mm




LED MAGNETIC TRACK LIGHT HEADS					
For M20 Tracks					
Material	Aluminium	CRI	Ra>90		
Input Voltage	DC48V	IP Rating	IP20		
Beam Angle	24°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
5311	6W	480lm	80lm/W	4000K	112x22x45mm
5312	6W	480lm	80lm/W	3000K	112x22x45mm
5313	12W	960lm	80lm/W	4000K	222x22x45mm
5314	12W	960lm	80lm/W	3000K	222x22x45mm



LED MAGNETIC TRACK LIGHT HEADS					
For M20 Tracks - Adjustable					
Material	Aluminium	CRI	Ra>90		
Input Voltage	DC48V	IP Rating	IP20		
Beam Angle	24°	Dimmable	No		
SKU	Watt	Lumen	Lumen/W	Color	Dimension
5317	9W	720lm	80lm/W	4000K	114x23x128mm
5318	9W	720lm	80lm/W	3000K	114x23x128mm



SKU 5220
Angle for S15

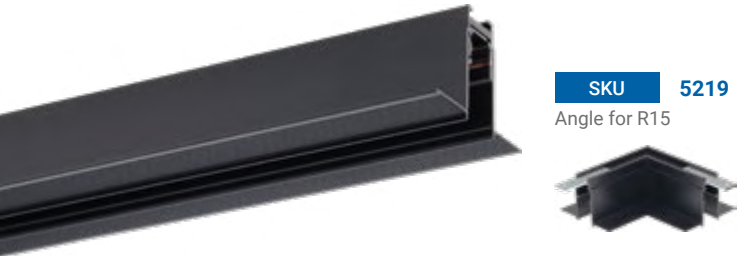

SKU 5219
Angle for R15




SKU 5218
Angle for R15B

MAGNETIC TRACK SYSTEM R15
Length 1m , 1.5m , 2m -Black Body

Input Voltage DC48V IP Rating IP20


S15

SKU	5207	5208	5209
Length	1m	1.5m	2m




R15 Build-in

SKU	5204	5205	5206
Length	1m	1.5m	2m



R15B Build-in

SKU	5201	5202	5203
Length	1m	1.5m	2m



LED MAGNETIC FLOODLIGHT

For M15 Tracks

Material	Aluminium	CRI	Ra>90
Input Voltage	DC48V	IP Rating	IP20
Beam Angle	120°	Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
5225	10W	650lm	65lm/W	4000K	305x15x32mm
5226	10W	650lm	65lm/W	3000K	305x15x32mm
5227	20W	1300lm	65lm/W	4000K	606x15x32mm
5228	20W	1300lm	65lm/W	3000K	606x15x32mm

LED MAGNETIC TRACK LIGHT HEADS

For M15 Tracks

Material	Aluminium	CRI	Ra>90
Input Voltage	DC48V	IP Rating	IP20
Beam Angle	24°	Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
5229	12W	780lm	80lm/W	4000K	235x15x32mm
5230	12W	780lm	80lm/W	3000K	235x15x32mm



LED MAGNETIC FLOODLIGHT

For M15 Tracks

Material	Aluminium	CRI	Ra>90
Input Voltage	DC48V	IP Rating	IP20
Beam Angle	24°	Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
5221	6W	480lm	80lm/W	4000K	ø35x129x116mm
5222	6W	480lm	80lm/W	3000K	ø35x129x116mm
5223	10W	800lm	80lm/W	4000K	ø44x129x135mm
5224	10W	800lm	80lm/W	3000K	ø44x129x135mm



SLIM POWER SUPPLIES

For M15 Tracks - 48V

Input Voltage	220V 50/60Hz
Material	Aluminium
IP Rating	IP20
Dimmable	No



SKU	Watt	Output Voltage	Current	Dimension
5214	80W	DC: 48V	1.66A	262x15.7x34mm
5215	150W	DC: 48V	3.12A	262x15.7x34mm



MINI MAGNETIC TRACK SYSTEM

Length 1m , 1.5m , 2m - Black Body

Input Voltage DC48V IP Rating IP20

SKU	5480	5481	5482
Length	1m	1.5m	2m



SKU 5483
Straight Connector



SKU 5484
L-Connector



SKU 5485
T-Connector



SKU 5486
Cross Connector



SKU 5487
90 Degree Connector



MINI POWER SUPPLIES	
Aluminium - 48V	
Input Voltage	220V 50/60Hz
Material	Aluminium
IP Rating	IP20
Dimmable	No



SKU	Watt	Output Voltage	Current	Dimension
5488	100W	DC: 48V	2.08A	33x30x370mm
5489	200W	DC: 48V	4.16A	33x30x470mm



LED MINI TRACK LIGHT			
For Mini MM30 Tracks			
Power	12W ; 10W	Beam Angle	120° ; 25°
Input Voltage	DC48V	CRI	Ra>90
Lumens	400lm ; 520lm	IP Rating	IP20
Size 12W	300x32x11mm	Dimmable	No
Size 10W	240x32x11mm		
SKU	5490	5491	5492
Color	4000K	3000K	4000K



LED MINI TRACK LIGHT			
For Mini MM30 Tracks			
Power	4W	Beam Angle	80°
Input Voltage	DC48V	CRI	Ra>90
Lumens	240lm	IP Rating	IP20
Size	48x35x60mm	Dimmable	No
SKU	5498	5499	
Color	4000K	3000K	



LED MINI TRACK LIGHT			
For Mini MM30 Tracks			
Power	5W	Beam Angle	38°
Input Voltage	DC48V	CRI	Ra>90
Lumens	425lm	IP Rating	IP20
Size	48x35x60mm	Dimmable	No
SKU	5496	5497	
Color	4000K	3000K	



LED MINI TRACK LIGHT			
For Mini MM30 Tracks			
Power	6W	Beam Angle	32°
Input Voltage	DC48V	CRI	Ra>90
Lumens	720lm	IP Rating	IP20
Size	ø54x63x98mm	Dimmable	No
SKU	5494	5495	
Color	4000K	3000K	





M35
TRACKS

SLIM POWER SUPPLIES				
For M35 Tracks - White - 48V				
Input Voltage	220V 50/60Hz	IP Rating	IP20	
Material	Aluminium	Dimmable	No	
SKU	Watt	Output Voltage	Current	Dimension
5216	100W	DC: 48V	2.1A	238x32.6x42.7mm
5217	200W	DC: 48V	4.16A	307x32.4x45mm



M35
TRACKS

SLIM POWER SUPPLIES				
For M35 Tracks - Black - 48V				
Input Voltage	220V 50/60Hz	IP Rating	IP20	
Material	Aluminium	Dimmable	No	
SKU	Watt	Output Voltage	Current	Dimension
5426	100W	DC: 48V	2.1A	238x32x42mm
5427	200W	DC: 48V	4.2A	307x32.0x43mm
5428	280W	DC: 48V	5.85A	307x32.0x43mm



M20
TRACKS

SLIM POWER SUPPLIES				
For M20 Tracks - Black - 48V				
Input Voltage	220V 50/60Hz	IP Rating	IP20	
Material	Aluminium	Dimmable	No	
SKU	Watt	Output Voltage	Current	Dimension
5424	100W	DC: 48V	2.08A	33x30x370mm
5425	200W	DC: 48V	4.16A	33x30x470mm



M35
TRACKS

POWER SUPPLIES				
For M35 Tracks - Metal - 48V				
Input Voltage	220V 50/60Hz	IP Rating	IP20	
Material	Aluminium	Dimmable	No	
SKU	Watt	Output Voltage	Current	Dimension
6284	120W	DC: 48V	2.5A	160x98x30mm
6285	250W	DC: 48V	5.2A	215x115x30mm

SKU 5247
Straight Joint M20/M35



SKU 5248
Flexible Joint M20/M35



SKU 5246
Input Cable M20/M35



SKU 5245
Hanging Accessories M20/M35



SKU 5356
Straight Joint M20/M35



SKU 5357
Flexible Joint M20/M35



SKU 5355
Input Cable M20/M35



SKU 5354
Hanging Accessories M20/M35



SKU 5212
Straight Joint M15



SKU 5213
Flexible Joint M15



SKU 5211
Input Cable M15



SKU 5210
Hanging Accessories M15



SKU 5254
Cover Plate M35 - 3m - White



SKU 5370
Cover Plate M35 - 3m - Black



SKU 5359
Cover Plate M20 - 3m





LED Floodlights

LED floodlights are the go-to solution for powerful outdoor illumination, ideal for lighting up large areas with efficiency and reliability. From private villas and gardens to warehouses and industrial yards, they deliver consistent brightness while reducing energy consumption. Built to withstand tough conditions, they are a durable choice for any outdoor project.

Features:

- Up to 80% energy savings compared to traditional floodlights
- High lumen output with wide beam angles for broad coverage
- IP65-rated for reliable outdoor performance
- Wall, ground, or pylon mounting options
- Sturdy construction for long-lasting durability
- Optional models with integrated solar panels

Applications:

- Outdoor lighting for gardens, courtyards, and driveways
- Large area coverage for warehouses, yards, and parking lots
- Residential, commercial, and industrial projects

NEW



LED SMD FLOODLIGHT	
PREMIUM LINE	
High Power - Grey Body	
Input Voltage	220-240V 50/60Hz
Beam Angle	90°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
15901	30W	3000lm	100lm/W	6000K	170x135x28mm
15902	30W	3000lm	100lm/W	4000K	170x135x28mm
15903	50W	5000lm	100lm/W	6000K	200x160x28mm
15904	50W	5000lm	100lm/W	4000K	200x160x28mm
15905	100W	10000lm	100lm/W	6000K	252x207x30mm
15906	100W	10000lm	100lm/W	4000K	252x207x30mm
15907	150W	15000lm	100lm/W	6000K	290x230x34mm
15908	150W	15000lm	100lm/W	4000K	290x230x34mm



NOT INCLUDED

SKU	*Optional Sensors
5985	PIR Sensor
5986	PIR With Adjustment
5987	Day / Night Sensor

LED SMD FLOODLIGHT	
CCT Light - Optional Sensors	
Input Voltage	220-240V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP65
Dimmable	No



SKU	Watt	Lumen	Lumen/W	Color	Dimension
5981	20W	1800m	90lm/W	CCT	121.7x121.8x26mm
5982	30W	2700lm	90lm/W	CCT	154.7x150x26mm
5983	50W	4500lm	90lm/W	CCT	190x153x32mm
5984	100W	9000lm	90lm/W	CCT	220x240x38mm

NEW



LED SMD FLOODLIGHT	
PREMIUM LINE	
High Power - Grey Body	
Input Voltage	180-265V 50/60Hz
Beam Angle	90°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
15909	200W	20000lm	100lm/W	6000K	321.7x34.5x290mm
15910	200W	3000lm	100lm/W	4000K	321.7x34.5x290mm
15911	300W	3000lm	100lm/W	6000K	429x40x319mm
15912	300W	3000lm	100lm/W	4000K	429x40x319mm
15913	500W	50000lm	100lm/W	6000K	564x51x421mm
15914	500W	50000lm	100lm/W	4000K	564x51x421mm



LED SMD FLOODLIGHT	
CCT Light PF>0.9	
Input Voltage	200-277V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP66
Dimmable	No



SKU	Watt	Lumen	Lumen/W	Color	Dimension
5303	50W	5000m	100lm/W	CCT	228x230x52 mm
5304	100W	10000lm	100lm/W	CCT	278x300x52 mm
5305	150W	15000lm	100lm/W	CCT	400x210x55mm
5306	200W	20000lm	100lm/W	CCT	394x376x56 mm



LED SMD FLOODLIGHT	
PREMIUM LINE	
White Body	
Input Voltage	180-265V 50/60Hz
Beam Angle	90°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension	
15859	10W	1000lm	100lm/W	6000K	122x89x19.5mm	
15860	10W	1000lm	100lm/W	4000K	122x89x19.5mm	
15861	10W	1000lm	100lm/W	3000K	122x89x19.5mm	
15862	20W	2000lm	100lm/W	6000K	139.6x97.6x23.7mm	
15863	20W	2000lm	100lm/W	4000K	139.6x97.6x23.7mm	
15864	20W	2000lm	100lm/W	3000K	139.6x97.6x23.7mm	
15865	30W	3000lm	100lm/W	6000K	169x140x29 mm	
15866	30W	3000lm	100lm/W	4000K	169x140x29 mm	
15867	30W	3000lm	100lm/W	3000K	169x140x29 mm	
70cm	15868	50W	5000lm	100lm/W	202x167x31mm	
	15869	50W	5000lm	100lm/W	4000K	202x167x31mm
	15870	50W	5000lm	100lm/W	3000K	202x167x31mm
100cm	15871	100W	10000lm	100lm/W	260x225x34mm	
	15872	100W	10000lm	100lm/W	4000K	260x225x34mm
	15873	100W	10000lm	100lm/W	3000K	260x225x34mm



LED SMD FLOODLIGHT	
PREMIUM LINE	
High Power - Black Body	
Input Voltage	180-265V 50/60Hz
Beam Angle	90°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
15889	150W	15000lm	100lm/W	6000K	300x256x38mm
15890	150W	15000lm	100lm/W	4000K	300x256x38mm
15891	200W	28000lm	140lm/W	6000K	345x291x38mm
15892	200W	28000lm	140lm/W	4000K	345x291x38mm
15893	300W	42000lm	140lm/W	6000K	400x331x49mm
15894	300W	42000lm	140lm/W	4000K	400x331x49mm
15895	400W	56000lm	140lm/W	6000K	535x455x60mm
15896	400W	56000lm	140lm/W	4000K	535x455x60mm
15897	500W	70000lm	140lm/W	6000K	535x455x60mm
15898	500W	70000lm	140lm/W	4000K	535x455x60mm



LED SMD FLOODLIGHT	
PREMIUM LINE	
Black Body	
Input Voltage	180-265V 50/60Hz
Beam Angle	90°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension	
15874	10W	1000lm	100lm/W	6000K	122x89x19.5mm	
15875	10W	1000lm	100lm/W	4000K	122x89x19.5mm	
15876	10W	1000lm	100lm/W	3000K	122x89x19.5mm	
15877	20W	2000lm	100lm/W	6000K	139.6x97.6x23.7mm	
15878	20W	2000lm	100lm/W	4000K	139.6x97.6x23.7mm	
15879	20W	2000lm	100lm/W	3000K	139.6x97.6x23.7mm	
15880	30W	3000lm	100lm/W	6000K	169x140x29 mm	
15881	30W	3000lm	100lm/W	4000K	169x140x29 mm	
15882	30W	3000lm	100lm/W	3000K	169x140x29 mm	
70cm	15883	50W	5000lm	100lm/W	202x167x31mm	
	15884	50W	5000lm	100lm/W	4000K	202x167x31mm
	15885	50W	5000lm	100lm/W	3000K	202x167x31mm
100cm	15886	100W	10000lm	100lm/W	260x225x34mm	
	15887	100W	10000lm	100lm/W	4000K	260x225x34mm
	15888	100W	10000lm	100lm/W	3000K	260x225x34mm



LED SMD FLOODLIGHT	
Milky Reflector	
Input Voltage	180-265V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
5991	20W	1600lm	80m/W	4000K	100.5x85.5x33mm
5992	30W	2400lm	80lm/W	4000K	140.5x104.5x33mm
5993	50W	4000lm	80lm/W	4000K	180x139x37.5mm





LED SMD FLOODLIGH	
White Body	
Input Voltage	180-265V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
15801	10W	900lm	90lm/W	6000K	101.5x98x26mm
15802	10W	900lm	90lm/W	4000K	101.5x98x26mm
15803	10W	900lm	90lm/W	3000K	101.5x98x26mm
15804	20W	1800lm	90lm/W	6000K	120x112.5x27.5mm
15805	20W	1800lm	90lm/W	4000K	120x112.5x27.5mm
15806	20W	1800lm	90lm/W	3000K	120x112.5x27.5mm
15807	30W	2700lm	90lm/W	6000K	156x141x30mm
15808	30W	2700lm	90lm/W	4000K	156x141x30mm
15809	30W	2700lm	90lm/W	3000K	156x141x30mm
15810	50W	4500lm	90lm/W	6000K	188x170x32mm
15811	50W	4500lm	90lm/W	4000K	188x170x32mm
15812	50W	4500lm	90lm/W	3000K	188x170x32mm
15813	100W	9000lm	90lm/W	6000K	242x212x33.5mm
15814	100W	9000lm	90lm/W	4000K	242x212x33.5mm
15815	100W	9000lm	90lm/W	3000K	242x212x33.5mm



LED SMD FLOODLIGH	
With PIR Sensor - White Body	
Input Voltage	180-265V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
15837	10W	900lm	90lm/W	6000K	97x169x54mm
15838	10W	900lm	90lm/W	4500K	97x169x54mm
15839	10W	900lm	90lm/W	2700K	97x169x54mm
15840	20W	1800lm	90lm/W	6000K	121x190x54mm
15841	20W	1800lm	90lm/W	4500K	121x190x54mm
15842	20W	1800lm	90lm/W	2700K	121x190x54mm
15843	30W	2700lm	90lm/W	6000K	154x228x55mm
15844	30W	2700lm	90lm/W	4500K	154x228x55mm
15845	30W	2700lm	90lm/W	2700K	154x228x55mm
15846	50W	4500lm	90lm/W	6000K	183x205x31.7mm
15847	50W	4500lm	90lm/W	4500K	183x205x31.7mm



LED SMD FLOODLIGH	
Black Body	
Input Voltage	180-265V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
15816	10W	900lm	90lm/W	6000K	101.5x98x26mm
15817	10W	900lm	90lm/W	4000K	101.5x98x26mm
15818	10W	900lm	90lm/W	3000K	101.5x98x26mm
15819	20W	1800lm	90lm/W	6000K	120x112.5x27.5mm
15820	20W	1800lm	90lm/W	4000K	120x112.5x27.5mm
15821	20W	1800lm	90lm/W	3000K	120x112.5x27.5mm
15822	30W	2700lm	90lm/W	6000K	156x141x30mm
15823	30W	2700lm	90lm/W	4000K	156x141x30mm
15824	30W	2700lm	90lm/W	3000K	156x141x30mm
15825	50W	4500lm	90lm/W	6000K	188x170x32mm
15826	50W	4500lm	90lm/W	4000K	188x170x32mm
15827	50W	4500lm	90lm/W	3000K	188x170x32mm
15828	100W	9000lm	90lm/W	6000K	242x212x33.5mm
15829	100W	9000lm	90lm/W	4000K	242x212x33.5mm
15830	100W	9000lm	90lm/W	3000K	242x212x33.5mm
15831	150W	13500lm	90lm/W	6000K	279.5x230x35.5mm
15832	150W	13500lm	90lm/W	4000K	279.5x230x35.5mm
15833	200W	18000lm	90lm/W	6000K	329x275x37.5mm
15834	200W	18000lm	90lm/W	4000K	329x275x37.5mm
15835	300W	27000lm	90lm/W	6000K	379x312.5x45mm
15836	300W	27000lm	90lm/W	4000K	379x312.5x45mm



LED SMD FLOODLIGH	
With PIR Sensor - Black Body	
Input Voltage	180-265V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
15848	10W	900lm	90lm/W	6000K	97x169x54mm
15849	10W	900lm	90lm/W	4500K	97x169x54mm
15850	10W	900lm	90lm/W	2700K	97x169x54mm
15851	20W	1800lm	90lm/W	6000K	121x190x54mm
15852	20W	1800lm	90lm/W	4500K	121x190x54mm
15853	20W	1800lm	90lm/W	2700K	121x190x54mm
15854	30W	2700lm	90lm/W	6000K	154x228x55mm
15855	30W	2700lm	90lm/W	4500K	154x228x55mm
15856	30W	2700lm	90lm/W	2700K	154x228x55mm
15857	50W	4500lm	90lm/W	6000K	183x205x31.7mm
15858	50W	4500lm	90lm/W	4500K	183x205x31.7mm



LED SMD FLOODLIGH	
White Body	
Input Voltage	220-240V 50/60Hz
Beam Angle	90°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
5701	10W	900lm	90lm/W	6000K	97.5x111x22mm
5702	10W	900lm	90lm/W	4500K	97.5x111x22mm
5703	10W	900lm	90lm/W	2700K	97.5x111x22mm
5704	20W	1800lm	90lm/W	6000K	121x130x23mm
5705	20W	1800lm	90lm/W	4500K	121x130x23mm
5706	20W	1800lm	90lm/W	2700K	121x130x23mm
5707	30W	2700lm	90lm/W	6000K	155x169.5x31mm
5708	30W	2700lm	90lm/W	4500K	155x169.5x31mm
5709	30W	2700lm	90lm/W	2700K	155x169.5x31mm
5710	50W	4500lm	90lm/W	6000K	183x205x31.7mm
5711	50W	4500lm	90lm/W	4500K	183x205x31.7mm
5712	50W	4500lm	90lm/W	2700K	183x205x31.7mm
5713	100W	9000lm	90lm/W	6000K	216.5x244x33mm
5714	100W	9000lm	90lm/W	4500K	216.5x244x33mm
5715	100W	9000lm	90lm/W	2700K	216.5x244x33mm



LED SMD FLOODLIGH	
With PIR Sensor - White Body	
Input Voltage	220-240V 50/60Hz
Beam Angle	90°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
5760	10W	900lm	90lm/W	6000K	97x169x54mm
5761	10W	900lm	90lm/W	4500K	97x169x54mm
5762	10W	900lm	90lm/W	2700K	97x169x54mm
5763	20W	1800lm	90lm/W	6000K	121x190x54mm
5764	20W	1800lm	90lm/W	4500K	121x190x54mm
5765	20W	1800lm	90lm/W	2700K	121x190x54mm
5766	30W	2700lm	90lm/W	6000K	154x228x55mm
5767	30W	2700lm	90lm/W	4500K	154x228x55mm
5768	30W	2700lm	90lm/W	2700K	154x228x55mm
5769	50W	4500lm	90lm/W	6000K	183x205x31.7mm
5770	50W	4500lm	90lm/W	4500K	183x205x31.7mm



LED SMD FLOODLIGH	
Black Body	
Input Voltage	220-240V 50/60Hz
Beam Angle	90°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
5721	10W	900lm	90lm/W	6000K	97.5x111x22mm
5722	10W	900lm	90lm/W	4500K	97.5x111x22mm
5723	10W	900lm	90lm/W	2700K	97.5x111x22mm
5724	20W	1800lm	90lm/W	6000K	121x130x23mm
5725	20W	1800lm	90lm/W	4500K	121x130x23mm
5726	20W	1800lm	90lm/W	2700K	121x130x23mm
5727	30W	2700lm	90lm/W	6000K	155x169.5x31mm
5728	30W	2700lm	90lm/W	4500K	155x169.5x31mm
5729	30W	2700lm	90lm/W	2700K	155x169.5x31mm
5730	50W	4500lm	90lm/W	6000K	183x205x31.7mm
5731	50W	4500lm	90lm/W	4500K	183x205x31.7mm
5732	50W	4500lm	90lm/W	2700K	183x205x31.7mm
5733	100W	9000lm	90lm/W	6000K	216.5x244x33mm
5734	100W	9000lm	90lm/W	4500K	216.5x244x33mm
5735	100W	9000lm	90lm/W	2700K	216.5x244x33mm
5736	150W	13500lm	90lm/W	6000K	250x277x33mm
5737	150W	13500lm	90lm/W	4500K	250x277x33mm
5738	200W	18000lm	90lm/W	6000K	284x318x33mm
5739	200W	18000lm	90lm/W	4500K	284x318x33mm



LED SMD FLOODLIGH	
With PIR Sensor - Black Body	
Input Voltage	220-240V 50/60Hz
Beam Angle	90°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
5771	10W	900lm	90lm/W	6000K	97x169x54mm
5772	10W	900lm	90lm/W	4500K	97x169x54mm
5773	10W	900lm	90lm/W	2700K	97x169x54mm
5774	20W	1800lm	90lm/W	6000K	121x190x54mm
5775	20W	1800lm	90lm/W	4500K	121x190x54mm
5776	20W	1800lm	90lm/W	2700K	121x190x54mm
5777	30W	2700lm	90lm/W	6000K	154x228x55mm
5778	30W	2700lm	90lm/W	4500K	154x228x55mm
5779	30W	2700lm	90lm/W	2700K	154x228x55mm
5780	50W	4500lm	90lm/W	6000K	183x205x31.7mm
5781	50W	4500lm	90lm/W	4500K	183x205x31.7mm

NEW



LED PORTABLE FLOODLIGHTS	
Rechargeable - USB Charging	
Voltage	5V DC
Beam Angle	90°
CRI	Ra>80
IP Rating	IP65
Dimmable	Yes

SKU	EQ.Watt	Lumen	Battery	Color	Dimension
15406	20W	800lm	3.2V 4Ah	6000K	283x228x52mm
15407	30W	1200lm	3.2V 8Ah	6000K	326x255x57mm
15408	50W	2000lm	3.2V 16Ah	6000K	384x303x63mm



LED SMD FLOODLIGHT	
On Stand - Foldable - Yellow Body	
Input Voltage	200-240V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP65
Dimmable	No



SKU	Watt	Lumen	Lumen/W	Color	Dimension
5403	20W	1600lm	80lm/W	6000K	174x249x252 mm
5404	30W	2400lm	80lm/W	6000K	214x292x296 mm
5405	50W	4000lm	80lm/W	6000K	254x345x337 mm



LED SMD FLOODLIGHT	
Prtable - Rechargeable + Battery	
Input Voltage	200-240V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP44
Dimmable	No



SKU	Watt	Lumen	Battery	Color	Dimension
5401	10W	600lm	3.7V 2200mAh	6000K	126x133x218mm
5402	20W	1200lm	3.7V 4400mAh	6000K	156x163x250 mm



LED SMD FLOODLIGHT	
Green Light - Black Body	
Input Voltage	200-240V 50/60Hz
Beam Angle	90°
CRI	Ra>80
IP Rating	IP65
Dimmable	No



SKU	Watt	Lumen	Lumen/W	Color	Dimension
5751	10W	900lm	90lm/W	Green	97.5x111x22mm
5752	20W	1800lm	90lm/W	Green	121x130x23mm
5753	30W	2700lm	90lm/W	Green	155x169.5x31mm



LED SOLAR POWER FLOODLIGHT	
Lighting Control + Remote Control	
Solar Panel	5V
Beam Angle	90°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	EQ.Watt	Lumen	Battery	Color	Dimension
15491	50W	650lm	5Ah	3CCT	301x175x50mm
15492	100W	1300lm	10Ah	3CCT	201x175.51mm
15493	150W	2000lm	15Ah	3CCT	250x215x52mm
15494	200W	2700lm	20Ah	3CCT	284x248x52mm
15495	300W	4100lm	30Ah	3CCT	321x280x52mm



LED CCT SOLAR FLOODLIGHT	
Remote control / Saving battery button	
Solar Panel	5V
Beam Angle	120°
CRI	Ra>80
IP Rating	IP65
Dimmable	Yes

SKU	Solar Panel	Lumen	Battery	Color	Dimension
15403	8W	1600lm	3.2V 8Ah	CCT	232x60x175mm
15404	12W	3300lm	3.2V 10Ah	CCT	280x60x215mm
15405	20W	4800lm	3.2V 15Ah	CCT	280x60x215mm



LED RGB SMD FLOODLIGHT	
Black Body + Remote Control	
Input Voltage	200-240V 50/60Hz
Beam Angle	120°
CRI	Ra>80
IP Rating	IP65
Dimmable	No



SKU	Watt	Lumen	Lumen/W	Color	Dimension
5754	10W	900lm	90lm/W	RGB	97.5x111x22mm
5755	30W	2700lm	90lm/W	RGB	155x169.5x31mm
5756	50W	4500lm	90lm/W	RGB	183x205x31.7mm



LED SOLAR FLOODLIGHT	
Remote control	
Solar Panel	5V
Beam Angle	120°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Solar Panel	Lumen	Battery	Color	Dimension
5460	12W	800lm	3.2V 5.5Ah	6000K	205x170x55mm
5461	16W	1300lm	3.2V 11Ah	6000K	245x210x65mm
5462	20W	1800lm	6.4V 11Ah	6000K	275x235x65mm



LED SOLAR POWER FLOODLIGHT	
With Solar Panel and Remote	
Solar Panel	5V
Beam Angle	90°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	EQ.Watt	Lumen	Battery	Color	Dimension
5291	6W	800lm	3.2V 6Ah	6000K	200x210x10mm
5292	10W	1200lm	3.2V 10Ah	6000K	210x340x10mm
5293	15W	2000lm	3.2V 15Ah	6000K	390x230x15mm
5294	20W	2600lm	3.2V 20Ah	6000K	390x300x15mm
5295	25W	3200lm	3.2V 25Ah	6000K	390x360x15mm
5296	30W	3800lm	3.2V 30Ah	6000K	390x430x15mm
5297	40W	4800lm	3.2V 40Ah	6000K	390x560x15mm
HIGH POWER 5298	40W	6000lm	3.2V 40Ah	6000K	298x225x41mm



LED CCT SOLAR FLOODLIGHT	
With Solar Panel and Remote	
Solar Panel	5V
Beam Angle	120°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	EQ.Watt	Lumen	Battery	Color	Dimension
5473	10W	1000lm	3.2V 10Ah	CCT	222x160x23.5mm
5474	20W	1800lm	3.2V 20Ah	CCT	288x208x22mm
5475	30W	2700lm	3.2V 30Ah	CCT	354x249x23mm
NO Fast Charge 5468	30W	3000lm	3.2V 30Ah	CCT	245x303x52mm



LED SOLAR POWER FLOODLIGHT	
With Solar Panel and Remote	
Solar Panel	6V
Beam Angle	120°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	EQ.Watt	Lumen	Battery	Color	Dimension
5430	8W	500lm	3.2V 5Ah	6000K	169x52x206mm
5431	16W	1200lm	3.2V 10Ah	6000K	206x52x253mm
5432	20W	1600lm	3.2V 15Ah	6000K	206x52x253mm
5433	25W	2200lm	3.2V 20Ah	6000K	245x52x303mm



LED SOLAR POWER FLOODLIGHT	
With Solar Panel and Remote	
Solar Panel	3.2V
Beam Angle	90°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	EQ.Watt	Lumen	Battery	Color	Dimension
5455	6W	400lm	3.2V 5Ah	6000K	211x43x177mm
5456	8W	500lm	3.2V 6Ah	6000K	211x43x177 mm
5457	15W	1200lm	3.2V 10Ah	6000K	211x43x271mm
5458	20W	1800lm	3.2V 20Ah	6000K	280x80x320mm
5459	30W	2400lm	3.2V 25Ah	6000K	280x80x320mm

LED SMD PORTABLE FLOODLIGHT

Solar Panel Power: 6V / 2.3W

Flux	1850lm
Battery	3.7V 8Ah
Body Color	Yellow
Beam Angle	120°
CRI	Ra>80
Dimension	215x175x55mm

- SOS Emergency Light

- Power Bank Function

- USB Ports

SKU

CCT5464



TRIPOD FOR FLOODLIGHTS

With Cross Bar

Body Color	Black , Yellow
Material	Iron
Dimension	157x64x64mm
Height Adjustment	64-157cm
Sections	3 Pcs

SKU

Black6686

Yellow6687



FLOODLIGHT SPIKE

Aluminium

SKU

160x35cm6682

265x55cm6683

BILLBOARD STAND

Iron

SKU

150x500cm6684

200x800cm6685

TERMINAL BLOCK

Waterproof Box IP68

Rated Voltage	250V	Wire Range	0.5-1.5mm2
Rated Current	16A	Wire Range T	0.5-3.5mm2

SKU

Straight6641

T-Shape6642



TERMINAL BLOCK Professional

Polycarbonate - Waterproof Box IP68

Rated Voltage	450V	Material	Polycarbonate
Rated Current	16A	Dimension	120x35x50mm

SKU

*250V 2-Way6647

3-Way6648



TERMINAL BLOCK Professional

Metal - Waterproof Box IP68

Rated Voltage	450V	Material	Cast Alu
Rated Current	24A	Dimension	80x75x60mm

SKU

2-Way6509

3-Way6510

4-Way6511

4-X-Way6512



TERMINAL BLOCK SPLITTER

Waterproof Box IP68

Rated Voltage	450V	Material	Polycarbonate
Rated Current	24A	Wire Range	0.5-4mm2

SKU

*250V 16A 2-Way6643

3-Way6644

4-Way6645

4-X-Way6646





LED Street and Industrial Light

LED industrial lights are engineered for efficiency, durability, and performance, making them the ideal solution for demanding environments such as warehouses, factories, and production facilities. Available in multiple designs — from high bays and low bays to linear fixtures — they deliver powerful illumination while reducing energy and maintenance costs. Built to meet strict industry standards, they ensure reliable lighting for every application.

Features:

- Up to 80% energy savings compared to conventional lighting
- Wide variety of shapes and fixture types (high bay, low bay, linear, bulb)
- Extended lifespan with consistent reliability
- Multiple mounting options for easy installation
- Designed and certified to meet industrial standards

Applications:

- Warehouses and logistics centers
- Factories, workshops, and production sites
- Heavy-duty industrial environments
- Specialized lighting setups for large-scale operations

NEW



LED SOLAR STREET LIGHT	
Solar Power + Remote	
Solar	5V
Beam Angle	120°
CRI	Ra>80
IP Rating	IP65
Dimmable	YES

SKU	EQ.Watt	Lumen	Battery	Color	Dimension
9276	25W	3600lm	5V/25Ah	6000K	534x215x79mm
9277	30W	4100lm	5V/30Ah	6000K	534x215x79mm
9278	40W	5200lm	5V/40Ah	6000K	534x215x79mm
9279	45W	6000lm	5V/45Ah	6000K	534x215x79mm

LED SOLAR STREET LIGHT	
Solar Power + Remote + PIR Sensor	
Body Color	Black
Beam Angle	120°
CRI	Ra>70
IP Rating	IP65
Dimmable	No



SKU	EQ.Watt	Lumen	Battery	Color	Dimension
9126	8W	500lm	3.2V 5AH	6000K	390x193x47mm
9127	12W	1200lm	3.2V 10AH	6000K	484x218x53mm
9128	15W	1800lm	3.2V 15AH	6000K	620x237x54mm



NEW



LED HYBRID SOLAR / AC STREET LIGHT	
Hybrid Power + Remote + PIR Sensor	
Voltage	100-277V 50/60Hz
Beam Angle	140°x70°
CRI	Ra>80
IP Rating	IP65
Dimmable	YES

SKU	EQ.Watt	Lumen	Battery	Color	Dimension
9281	40W	6600lm	9.6V 12AH	2CCT	506.5x305.5x251mm
9282	60W	9600lm	12.8V 12AH	2CCT	649x306x251mm
9283	Bird Spike for SKU:9281-9282				



LED SOLAR STREET LIGHT	
Solar Power + Remote	
Body Color	Black
Beam Angle	60°
CRI	Ra>70
IP Rating	IP66
Dimmable	No

SKU	EQ.Watt	Lumen	Battery	Color	Dimension
9141	30W	4300lm	3.2V30AH	6000K	413x231x47mm
9142	40W	5200lm	3.2V 35AH	6000K	511x231x47mm
9143	50W	6300lm	3.2V 45AH	6000K	722x251x47mm



LED SOLAR STREET LIGHT	
Solar Power + Remote + PIR Sensor	
Body Color	Black
Beam Angle	120°
CRI	Ra>70
IP Rating	IP65
Dimmable	No



SKU	EQ.Watt	Lumen	Battery	Color	Dimension
9145	8W	1200lm	5V 8AH	6000K	413x231x47mm
9146	12W	1800lm	5V 12AH	6000K	511x231x47mm
9147	20W	2700lm	5V 18AH	6000K	722x251x47mm



STREET LIGHTS - NEMA BASE	
PREMIUM LINE	
LUMILEDS CHIP - Grey	
Input Voltage	180-265V 50/60Hz
Beam Angle	75°x135°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
9261	50W	6500lm	130lm/W	6000K	161x390x157mm
9262	50W	6500lm	130lm/W	4000K	161x390x157mm
9263	100W	13000lm	130lm/W	6000K	186x475x157mm
9264	100W	13000lm	130lm/W	4000K	186x475x157mm
9265	150W	19500lm	130lm/W	6000K	203x528x157mm
9266	150W	19500lm	130lm/W	4000K	203x528x157mm
9267	200W	26000lm	130lm/W	6000K	226x590x156mm
9268	200W	26000lm	130lm/W	4000K	226x590x156mm
9270	3 -PIN NEMA Sensor				94x42x40mm



LED SOLAR STREET LIGHT	
Remote + PIR Sensor + USB-C for Charging	
Body Color	Black
Beam Angle	120°
CRI	Ra>70
IP Rating	IP65
Dimmable	No



SKU	Solar Panel	Lumen	Battery	Color	Dimension
9291	8W	1500lm	5V 8AH	6000K	343x192x72mm
9292	12W	2250lm	5V 12AH	6000K	454x216x72mm
9293	18W	2800lm	5V 15AH	6000K	525x243x72mm
9294	24W	3600lm	5V 20AH	6000K	638x258x72mm
9295	24W	4500lm	5V 25AH	6000K	638x258x72mm



LED STREET LIGHT	
PREMIUM LINE	
High Lumens PF>0.9	
Input Voltage	180-265V 50/60Hz
Beam Angle	75x130°
CRI	Ra>70
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
9227	100W	15000lm	150lm/W	6000K	404x206x70mm
9225	100W	15000lm	150lm/W	4000K	404x206x70mm
9228	150W	22500lm	150lm/W	6000K	492x248x76mm
9226	150W	22500lm	150lm/W	4000K	492x248x76mm
9229	200W	30000lm	150lm/W	6000K	574x275x76mm



LUMILEDS
CHIPS

5
Years
Warranty

LED STREET LIGHT	
PREMIUM LINE	
High Lumens PF>0.9	
Input Voltage	180-265V 50/60Hz
Beam Angle	75x130°
CRI	Ra>70
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Colour	Dimension
9250	30W	3600lm	120lm/W	6000K	ø270x91 mm
9251	30W	3600lm	120lm/W	4000K	ø270x91 mm
9252	30W	3600lm	120lm/W	3000K	ø270x91 mm
9241	50W	6000lm	120lm/W	6000K	456x120x83mm
9242	50W	6000lm	120lm/W	4000K	456x120x83mm
9243	50W	6000lm	120lm/W	3000K	456x120x83mm
9244	100W	12000lm	120lm/W	6000K	527x144x83
9245	100W	12000lm	120lm/W	4000K	ø270x91 mm
9246	100W	12000lm	120lm/W	3000K	ø270x91 mm
9247	200W	24000lm	120lm/W	6000K	ø270x91 mm
9248	200W	24000lm	120lm/W	4000K	ø270x91 mm
9249	200W	24000lm	120lm/W	3000K	ø270x91 mm



LED STREET LIGHT	
PREMIUM LINE	
High Lumens - Moso Driver PF>0.9	
Input Voltage	100-240V 50/60Hz
Beam Angle	120°
CRI	Ra>70
IP Rating	IP66
Dimmable	No

5
Years
Warranty

MOSO
Driver

HIGH
Lumens

SKU	Watt	Lumen	Lumen/W	Colour	Dimension
9196	80W	11200lm	140lm/W	5700K	573x235x85mm
9197	100W	14000lm	140lm/W	5700K	585x235x85mm
9198	150W	21000lm	140lm/W	5700K	773x236x100mm
9199	180W	25200lm	140lm/W	5700K	773x236x100mm



NEMA Photocell (ON/OFF)

LED STREET LIGHT	
PREMIUM LINE	
Moso Driver - Bridgelux 0-10V Dimmable	
Input Voltage	100-240V 50/60Hz
Beam Angle	120°
CRI	Ra>70
IP Rating	IP66
Dimmable	YES (0-10V)
Color	6000K

5
Years
Warranty

MOSO
Driver

HIGH
Lumens

SKU	Watt	Lumen	Lumen/W	Photocell	Dimension
9189	75W	10500lm	140lm/W	No	580x280x190mm
9194	75W	10500lm	140lm/W	Yes	580x280x190mm
9190	100W	13500lm	135lm/W	No	580x280x190mm
9195	100W	13500lm	135lm/W	Yes	580x280x190mm
9192	200W	26000lm	130lm/W	No	580x280x190mm



LED STREET LIGHT	
PREMIUM LINE	
High Lumens PF>0.9	
Input Voltage	220-240V 50/60Hz
Beam Angle	120°
CRI	Ra>70
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
9181	150W	14250lm	95lm/W	5700K	705x365x156mm
9182	200W	19000lm	95lm/W	5700K	315x105x115mm



LED STREET LIGHT	
PREMIUM LINE	
High Lumen - Moso Driver	
Input Voltage	220-240V 50/60Hz
Beam Angle	120°
CRI	Ra>70
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
9180	120W	18000lm	150lm/W	5700K	650x160x76 mm



LED STREET LIGHT	
PREMIUM LINE	
High Lumen - Surge Protection	
Input Voltage	100-240V 50/60Hz
Beam Angle	120°
CRI	Ra>70
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
9157	50W	7500lm	150lm/W	6000K	494x155x76 mm



LED STREET LIGHT	
2 PCS BOX - PF>0.9	
Input Voltage	220-240V 50/60Hz
Beam Angle	120°
CRI	Ra>70
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
9171	20W	2000lm	100lm/W	6000K	300x105x50mm
9172	50W	5000lm	100lm/W	6000K	405x160x50mm
9173	80W	8000lm	100lm/W	6000K	500x190x70mm



LED STREET LIGHT ADAPTERS

Matt Grey



SKU 9117
ø80mm to ø60mm



SKU 9118
ø60mm to ø45mm



SKU 9119
ADJUSTABLE ANGLE +45° ; -45°
ø60mm - ø60mm





LED STREET LIGHT	
Slim Line PF>0.9	
Input Voltage	180-265V 50/60Hz
Beam Angle	75x130°
CRI	Ra>70
IP Rating	IP65
Dimmable	No

SANAN

CHIP

SKU	Watt	Lumen	Lumen/W	Color	Dimension
9231	30W	3000lm	100lm/W	6000K	424x76x108mm
9232	30W	3000lm	100lm/W	4000K	424x76x108mm
9233	50W	5000lm	100lm/W	6000K	508x76x108mm
9234	50W	5000lm	100lm/W	4000K	508x76x108mm
9235	100W	10000lm	100lm/W	6000K	597x76x108mm
9236	100W	10000lm	100lm/W	4000K	597x76x108mm



LED STREET LIGHT	
Adjusting Angle PF>0.9	
Input Voltage	180-265V 50/60Hz
Beam Angle	75x135°
CRI	Ra>70
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
9216	20W	2000lm	100lm/W	6000K	438x128mm
9217	20W	2000lm	100lm/W	4500K	438x128mm
9218	20W	2000lm	100lm/W	2700K	438x128mm
9201	30W	3000lm	100lm/W	6000K	438x128mm
9202	30W	3000lm	100lm/W	4500K	438x128mm
9203	30W	3000lm	100lm/W	2700K	438x128mm
9210	150W	15000lm	100lm/W	6000K	638x210mm
9212	150W	15000lm	100lm/W	2700K	638x210mm
9213	200W	20000lm	100lm/W	6000K	695x235mm



LED STREET LIGHT	
Slim Line - Sensor Day/Night PF>0.9	
Input Voltage	180-265V 50/60Hz
Beam Angle	75x130°
CRI	Ra>70
IP Rating	IP65
Dimmable	No

SANAN

CHIP

SKU	Watt	Lumen	Lumen/W	Color	Dimension
9237	30W	3000lm	100lm/W	4000K	424x76x108mm
9238	50W	5000lm	100lm/W	4000K	508x76x108mm
9239	100W	10000lm	100lm/W	4000K	597x76x108mm



LED STREET LIGHT	
Grey Body Color PF>0.9	
Input Voltage	220-240V 50/60Hz
Beam Angle	75x135°
CRI	Ra>70
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
9221	50W	5000lm	100lm/W	6000K	400x153x76mm
9222	100W	10000lm	100lm/W	6000K	500x196x76mm
9223	150W	15000lm	100lm/W	6000K	542x214x76mm
9224	200W	20000lm	100lm/W	6000K	609x234x76mm



LED INDUSTRIAL LIGHT	
PREMIUM LINE	
UFO High Bay PF>0.9	
Input Voltage	180-265V 50/60Hz
Beam Angle	90°
CRI	Ra>70
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
8227	100W	15000lm	150lm/W	6000K	ø270x91 mm
8248	100W	15000lm	150lm/W	4000K	ø270x91 mm
8228	150W	30000lm	150lm/W	6000K	ø270x91 mm
8249	150W	30000lm	150lm/W	4000K	ø270x91 mm
8229	200W	45000lm	150lm/W	6000K	ø300.96.5 mm
8250	200W	45000lm	150lm/W	4000K	ø300x96.5mm



* Sensor and Remote not included

LED INDUSTRIAL LIGHT UFO High Bay			
PREMIUM LINE			
Power Selectable - 3CCT Light PF>0.9			
Power	150W-200W-250W	Beam Angle	90°
Input Voltage	AC100-265V	CRI	Ra>70
Lumens	45000lm MAX	IP Rating	IP65
Size	ø313x214mm	Dimmable	No
SKU	8196		
Color	Black		
     			
Sensor	8197		
• Bi-level dimming, daylight threshold and dusk/dawn function.			
Remote	8198		
• Detection Area • Holdtime Daylight; • Threshold Standby Period • Dimming Level:			



LED INDUSTRIAL LIGHT	
PREMIUM LINE	
UFO High Bay PF>0.9	
Input Voltage	180-265V 50/60Hz
Beam Angle	90°
CRI	Ra>70
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
8190	100W	18000lm	180lm/W	5700K	ø307x156 mm
8191	150W	27000lm	180lm/W	5700K	ø307x156 mm
8192	200W	36000lm	180lm/W	5700K	ø380x180 mm
8193	U BRACKET FOR CEILING MOUNTING for SKU:8190-8192				
8194	U BRACKET FOR WALL MOUNTING for SKU:8190-8192				
8195	SECURITY CABLE for SKU:8190-819				
 					



LED INDUSTRIAL LIGHT	
UFO High Bay PF>0.9	
Input Voltage	180-265V 50/60Hz
Beam Angle	120°
CRI	Ra>70
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
8239	50W	5000lm	100lm/W	6000K	ø270x91 mm
8240	50W	5000lm	100lm/W	4000K	ø270x91 mm
8241	100W	10000lm	100lm/W	6000K	ø270x91 mm
8242	100W	10000lm	100lm/W	4000K	ø270x91 mm
8243	150W	15000lm	100lm/W	6000K	ø300.96.5 mm
8244	150W	15000lm	100lm/W	4000K	ø300x96.5mm
8245	200W	20000lm	100lm/W	6000K	ø330x103 mm
8246	200W	20000lm	100lm/W	4000K	ø330x103 mm
8247	300W	30000lm	100lm/W	6000K	ø372x108.5 mm

NEW



LED INDUSTRIAL LIGHT - 50W	
High Bay - UFO - Linkable	
Input Voltage	180-265V 50/60Hz
Beam Angle	90°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU 8262

Accessories for connecting two high-bay lights



SKU 8264

Accessories for connecting four high-bay lights



SKU	Watt	Lumen	Lumen/W	Color	Dimension
-----	------	-------	---------	-------	-----------

8261	50W	6000lm	120lm/W	3CCT	177x177x54mm
------	-----	--------	---------	------	--------------

SKU 8263

Accessories for connecting three high-bay lights



SKU 8265

Accessories for connecting six high-bay lights



*Linkable – Supports multiple configurations! High-bay lights are not included with the accessories! Images are for illustrative purposes only!



LED INDUSTRIAL LIGHT	
High Bay PF>0.9	
Input Voltage	220-240V 50/60Hz
Beam Angle	90°
CRI	Ra>70
IP Rating	IP65
Dimmable	No



LED INDUSTRIAL LIGHT	
High Bay Slim Line - PF>0.9	
Input Voltage	220-240V 50/60Hz
Beam Angle	90°
CRI	Ra>70
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
8221	100W	10000lm	100lm/W	6000K	200x200x103mm
8222	100W	10000lm	100lm/W	4500K	200x200x103mm
8223	150W	15000lm	100lm/W	6000K	260x260x105mm
8224	150W	15000lm	100lm/W	4500K	260x260x105mm
8225	200W	20000lm	200lm/W	6000K	320x320x111mm
8226	200W	20000lm	200lm/W	4500K	320x320x111mm

SKU	Watt	Lumen	Lumen/W	Color	Dimension
8231	50W	5000lm	100lm/W	6000K	ø226x30 mm
8232	50W	5000lm	100lm/W	4500K	ø226x30 mm
8234	100W	10000lm	100lm/W	4500K	ø280x30 mm
8235	150W	15000lm	100lm/W	6000K	ø340x30 mm
8236	150W	15000lm	100lm/W	4500K	ø340x30 mm
8237	200W	20000lm	100lm/W	6000K	ø400x30 mm
8238	200W	20000lm	100lm/W	4500K	ø400x30 mm



HANGING ACCESSORIES
FOR SKU: 8251-8258 - 1m

SKU 7506



LED INDUSTRIAL LIGHT	
Linear High Bay - Aluminium - IK08	
Input Voltage	220-240V 50/60Hz
Beam Angle	120x60°
CRI	Ra>80
IP Rating	IP6
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
8251	50W	5000lm	100lm/W	6000K	343x118x92mm
8252	50W	5000lm	100lm/W	4000K	343x118x92mm
8253	100W	10000lm	100lm/W	6000K	603x118x92mm
8254	100W	10000lm	100lm/W	4000K	603x118x92mm
8255	150W	15000lm	100lm/W	6000K	885x118x92mm
8256	150W	15000lm	100lm/W	4000K	885x118x92mm
8257	200W	20000lm	100lm/W	6000K	1134x118x92mm
8258	200W	20000lm	100lm/W	4000K	1134x118x92mm

NEW



LUMILEDS CHIPS	
130 Lumens/W	
5 Years Warranty	
STADIUM LIGHTS	
PREMIUM LINE	
LUMILEDS CHIP - Grey	
Voltage	180-240V 50/60Hz
Beam Angle	90°
CRI	Ra>70
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
9271	240W	31200lm	130lm/W	6000K	463x120x95mm
9272	480W	62400lm	130lm/W	6000K	463x245x95mm
9273	960W	5000lm	130lm/W	6000K	463x620x95mm



LED INDUSTRIAL LIGHT	
Linear High Bay	
Input Voltage	220-240V 50/60Hz
Beam Angle	120x60°
CRI	Ra>70
IP Rating	IP44
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
8151	50W	5000lm	100lm/W	6000K	315x105x115mm
8152	50W	5000lm	100lm/W	4500K	315x105x115mm
8153	100W	10000lm	100lm/W	6000K	570x105x115mm
8154	100W	10000lm	100lm/W	4500K	570x105x115mm
8155	150W	15000lm	100lm/W	6000K	845x105x115mm
8156	150W	15000lm	100lm/W	4500K	845x105x115mm
8157	200W	20000lm	100lm/W	6000K	1110x105x115mm
8158	200W	20000lm	100lm/W	4500K	1110x105x115mm



5 Years Warranty	
LED INDUSTRIAL LIGHT	
PREMIUM LINE	
Stadium Floodlight	
Input Voltage	100-240V 50/60Hz
Beam Angle	90°
CRI	Ra>70
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
9175	100W	10000lm	100lm/W	5700K	364x273x56mm
9176	150W	16500lm	110lm/W	5700K	415x308x58mm
9177	240W	26400lm	110lm/W	5700K	425x341x68mm
9178	480W	68000lm	142lm/W	5700K	649x448x68mm



LED Wall and Step Lights

Bring style and safety to your outdoor spaces with LED wall and step lights. Built to withstand all weather conditions, they combine robust construction with energy-efficient technology, ensuring reliable performance year-round. Available in a variety of shapes and finishes, these lights don't just illuminate — they also create stylish accents for both modern and classic settings.

Features:

- Up to 80% energy savings compared to traditional lighting
- Durable design for outdoor use in homes, gardens, and parks
- Wide choice of forms, shapes, and colours
- Options for discrete accent lighting, spot lighting, or main illumination
- Easy installation with long service life
- Available with or without integrated bulbs

Applications:

- Wall or pylon-mounted installations
- Pathways, lanes, alleys, and stairways
- Decorative lighting for gardens, courtyards, and parks
- Enhancing safety in outdoor residential or public areas



NEW



Cable with Female Connector - 1M
SKU 7142



T-Connector
SKU 7143

LED WALL WASHER - PROGRAMMABLE

100cm - Control mode: SPI 44Pixels

Power	18W	Beam Angle	120°
Input Voltage	DC 24V	CRI	Ra>80
Lumens	1800lm	IP Rating	IP66
Size	1000x26x26mm	Dimmable	Yes

SKU	7141
Color	RGB+W



LED Wall Washers



JOINING CABLE

SKU 7137

LED WALL WASHERS

30°

Input Voltage	220-240V 50/60Hz
Beam Angle	30°
CRI	Ra>70
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
7134	9W	700lm	78lm/W	6000K	500x30x25mm
7131	9W	700lm	78lm/W	2700K	500x30x25mm
7135	18W	1400lm	78lm/W	6000K	1000x30x25mm
7132	18W	1400lm	78lm/W	2700K	1000x30x25mm
7136	36W	3600lm	78lm/W	6000K	1000x30x25mm
7133	36W	3600lm	78lm/W	2700K	1000x30x25mm



LED WALL WASHER / SPOT

Spike Included


Input Voltage	180-265V 50/60Hz
Beam Angle	5°
CRI	Ra>70
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Lumen/W	Color	Dimension
7499	10W	800lm	80lm/W	4000K	ø133x83mm




	White	White	Black	Black	Grey	Grey
SKU	7506	7505	7504	7503	7508	7507
Color	4200K	3000K	4200K	3000K	4200K	3000K

LED WALL/STEPS LIGHT					
2W - Round - IP65					
Power	2W	Beam Angle	55°		
Input Voltage	AC220-240V 50Hz	CRI	Ra>80		
Lumens	80lm	IP Rating	IP65		
Size	ø150x27 mm	Dimmable	No		

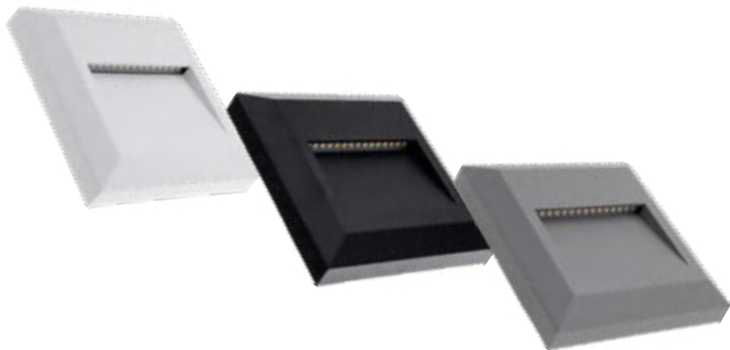

	White	White	Black	Black	Grey	Grey
SKU	7512	7511	7510	7509	7514	7513
Color	4200K	3000K	4200K	3000K	4200K	3000K

LED WALL/STEPS LIGHT					
2W - Square - IP65					
Power	2W	Beam Angle	55°		
Input Voltage	AC220-240V 50Hz	CRI	Ra>80		
Lumens	80lm	IP Rating	IP65		
Size	124x124x27mm	Dimmable	No		

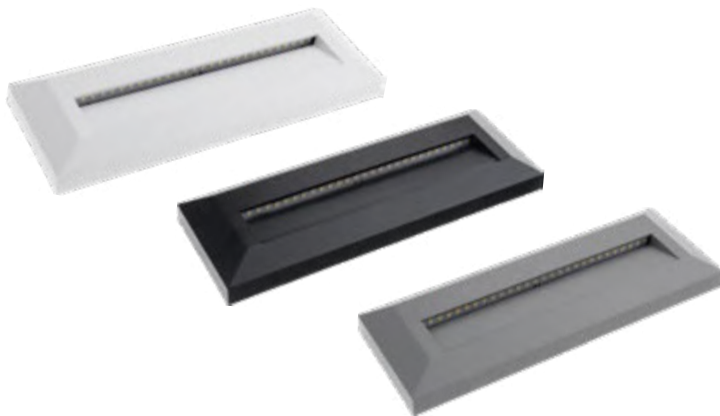

	White	White	Black	Black	Grey	Grey
SKU	7518	7517	7516	7515	7520	7519
Color	4200K	3000K	4200K	3000K	4200K	3000K

LED WALL/STEPS LIGHT					
3W - Rectangular - IP65					
Power	3W	Beam Angle	65°		
Input Voltage	AC220-240V 50Hz	CRI	Ra>80		
Lumens	100lm	IP Rating	IP65		
Size	230x80x28mm	Dimmable	No		



	Black	Black	Gray	Gray	White	White
SKU	7556	7555	7558	7557	7560	7559
Color	4000K	3000K	4000K	3000K	4000K	3000K

LED STEPS LIGHT					
1W - PIR Sensor					
Power	1W	Beam Angle	90°		
Input Voltage	AC85-265V 50Hz	CRI	Ra>80		
Lumens	80lm	IP Rating	IP20		
Size	86x86x30mm	Dimmable	No		



	Black	Black	White	White
SKU	7548	7547	7550	7549
Color	4200K	3000K	4200K	3000K

LED STEPS LIGHT					
3W - Square					
Power	3W	Beam Angle	75°		
Input Voltage	AC220-240V 50Hz	CRI	Ra>80		
Lumens	180lm	IP Rating	IP65		
Size	103x45x58mm	Dimmable	No		



	Round	Round	Square	Square
SKU	7523	7522	7525	7524
Color	4200K	3000K	4200K	3000K

LED STEPS LIGHT					
3W - Round/Square					
Power	3W	Beam Angle	34°		
Input Voltage	AC220-240V 50Hz	CRI	Ra>80		
Lumens	90lm	IP Rating	IP20		
Size	ø80x51mm	Dimmable	No		





	White	White	Black	Black	Grey	Grey
SKU	7454	7451	7455	7452	7456	7453
Color	4000K	3000K	4000K	3000K	4000K	3000K

LED WALL LIGHT			
6W - Square - IP54			
Power	6W	Beam Angle	0-90°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	660lm	IP Rating	IP54
Size	100x100x100mm	Dimmable	No





	White	White	Black	Black	Grey	Grey
SKU	7460	7457	7461	7458	7462	7459
Color	4000K	3000K	4000K	3000K	4000K	3000K

LED WALL LIGHT			
12W - Square - IP54			
Power	12W	Beam Angle	0-90°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	1320lm	IP Rating	IP54
Size	100x100x100mm	Dimmable	No





	White	White	Black	Black	Grey	Grey
SKU	7466	7463	7467	7464	7468	7465
Color	4000K	3000K	4000K	3000K	4000K	3000K

LED WALL LIGHT			
6W - Round - IP54			
Power	6W	Beam Angle	0-90°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	660lm	IP Rating	IP54
Size	140x115x100 mm	Dimmable	No





	White	White	Black	Black	Grey	Grey
SKU	7478	7475	7479	7476	7480	7477
Color	4000K	3000K	4000K	3000K	4000K	3000K

LED WALL LIGHT 1 HEAD			
6W - Rotatable - IP54			
Power	6W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	660lm	IP Rating	IP54
Size	110x54x97mm	Dimmable	No





	White	White	Black	Black	Grey	Grey
SKU	7484	7481	7485	7482	7486	7483
Color	4000K	3000K	4000K	3000K	4000K	3000K

LED WALL LIGHT 2 HEADS			
2x6W - Rotatable - IP54			
Power	12W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	1320lm	IP Rating	IP54
Size	221x54x97mm	Dimmable	No





	White	White	Black	Black	Grey	Grey
SKU	7472	7469	7473	7470	7474	7471
Color	4000K	3000K	4000K	3000K	4000K	3000K

LED WALL LIGHT			
6W - Triangle - IP54			
Power	6W	Beam Angle	15-90°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	660lm	IP Rating	IP54
Size	90x90x200 mm	Dimmable	No






	White	White	Black	Black	Grey	Grey
SKU	7490	7487	7491	7488	7492	7489
Color	4000K	3000K	4000K	3000K	4000K	3000K

LED WALL LIGHT

4W - Round - 4 Beam - IP54

Power	4W	Beam Angle	90°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	440lm	IP Rating	IP54
Size	ø110x93 mm	Dimmable	No

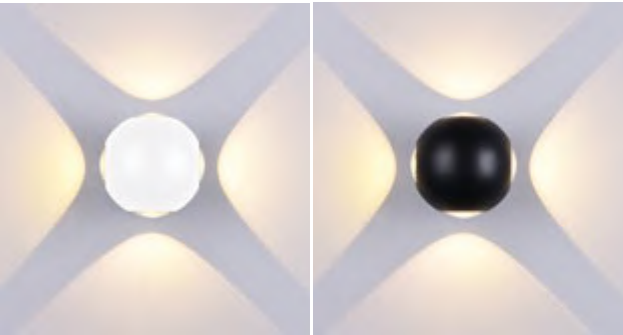



	White	Black
SKU	2089	2090
Color	3000K	3000K

LED WALL LIGHT

12W - Plastic - IP65

Power	12W	Beam Angle	90°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	1200lm	IP Rating	IP65
Size	ø160x60 mm	Dimmable	No






	White	White	Black	Black	Grey	Grey
SKU	7496	7493	7497	7494	7498	7495
Color	4000K	3000K	4000K	3000K	4000K	3000K

LED WALL LIGHT

6W - Round - 2 Beam - IP54

Power	6W	Beam Angle	90°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	660lm	IP Rating	IP54
Size	ø110x93 mm	Dimmable	No

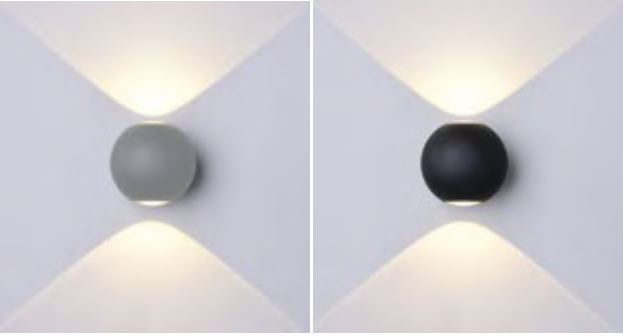



	White	Black
SKU	2091	2092
Color	3000K	3000K

LED WALL LIGHT

12W - Aluminium - IP65

Power	12W	Beam Angle	90°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	670lm	IP Rating	IP65
Size	ø150x46 mm	Dimmable	No





	Round	Round	Square	Square
SKU	7529	7528	7531	7530
Color	4200K	3000K	4200K	3000K

LED WALL / CEILING LIGHT

12W - IP65

Power	12W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	850lm	IP Rating	IP65
Size	ø172x103mm 165x165x103mm	Dimmable	No





	Round	Round	Square	Square
SKU	7533	7532	7535	7534
Color	4200K	3000K	4200K	3000K

LED WALL / CEILING LIGHT

12W - IP65

Power	12W	Beam Angle	145°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	1lm	IP Rating	IP65
Size	ø170x105mm 160x160x102mm	Dimmable	No





LED WALL LIGHT

Black - IP65

Input Voltage	AC220-240V 50Hz	Beam Angle	48°
Dimmable	No	CRI	Ra>80

SKU	Watt	Lumen	Colour	Dimension
7407	2 Lens 4W	340lm	3000K	106x80x38mm
7409	3 Lens 6W	510lm	3000K	158x80x40mm
7411	4 Lens 8W	680lm	3000K	210x80x48mm



SKU	7527	7526
Color	4200K	3000K

LED WALL LIGHT - BULKHEAD

12W - Rectangle

Power	12W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	550lm	IP Rating	IP65
Size	230x110x76mm	Dimmable	No



LED WALL LIGHT

White - IP65

Input Voltage	AC220-240V 50Hz	Beam Angle	48°
Dimmable	No	CRI	Ra>80

SKU	Watt	Lumen	Colour	Dimension
7408	2 Lens 4W	340lm	3000K	106x80x38mm
7410	3 Lens 6W	510lm	3000K	158x80x40mm
7412	4 Lens 8W	680lm	3000K	210x80x48mm



SKU	7422	7423
Color	Stainless Steel	Stainless Steel

WALL LIGHT FITTING

E27 Fitting

Socket	1xE27	Material	Aluminium
Input Voltage	AC220-240V 50Hz	Max Power	60W
Size	303x100x91mm	IP Rating	IP44



SKU	7404	7403
Color	4000K	3000K

LED WALL / CEILING LIGHT

9W - Cree Chip

Power	9W	Beam Angle	6°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	780lm	IP Rating	IP54
Size	163x100x50mm	Dimmable	No



SKU	7402	7401
Color	White	Black

WALL LIGHT FITTING

E27 Fitting

Socket	1xE27	Material	Alu+Glass
Input Voltage	AC220-240V 50Hz	Max Power	60W
Size	245x180x93mm	IP Rating	IP44





SKU

7536

Color

Grey

WALL LIGHT FITTING

E27 Fitting

Socket	1xE27	Material	Aluminium
Input Voltage	AC220-240V 50Hz	Max Power	40W
Size	230x100x104mm	IP Rating	IP54





SKU

2830

Color


3000K

LED WALL / SURFACE LIGHT

Round - Aluminium

Power	24W	Beam Angle	120°
Input Voltage	AC110-240V 50Hz	CRI	Ra>80
Lumens	2400lm	IP Rating	IP65
Size	ø255x65mm	Dimmable	No



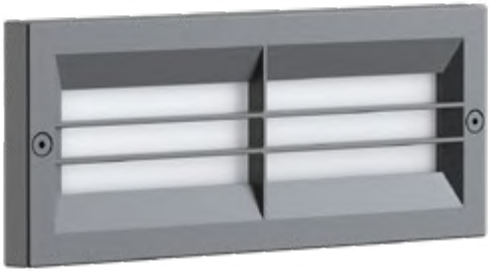

SKU

7537

Color

Grey

WALL LIGHT FITTING

E27 Fitting

Socket	1xE27	Material	Aluminium
Input Voltage	AC220-240V 50Hz	Max Power	40W
Size	220x90x87mm	IP Rating	IP54





SKU

2829

Color

3000K

LED WALL / SURFACE LIGHT

Round - Aluminium

Power	30W	Beam Angle	120°
Input Voltage	AC100-240V 50Hz	CRI	Ra>80
Lumens	3000lm	IP Rating	IP65
Size	ø225x55mm	Dimmable	No





SKU

7538

Color

Gray

WALL LIGHT FITTING

E27 Fitting

Socket	1xE27	Material	Alu+Glass
Input Voltage	AC220-240V 50Hz	Max Power	40W
Size	245x180x93mm	IP Rating	IP54





SKU

7502

Color

4200K

SKU

7501

Color

3000K

LED WALL/STEPS LIGHT

6W - Rectangular - IP65

Power	6W	Beam Angle	75°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	480 lm	IP Rating	IP65
Size	215x70x65mm	Dimmable	No





SKU	7443	7444	7445
Color	Black	White	Silver

WALL LIGHT FITTING			
GU10 Fitting - Adjustable			
Socket	1xGU10	Material	Aluminium
Input Voltage	AC220-240V 50Hz	Max Power	35W
Size	100x66x92mm	IP Rating	IP44



SKU	7434	7435	7436
Color	Black	White	Silver

WALL LIGHT FITTING			
GU10 Fitting - Adjustable			
Socket	1xGU10	Material	Aluminium
Input Voltage	AC220-240V 50Hz	Max Power	35W
Size	68x81x92mm	IP Rating	IP54



SKU	7440	7441	7442
Color	Black	White	Silver

WALL LIGHT FITTING			
GU10 Fitting - Up and Down			
Socket	2xGU10	Material	Aluminium
Input Voltage	AC220-240V 50Hz	Max Power	2x35W
Size	92x68x150mm	IP Rating	IP54



SKU	7431	7432	7433	7449
Color	Black	White	Silver	Polished

WALL LIGHT FITTING			
GU10 Fitting			
Socket	1xGU10	Material	Aluminium
Input Voltage	AC220-240V 50Hz	Max Power	35W
Size	65x81x92mm	IP Rating	IP54



SKU	7437	7438	7439	7450
Color	Black	White	Silver	Polished

WALL LIGHT FITTING			
GU10 Fitting - Up and Down			
Socket	2xGU10	Material	Aluminium
Input Voltage	AC220-240V 50Hz	Max Power	2x35W
Size	68x92x150mm	IP Rating	IP54



SKU	7446	7447	7448
Color	Black	White	Silver

WALL LIGHT FITTING			
GU10 Fitting - Up and Down			
Socket	2xGU10	Material	Aluminium
Input Voltage	AC220-240V 50Hz	Max Power	2x35W
Size	68x92x150mm	IP Rating	IP44



**LED Outdoor & Garden Lights**

Step outside with confidence and style thanks to our versatile range of outdoor lighting solutions. From elegant wall fixtures that add charm to your garden, to practical security lights that enhance safety, our products combine efficiency, durability, and design to suit every need.


Features:

- Up to 80% energy savings compared to traditional lighting
- Suitable for gardens, courtyards, and parks
- Available in multiple shapes, styles, and colours
- Options for accent, spot, or general lighting
- Models with or without integrated bulbs
- Weather-resistant and built for long-lasting use

Applications:

- Wall or pylon-mounted outdoor lighting
- Pathways, lanes, and alleys
- Decorative garden and park illumination
- Enhancing safety and ambience for residential exteriors

NEW

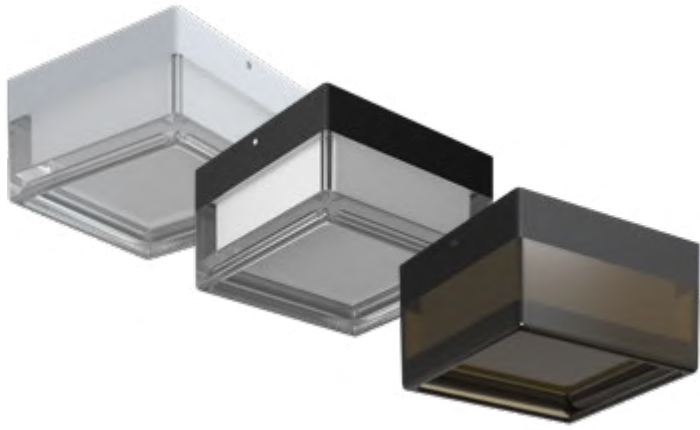

SKU	12051	12052	12053
Color	White	White/Black	Black

CCT Switch

IP65

LED OUTDOOR CEILING LIGHTS

PREMIUM LINE

Square - IP65 - 3CCT

Power	9W	Beam Angle	150°
Input Voltage	AC220-240V 50Hz	CRI	Ra>90
Lumens	900lm	IP Rating	IP65
Size	130x130x78mm	Dimmable	No



NEW



SKU	12054	12055	12056
Color	White	White/Black	Black

CCT Switch

IP65

LED OUTDOOR CEILING LIGHTS

PREMIUM LINE

Round - IP65 - 3CCT

Power	9W	Beam Angle	150°
Input Voltage	AC220-240V 50Hz	CRI	Ra>90
Lumens	900lm	IP Rating	IP65
Size	ø140x78mm	Dimmable	No



NEW



SKU	12057	12058
Color	White	White/Black

CCT Switch

IP65

LED OUTDOOR CEILING LIGHTS

PREMIUM LINE

Round - IP65 - 3CCT

Power	18W	Beam Angle	150°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	1800lm	IP Rating	IP65
Size	ø230x70 mm	Dimmable	No





1

2

3

WALL LIGHT FITTING

GU10 Fitting

Socket	2xGU10	Material	Alu
Input Voltage	AC220-240V 50Hz	Max Power	2x35W
Size 1	99x65x155 mm	IP Rating	IP54
Size 2	75x105x180 mm		
Size 3	68x90x225 mm		

SKU	7561	7562	7563
Color	Black	Black	Black

1

2

3

IP54



1

2

WALL LIGHT FITTING

E27 Fitting

Socket	1xE27	Material	Alu
Input Voltage	AC220-240V 50Hz	Max Power	1x40W
Size Up	113x155x180 mm	IP Rating	IP44
Size Down	220x230x242 mm		

SKU	7564	7565
Color	Black	Black

1

2

IP44



LED WALL LAMP

Aluminium / PIR Sensor*

Power	12W	Beam Angle	120°
Input Voltage	AC220-240V 50Hz	CRI	Ra>80
Lumens	1200lm	IP Rating	IP54
Size	ø130x140x190 mm	Dimmable	No

SKU	7414	PIR* 7415
Color	3000K	3000K

PIR



WALL AND LAWN LAMP			
E27 Fitting			
Socket	1xE27	Material	Alu+PC
Input Voltage	AC220-240V 50Hz	Max Power	40W
Size Wall	ø157x223mm	IP Rating	IP54
Size Lawn	ø145x350mm		
Size Lawn	ø145x750mm		
	Wall	35cm	75cm
SKU	7424	7426	7427
Color	Black	Black	Black



WALL AND LAWN LAMP			
E27 Fitting - PIR Sensor			
Socket	1xE27	Material	Alu+PC
Input Voltage	AC220-240V 50Hz	Max Power	40W
Size Wall	ø157x223mm	IP Rating	IP54
Size Lawn	ø145x350mm	PIR	Yes
Size Lawn	ø145x750mm		
	Wall	35cm	75cm
SKU	7425	7428	7429
Color	Black	Black	Black



PENDANT AND POLE LAMP			
E27 Fitting			
Socket	1xE27	Material	Alu+PC
Input Voltage	AC220-240V 50Hz	Max Power	40W
Size Pendant	220x220x800 mm	IP Rating	IP44
Size Pole	220x300x800 mm		
	Pendant	Pole	
SKU	7566	7567	
Color	Black	Black	



SKU	9302	9301
Color	White	Black

WALL LAMP UP

E27 Fitting

Socket	1xE27	Material	Alu+PC
Input Voltage	AC220-240V 50Hz	Max Power	60W
Size	215x170x220mm	IP Rating	IP44

SKU	9306	9305
Color	White	Black

STAND LAMP

E27 Fitting

Socket	1xE27	Material	Alu+PC
Input Voltage	AC220-240V 50Hz	Max Power	60W
Size	170x170x290mm	IP Rating	IP44

SKU	9304	9303
Color	White	Black

WALL LAMP DOWN

E27 Fitting

Socket	1xE27	Material	Alu+PC
Input Voltage	AC220-240V 50Hz	Max Power	60W
Size	215x170x220mm	IP Rating	IP44

SKU	9310	9312	9309	9311
Color	White	White	Black	Black

LAWN LAMP

E27 Fitting - 60cm / 90cm

Socket	1xE27	Material	Alu+PC
Input Voltage	AC220-240V 50Hz	Max Power	60W
Size	170x170x600mm	IP Rating	IP44
Size	170x170x900mm		

SKU	9308	9307
Color	White	Black

CEILING LAMP

E27 Fitting

Socket	1xE27	Material	Alu+PC
Input Voltage	AC220-240V 50Hz	Max Power	60W
Size	170x170x740mm	IP Rating	IP44

SKU	9315	9316
Color	Dark Grey	Dark Grey

LAWN LAMP

E27 Fitting - 80cm / 100cm

Socket	1xE27	Material	Alu+PC
Input Voltage	AC220-240V 50Hz	Max Power	60W
Size	80x80x805mm	IP Rating	IP54
Size	80x80x1005mm		



LED SOLAR WALL LIGHT

PIR Sensor

IP Rating	IP54	Beam Angle	60°
Light Color	6000K	CRI	Ra>80

SKU	Battery	Solar Panel	Lumen	Dimension
-----	---------	-------------	-------	-----------

7541	3.2V 2Ah	5.5V 1.8W	500lm	160x130x28mm
7542	3.2V 4Ah	5.5V 5W	1000lm	350x140x28mm
7543	3.2V 6Ah	5V 12.5W	1200lm	350x266x28mm

LED SOLAR WALL LIGHT

PIR Sensor

IP Rating	IP54	Beam Angle	110°
Light Color	6000K	CRI	Ra>80

SKU	Battery	Power	Lumen	Dimension
-----	---------	-------	-------	-----------

7405	5.5V 1.2Ah	0.75W	110lm	124x95x48mm
7406	7.4V 1.2Ah	1.5W	220lm	196x115x45mm

LED SOLAR WALL LIGHT

Plastic

Power	0.5W	Beam Angle	120°
Battery	3.7V 1200mAh	CRI	Ra>80
Lumens	40lm	IP Rating	IP44
Size	105x70x40mm	Dimmable	No

SKU	9352
Color	3000K



LED SOLAR LAWN / WALL LAMP

Solar Panel 5.5V 1W

Power	1W	Beam Angle	270°
Battery	3.7V 1200mAh	CRI	Ra>80
Lumens	60lm	IP Rating	IP54
Size Spike	180x116x740mm	Dimmable	No
Size Wall	230x116x150mm	Material	PC

	Spike	Wall		
SKU	9349	9350		
Color	CCT	CCT		



LED SOLAR GARDEN LIGHT

Remote Control

Power	1.8W	Beam Angle	270°
Battery	3.7V 1200mAh	CRI	Ra>80
Lumens	70lm	IP Rating	IP54
Size	160x160x213mm	Dimmable	No

SKU	9351		
Color	CCT		



LED SOLAR WALL LAMP

PIR Sensor - Dark Gray

Power	9W	Beam Angle	110°
Battery	3.7V 2000mAh	CRI	Ra>80
Lumens	400lm	IP Rating	IP44
Size Square	180x120x127mm	Dimmable	No
Size Round	160x130x190mm	Material	Alu

	Square	Round		
SKU	9347	9345		
Color	3000K	3000K		



LED SOLAR WALL LAMP

Plastic

Power	1W	Beam Angle	80°
Battery	3.7V 1800mAh	CRI	Ra>80
Lumens	60lm	IP Rating	IP44
Size	ø 85x238mm	Dimmable	No

	White	White	Black	Black	
SKU	2085	2086	2087	2088	
Color	6000K	4200K	6000K	4200K	



LED WALL/LAWN LIGHT				
Dark Gray				
Power	7W	Beam Angle	150°	
Voltage	AC:220-240V	CRI	Ra>80	
Lumens	490lm	IP Rating	IP54	
Size Wall	140x110x165mm	Dimmable	No	
Size Lawn	Φ800x123mm	Material	Alu+PC	
	Wall	Lawn		
SKU	9343	9344		
Color	3000K	3000K		



LED SOLAR LAMP				
PIR Sensor - Brushed Aluminium				
Power	2W	Beam Angle	110°	
Battery	3.7V 1200mAh	CRI	Ra>80	
Lumens	200lm	IP Rating	IP44	
Size Wall	125x195x142mm	Dimmable	No	
Size Spike	125x500x125mm	Material	Alu	
Size Pole	125x800x125mm			
	Wall	Spike	Pole	
SKU	9331	9332	9333	
Color	3000K	3000K	3000K	





LED SOLAR LAMP				
PIR Sensor - Dark Gray				
Power	9W	Beam Angle	110°	
Battery	3.7V 2000mAh	CRI	Ra>80	
Lumens	400lm	IP Rating	IP44	
Size Square	150x140x762 mm	Dimmable	No	
Size Round	150x195x762mm	Material	Alu	
	Square	Round		
SKU	9348	9346		
Color	3000K	3000K		



LED SOLAR LAMP			
PIR Sensor - Brushed Aluminium			
Power	4.4W	Beam Angle	110°
Battery	3.7V 2600mAh	CRI	Ra>80
Lumens	600lm	IP Rating	IP44
Size Wall	160x162x175mm	Dimmable	No
Size Spike	160x160x500mm	Material	Alu
Size Pole	160x160x800mm		
	Wall	Spike	Pole
SKU	9334	9335	9336
Color	3000K	3000K	3000K



PIR sensor



Solar Power



LED SOLAR LAMP			
PIR Sensor - Black			
Power	6W	Beam Angle	110°
Battery	3.7V 2200mAh	CRI	Ra>80
Lumens	600lm	IP Rating	IP44
Size Wall	161x101x210mm	Dimmable	No
Size Spike	161x902x210mm	Material	Alu
Size Pole	125x500x125mm		
	Wall	Spike	Pole
SKU	9340	9341	9342
Color	3000K	3000K	3000K





LED SOLAR LAMP			
PIR Sensor - Brushed Aluminium			
Power	4.4W	Beam Angle	110°
Battery	3.7V 2600mAh	CRI	Ra>80
Lumens	600lm	IP Rating	IP44
Size Wall	150x160x160mm	Dimmable	No
Size Spike	150x150x500mm	Material	Alu
Size Pole	150x150x800mm		

	Wall	Spike	Pole		
SKU	9337	9338	9339		
Color	3000K	3000K	3000K		





LED SOLAR LIGHT SPIKE

Solar Panel 5V 1W

Power	0.5W	Beam Angle	60°
Battery	3.2V 1200mAh	CRI	Ra>80
Lumens	90lm	IP Rating	IP65
Size	φ126x51.8mm	Dimmable	No

SKU	9357	9358	9359
Color	6000K	4000K	RGB



LED SOLAR LIGHT SPIKE

Light Brigness Control

Power	2W	Beam Angle	120°
Battery	3.7V 1800mAh	CRI	Ra>80
Lumens	160lm	IP Rating	IP65
Size	102x169x313mm	Dimmable	No

SKU	9353
Color	3000K



LED SOLAR LIGHT SPIKE

Light Brigness Control

Power	1W	Beam Angle	120°
Battery	3.7V 1200mAh	CRI	Ra>80
Lumens	80lm	IP Rating	IP65
Size	φ130x225mm	Dimmable	No

SKU	9354
Color	3000K



LED SOLAR LIGHT SPIKE

1.5W Lawn Light

Power	1.5W	Beam Angle	36°
Battery	1.2V 1500mAh	CRI	Ra>80
Lumens	60 lm	IP Rating	IP65
Size	90x330x275mm	Dimmable	No

SKU	9321	9322	9323	9324
Color	6000K	3000K	Blue	Green



Wall Mounted or
Pin Mounted

LED SOLAR LIGHT SPIKE

Solar Panel Power: 5.5V 0.6W

Power	0.6W	Beam Angle	120°
Battery	3.7V 2000mAh	CRI	Ra>80
Lumens	8 lm	IP Rating	IP65
Size	169 x 32 mm	Dimmable	No

SKU	9355	9356
Color	CCT	RGB



LAWN LIGHT FIXTURE


GU10 Socket

Socket	1xGU10	Material	PC
Input Voltage	AC220-240V 50Hz	Max Power	35W
Size	90x68x150mm	IP Rating	IP65

SKU	7413	2084
Color	Black	Black



LED GARDEN LIGHTS

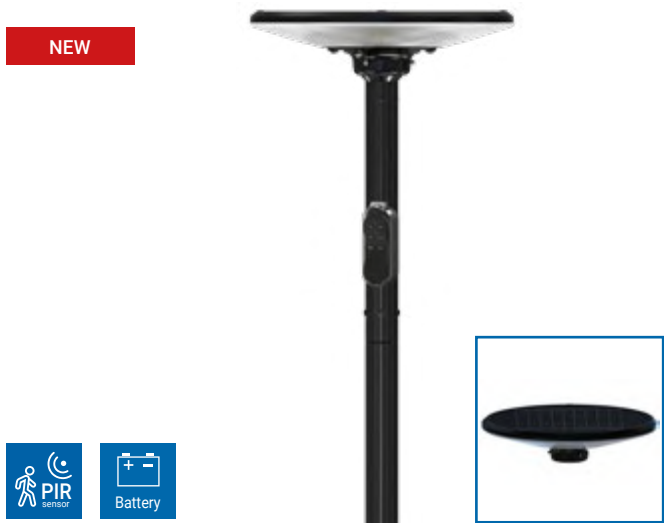

LED SOLAR GARDEN/PARK LAMP

Water Tank Stand and 2.5m Pole + Remote Control

Solar Power	5V 15W	Beam Angle	120°
Battery	3.2V /12Ah	CRI	Ra>80
Lumens	1800lm	IP Rating	IP65
Size	ø450x108mm	Dimmable	Yes

SKU	9361	
Color	Black	



GARDEN LIGHT/PARK LIGHT

Pole Not included

Power per Watt	120lm/W	Beam Angle	90°
Input Voltage	AC160-265V 50Hz	CRI	Ra>80
Lumens	9600-14400lm	IP Rating	IP54
Size	ø382x117mm	Dimmable	No

SKU	9362	9360
Color	80W	120W



LED OUTDOOR LIGHT

Built-in Spotlight

Input Voltage	220-240V 50/60Hz
Beam Angle	18°
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Watt	Lumen	Cut Size	Color	Dimension
507	1W	80lm	ø58	6000K	ø65x75mm
517	1W	80lm	ø58	2800K	ø65x75mm
501	3W	240lm	ø92	6000K	ø100x88mm
502	3W	240lm	ø92	2800K	ø100x88mm
515	5W	400lm	ø125	6000K	ø150x92mm
516	5W	400lm	ø115	2800K	ø120x92mm
550	7W	560lm	ø122	6000K	ø150x88mm
551	7W	560lm	ø140	2700K	ø150x88mm



LED UNDERGROUND LIGHT

Stainless Steel

Input Voltage	AC/DC 24V
Beam Angle	60°
CRI	Ra>80
IP Rating	IP68
Dimmable	No

SKU	Watt	Lumen	Cut Size	Color	Dimension
580	1W	75lm	ø17	6000K	ø24x45mm
581	1W	75lm	ø17	3000K	ø24x45mm
582	1W	75lm	ø17	BLUE	ø24x45mm
583	1.3W	80lm	ø17	6000K	ø24x45mm
584	1.3W	80lm	ø17	3000K	ø24x45mm
585	1.3W	80lm	ø17	BLUE	ø24x45mm





IP68

IK10

	1 Side Beam		2 Side Beam	
SKU	596	597	598	599
Color	6000K	3000K	6000K	3000K

LED UNDERGROUND LIGHT

Stainless Steel

Power	1.3W	Beam Angle	30°
Input Voltage	AC/DC 24V	CRI	Ra>80
Lumens	100lm	IP Rating	IP68
Size	ø40x50mm	Dimmable	No





IP68

SKU	590
Color	3000K

LED OUTDOOR LIGHT

Aluminium

Power	1.3W	Beam Angle	45°
Input Voltage	AC/DC 24V	CRI	Ra>80
Lumens	80lm	IP Rating	IP68
Size	ø44x85mm	Dimmable	No





IP44

SKU	863	864	865	879
Color	6000K	4000K	3000K	BLUE

LED OUTDOOR LIGHT

Aluminium

Power	1.3W	Beam Angle	60°
Input Voltage	AC/DC 24V	CRI	Ra>80
Lumens	100lm	IP Rating	IP44
Size	ø64x44mm	Dimmable	No





IP68

SKU	856
Color	4000K

LED OUTDOOR LIGHT

Aluminium

Power	7,5W	Beam Angle	30°
Input Voltage	AC/DC 24V	CRI	Ra>80
Lumens	600lm	IP Rating	IP68
Size	ø63x85mm	Dimmable	No





IP68


IK10

SKU	592	593
Color	6000K	3000K

LED UNDERGROUND LIGHT

Half Shading

Power	1.3W	Beam Angle	50°
Input Voltage	AC/DC 24V	CRI	Ra>80
Lumens	80lm	IP Rating	IP68
Size	ø60x50mm	Dimmable	No

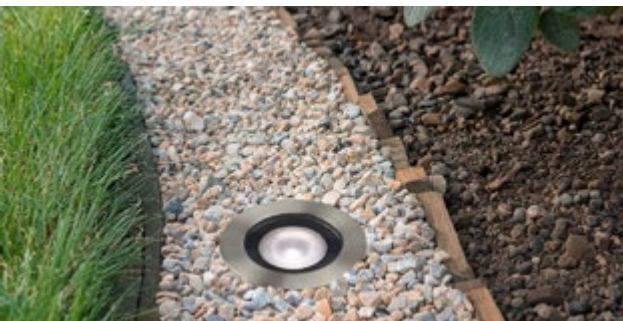



IP68

SKU	565	566	567	568
Color	RGB	Blue	Green	Amber

LED POND / WALL LIGHT

Aluminium

Power	1.3W	Beam Angle	270°
Input Voltage	AC/DC 24V	CRI	Ra>80
Lumens	100lm	IP Rating	IP68
Size	ø32x45mm	Dimmable	No





LED POOL LIGHT	
Stainless Steel	
Input Voltage	AC/DC 24V
Beam Angle	90°
CRI	Ra>80
IP Rating	IP68
Dimmable	No

SKU	Watt	Lumen	Cut Size	Color	Dimension
589	1W	75lm	ø26	RGB	ø38x35mm
591	1W	75lm	ø26	RGB	ø38x35mm
586	1.2W	80lm	ø26	6000K	ø38x35mm
587	1.2W	80lm	ø26	3000K	ø38x35mm
588	1.2W	80lm	ø26	BLUE	ø38x35mm
594	1.3W	80lm	ø25	6000K	ø35x30mm
595	1.3W	80lm	ø25	3000K	ø35x30mm



LED POOL LIGHT	
PAR 56	
Input Voltage	AC/DC 12V
Beam Angle	90°
CRI	Ra>80
IP Rating	IP68
Dimmable	No


OSRAM CHIP	SKU	Watt	Lumen	Cut Size	Color	Dimension
	571	12W	1200lm	ø58	6000K	ø178x114mm
	572	18W	1800lm	ø58	2800K	ø178x114mm

EPISTAR CHIP	With Remote Control					
	573	18W	1800lm	ø92	RGB	ø178x114mm



SKU	518	519
Shape	Round	Square

LED OUTDOOR SPOTLIGHT FIXTURE			
GU10 Socket			
Socket	1xGU10	Material	Steel+PC
Input Voltage	AC220-240V 50Hz	Max Power	35W
Size	ø110x142	IP Rating	IP67

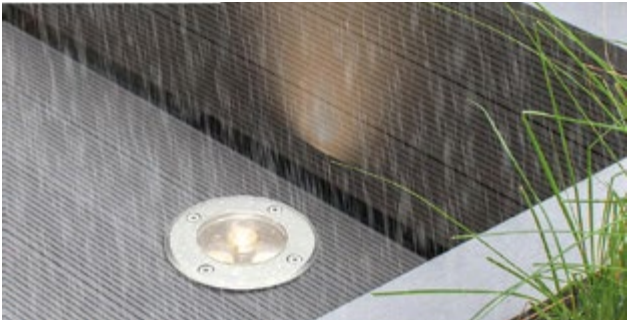

SKU	866	867	868
Color	6000K	4000K	3000K

LED OUTDOOR SPIKE LIGHT			
Stainless Steel			
Power	1.3W	Beam Angle	50°
Input Voltage	AC/DC 24V	CRI	Ra>80
Lumens	100lm	IP Rating	IP68
Size	ø42x412mm	Dimmable	No



SKU	577/873	578/872	579/874
Size	22x55mm	35x150mm	55x150mm

SLEEVE FOR LED UNDERGROUND LIGHT	
Aluminium	





LED STRING LIGHTS



OUTDOOR SOLAR STRING LIGHTS				
G50 Bulbs 20 Pcs				
Battery	3.7V 450/500mAh	Beam Angle	270°	
IP Rating	IP68	CRI	Ra>80	
SKU	Lumens	Type	Color	Dimension
9092	128lm	Milky	2700K	10m
9093	128lm	Clear	2700K	10m
9094	200lm	Milky	2700K	7m
9095	200lm	Clear	2700K	7m



OUTDOOR STRING LIGHTS	
Linkable up to 2 Strings	
Input Voltage	AC220-240V 50Hz
CRI	Ra>80
IP Rating	IP65
Dimmable	No

SKU	Watt	Bulbs	Rope Color	Color	Dimension
5056	3W	10 Pcs	Black	Colorful	8m
5092	6W	20 Pcs	Black	Colorful	13m
5090	3W	10 Pcs	White	Colorful	8m
5095	6W	20 Pcs	White	Colorful	13m
5057	3W	10 Pcs	Black	6000K	8m
5058	3W	10 Pcs	Black	2700K	8m
5093	6W	20 Pcs	Black	6000K	13m
5094	6W	20 Pcs	Black	2700K	13m
5091	3W	10 Pcs	White	2700K	8m
5096	6W	20 Pcs	White	2700K	13m



OUTDOOR STRING LIGHTS	
E27 Fitting - Linkable	
Input Voltage	AC220-240V 50Hz
Linkable	Up to 1000W(Max)
IP Rating	IP65
Dimmable	No

SKU	Fitting	E27 Fitting	Rope Color	Type	Dimension
5054	E27	10 Pcs	Black	Suspended	6m
5051	E27	15 Pcs	Black	Suspended	14.4m
5055	E27	10 Pcs	White	Suspended	6m
5053	E27	15 Pcs	White	Suspended	13m
5052	E27	15 Pcs	Black	Fixed	14.4m





Sensors



PIR MOTION SENSOR

Max Power - 300W LED

Input Voltage	AC220-240V 50Hz	Range	6m MAX
Beam Angle	360°	Time	10sec-7min
Ambient Light	10Lux-2000Lux	Material	Plastic
Size	Φ73x60mm	IP Rating	IP20

SKU

7320

7321

Color

Black

Silver



PIR MOTION SENSOR

Max Power - 300W LED

Input Voltage	AC220-240V 50Hz	Range	6m MAX
Beam Angle	360°	Time	10sec-7min
Ambient Light	10Lux-2000Lux	Material	Plastic
Size	Φ76x58mm	IP Rating	IP20

SKU

7317

Color

White



PIR MOTION SENSOR

Max Power - 100W LED

Input Voltage	AC220-240V 50Hz	Range	6m MAX
Beam Angle	360°	Time	10sec-7min
Ambient Light	10Lux-2000Lux	Material	Plastic
Size	Ø75x27mm	IP Rating	IP20

SKU

7311

Color

White



PIR MOTION SENSOR

Max Power - 300W LED

Input Voltage	AC220-240V 50Hz	Range	16m MAX
Beam Angle	360°	Time	10sec-7min
Ambient Light	10Lux-2000Lux	Material	Plastic
Size	Ø88x55mm	IP Rating	IP20

SKU

7305

Color

White



PIR MOTION SENSOR

Max Power - 1000W LED

Input Voltage	AC220-240V 50Hz	Range	8m MAX
Beam Angle	360°	Time	10sec-7min
Ambient Light	10Lux-2000Lux	Material	Plastic
Size	Ø108x25mm	IP Rating	IP20

SKU

7310

Color

White



PIR MOTION SENSOR

Max Power - 1000W LED

Input Voltage	AC220-240V 50Hz	Range	20m MAX
Beam Angle	360°	Time	10sec-7min
Ambient Light	10Lux-2000Lux	Material	Plastic
Size	113x113x58mm	IP Rating	IP54

SKU

7323

Color

White




PIR MOTION SENSOR

Max Power - 300W LED

Input Voltage	AC220-240V 50Hz	Range	8m MAX
Beam Angle	360°	Time	10sec-7min
Ambient Light	10Lux-2000Lux	Material	Plastic
Size	Ø80x62mm	IP Rating	IP20

SKU7312

ColorWhite





SMOKE ALARM

85dB

Input Voltage	DC 9V	Material	Plastic
Alarm Sound	85dB (3m)	IP Rating	IP20
Working Temp.	-20°C/+40°C	Low battery alert	7-15 days
Size	Φ132x40.5	*Battery not included	

SKU7325

ColorWhite




PIR MOTION SENSOR

Max Power - 300W LED

Input Voltage	AC220-240V 50Hz	Range	2-16m MAX
Beam Angle	300°	Time	10sec-7min
Ambient Light	10Lux-2000Lux	Material	Plastic
Size	156x117mm	IP Rating	IP44

SKU7313

ColorWhite






PIR MOTION SENSOR

Max Power - 300W LED

Input Voltage	AC220-240V 50Hz	Range	12m MAX
Beam Angle	180°	Time	10sec-7min
Ambient Light	10Lux-2000Lux	Material	Plastic
Size	85x79x94mm	IP Rating	IP44

SKU73027301

ColorBlackWhite






PIR MOTION SENSOR

Max Power - 400W LED

Input Voltage	AC220-240V 50Hz	Range	9m MAX
Beam Angle	160°	Time	10sec-7min
Ambient Light	10Lux-2000Lux	Material	Plastic
Size	79x79x43mm	IP Rating	IP20

SKU7322

ColorWhite






PIR MOTION SENSOR

Max Power - 200W LED

Input Voltage	AC220-240V 50Hz	Range	12m MAX
Beam Angle	180°	Time	10sec-7min
Ambient Light	10Lux-2000Lux	Material	Plastic
Size	79x56x68mm	IP Rating	IP54

SKU73077306

ColorBlackWhite






PIR MOTION SENSOR

Max Power - 100W LED

Input Voltage	AC220-240V 50Hz	Range	9m MAX
Beam Angle	160°	Time	10sec-7min
Ambient Light	10Lux-2000Lux	Material	Plastic
Size	80x80x36mm	IP Rating	IP20

SKU7303

ColorWhite






PIR MOTION SENSOR

Max Power - 400W LED

Input Voltage	AC220-240V 50Hz	Range	16m MAX
Beam Angle	180°	Time	10sec-7min
Ambient Light	10Lux-2000Lux	Material	Plastic
Size	118x70x125mm	IP Rating	IP54

SKU7318

ColorBlack





MICROWAVE SENSOR

Max Power - 300W LED

Input Voltage	AC220-240V 50Hz	Range	6m MAX
Beam Angle	180°/300°	Time	10sec-15min
Wave Radar	5.8Ghz	Material	Plastic
Size	93x42x40mm	IP Rating	IP20

SKU7315

ColorWhite



PIR MOTION SENSOR

Max Power - 100W LED

Input Voltage	AC220-240V 50Hz	Range	3m MAX
Beam Angle	120°	Time	10sec-7min
Ambient Light	10Lux-2000Lux	Material	Plastic
Size	67x45x26mm	IP Rating	IP44

SKU7319

ColorWhite



MICROWAVE SENSOR

Max Power - 300W LED

Input Voltage	AC220-240V 50Hz	Range	10m MAX
Beam Angle	180-360°	Time	10sec-15min
Wave Radar	5.8Ghz	Material	Plastic
Size	73x42x27mm	IP Rating	IP20

SKU7316

ColorWhite



MINI PIR MOTION SENSOR

Max Power - 100W LED

Input Voltage	AC220-240V 50Hz	Range	9m MAX
Beam Angle	120°	Time	10sec-7min
Ambient Light	10Lux-2000Lux	Material	Plastic
Size	57x35x25mm	IP Rating	IP20

SKU7309

ColorWhite



MICROWAVE SENSOR

Max Power - 1000W LED

Input Voltage	AC120-277V 50Hz	Range	15m MAX
Beam Angle	360°	Time	10sec-30min
Wave Radar	5.8Ghz	Material	Plastic
Size	115x83x79mm	IP Rating	IP65

SKU7324

ColorWhite



Short Distance IR

Max Power - 200W LED

Input Voltage	AC220-240V 50Hz	Range	5-6cm
Beam Angle	180°	Time	10sec-7min
Ambient Light	10Lux-2000Lux	Material	Plastic
Size	91x37x22mm	IP Rating	IP20

SKU7304

ColorWhite



2in1 PRESENCE SENSOR

Max Power - 1000W LED

Input Voltage	AC220-240V 50Hz	Range	6m MAX
Beam Angle	180/360°	Time	10sec-15min
Wave Radar	24Ghz	Material	Plastic
Size	Ø93x36mm	IP Rating	IP20

SKU7326

ColorWhite



LIGHT CONTROL SENSOR

6A MAX

Input Voltage	AC220-240V 50Hz	Power	6A Max
Working Temp.	-30°C/+50°C	Class	II
ON/OFF	10Lux / >40Lux	Material	Plastic
Size	46x44x35mm	IP Rating	IP44

SKU7314

ColorWhite/Blue



Power Strips

POWER STRIP

Standadr

Input Voltage

AC230V 50Hz

Max Current

16A

Material

Plstic , Copper

IP20

Sockets						
	3		4		5	
Size	180x55x40mm		220x55x40mm		260x55x40mm	
SKU	7601		7602		7603	
	1.5m		3m		1.5m	
Cable						

POWER STRIP

With Switch

Input Voltage

AC230V 50Hz

Max Current

16A

Material

Plstic , Copper

IP20

SWITCH

Sockets						
	3		4		5	
Size	205x55x40mm		250x55x40mm		300x55x40mm	
SKU	7607		7608		7609	
	1.5m		3m		1.5m	
Cable						

POWER STRIP

With Switch and USB-A

Input Voltage

AC230V 50Hz

Max Current

16A

Material

Plstic , Copper

IP20

SWITCH

Sockets				
	3		5	
Size	260x55x40mm		340x55x40mm	
SKU	7615		7616	
	1.5m		1.5m	
Cable				

POWER STRIP

With Switch and USB-A ; USB-C

Input Voltage

AC230V 50Hz

Max Current

16A

Material

Plstic , Copper

IP20

SWITCH

Sockets				
	3		5	
Size	290x50x40mm		360x50x40mm	
SKU	7617		7618	
	1.5m		1.5m	
Cable				

POWER STRIP

With Switch - Waterproof

Input Voltage

AC230V 50Hz

Max Current

16A

Material

Plstic , Copper

IP44

SWITCH

Sockets				
	4		6	
Size	350x75x50mm		470x75x50mm	
SKU	7613		7614	
	5m		10m	
Cable				

CABLE REEL

Input Voltage

AC230V 50Hz

Max Current

16A

Sockets

4

IP20

Reel:				
	1100W(4.35A)		1100W(4.8A)	
Unreel:	3200W(13.91A)		3200W(13.91)	
SKU	7624		7623	
	10m		25m	
Cable				

Garden Power Strip

with Ground Spike

Input Voltage

AC230V 50Hz

Max Current

16A

Cable type

H05VV-F3G

IP44

Sockets		
	2	2
		Timer
SKU	7625	7626
Cable	5m	5m

POWER PLUG/SOCKET

Input Voltage	AC230V 50Hz
Max Current	16A
Material	Plstic , Copper

				
EU plug	Male	Female	Male	Female
IP Rating	IP44	IP44	IP20	IP20
SKU	7631	7632	7633	7634
Color	Black	Black	White	White

POWER ADAPTER

Input Voltage	AC230V 50Hz
Max Current	16A
Material	Plstic , Copper

				
Sockets	2	3	2	UK to EU
IP Rating	IP44	IP20	IP20	IP20
SKU	7637	7636	7635	9517
Color	Black	White	White	Material Cooper
				9518 Iron

POWER EXTENSION CORD

Input Voltage	AC250V 50Hz
Max Current	16A
Material	Plstic , Copper



	
Sockets	1
IP Rating	IP20
SKU	7621
Cabel	10m
SKU	7622
Cabel	20m

POWER CORD
for Power Supplies

Input Voltage	AC230V 50Hz
Material	Plstic , Copper



		
Max Current	2.5A	10A
Type	2 PIN	3 PIN
SKU	6040	6041
Cable	1m	1m
SKU		6042
Cable		1m



POWER EXTENSION CORD
4x Sockets and 2xUSB TYPE-A

Power Supply :	220-240V
Current: Max.	16A
Schuko Sockets:	4
USB Ports:	2xUSB Type A
USB Charger Output:	5VDC/2.1A
Cable Lenght:	1.4m(3x1.5mm²)

SKU	7643
Color	Gray/White



CHARGING HUB
USB 5xTYPE-A and 1xTYPE-C

Type-C Port Output: 5.0V DC, 3.0A 9.0V DC, 2A 12V DC, 1.5A, Max. 18W	USB Output (A1): 5.0V DC, 3A, Max. 15W 9.0V DC, 2A, Max. 18W 12V DC, 1.5A, Max 18W USB Output (A2/A3/A4/A5): 5.0V DC, 2.4A, Max. 24W All Ports Total - 42W Max
--	--

SKU	7641
Color	White



CHARGING HUB
USB 2xTYPE-A and 4xTYPE-C

Type-C Port Output: 5.0V DC, 3.0A 9.0V DC, 3A 12V DC, 3A, 12V DC, 3A 20V DC 5A Max100W	Type-C Port Output:(20W) 5.0V DC, 3A, 9.0V DC, 2.22A, 12V DC, 1.67A, Type-A Port Output:(18W) 5.0V DC, 3A, 9V DC,2A 12V DC,1.5A
--	---

SKU	9505
Color	Black



Multi-Charger USB HUB
USB 4xTYPE-A and 1xTYPE-C

Type-C Port Output: 5.0V DC, 3.0A 9.0V DC, 2.2A 12V DC, 1.67A, Max.18W	USB Output (A1): 5.0V DC, 3A, Max. 15W 9.0V DC, 2A, Max. 18W 12V DC, 1.5A, Max 18W USB Output (A2/A3/A4): 5.0V DC, 2.4A, Max.12W All Ports Total -32W Max
--	---

SKU	7642
Color	White





NEW



4MP Wi-Fi Solar Battery IP Camera

SD - Slot

Sensor type	1/2.8" Progressive CMOS
Pixels	4 MP
Communication	2.4GHz WiFi.
Memory storage	Micro SD card (Max 256GB)
Video resolution	Stream: 2304 * 1296; Substream: 640×360
Solar panel	5V 3W
Battery	1800MAHx2 3.7V



SKU	246	247
Body	Black	White



NEW



POP UP POWER SOCKET 1.5m Cable

3AC OUTLETS + USB-A & USB-C

Input Voltage	AC220-240V	Output Current	16A
Output Power	Max 3500W	Size	350x76mm
Type A Port	5V 2.4A, Max 12W	IP Rating	IP20
Type C Port	5V 3A, Max 15W		

SKU	7644
Body	Black+Silver



NEW



4MP VIDEO DOORBELL

Smart Ai Human Detect

Sensor type	1/3" Progressive Scan CMOS
Pixels	4 MP
Memory Storage	Micro SD Card (Max 256GB)
Power Supply	5V/1A USB Type-C Interface
Battery specification	3.7V 4500mAh 16.65Wh
USB Port	5V/1A Type-C interface

SKU	245
Body	White



WIRELESS CHARGER 3in1

For Phone / Pods / Watch

Apple Iphone / AirPods / iWatch
Samsung Phone /Buds / Watch
Compact Design



	For iPhone	For Android
SKU	9500	9501

3in1 MULTIFUNCTION DESK LAMP

Wireless Charging



SKU	9512
-----	------

CHARGING STAND 6in1

Match multiple devices

For Phones , iWatch , AirPods



	Black	White
SKU	9502	9503

WIRELESS CHARGER PAD

Qi Standard

Input:	DC5V 2A
Output	DC 9V 1.2A
Length	1m



	Black	White
SKU	9508	9509

WIRELESS CHARGING CLOCK

Supports iOS and Android



Date 12H/24H Alarm Clock Temperature USB



SKU	9514
-----	------

CAR WIRELESS CHARGER STAND

10W Max Power



	Gold	Silver
SKU	9506	9507

SOLAR BLUETOOTH SPEAKER + LIGHT

Solar Panel Power: 5V / 3.5W

Lumens:	380lm
Battery:	DC 3.7V 6A
Light Color	3000K-6000K CCT
IP Rating:	IP44



SKU	228	224	223
Color	Black	Camouflage	Yellow



CCT SELFIE RING LIGHT

10W 5V USB - Dimmable

Watts:	10W
Input Voltage:	5V USB
Flux:	800lm
Beam Angle:	120°
Dimmable:	Yes
IP Rating:	IP20

SKU	9515
-----	------

WORLD ADAPTER

All Standards

Socket :	UK, EU, AU
IP Rating:	IP20

SKU	9513
-----	------

TRANSMITTER 12V NEW

Car Charger Power Outlet (Lighter)	
PD USB-C	36W-5V/3A ; 9V/3A ; 12V 3A
QC3.0 USB-A	18W-5V/3A ; 9V/2A; 12V/1.5A
Handsfree	Yes



SKU 9544

CAR CHARGER 12V NEW

Power Outlet (Lighter)	
Input:	DC 12-24V
PD USB-C	30W
QC3.0 USB-A	18W



SKU 9545

WIRELESS POWER BANK NEW

10000 mAh 5V Type -C	
Input:USB-C	5V/3A ; 9V/2A
Output:USB-C	5V/3A ; 9V/2.22A ; 12V 1.67A
Wireless:	5V/1A ; 7.5V/1A ; 9V/1.67A



SKU 7696

CAR AIR PURIFIER NEW

SMART TOUCH	
Battery	1000mAh
Noise Level	<52db
Power	2.5W



SKU 9542 Filter 9543

4in1 SUPER CHARGE 12V NEW

Car Charger Power Outlet (Lighter)	
PD , USB-C	30W and 5V/3A
Lighting	5V/2.4A
QC3.0 USB-A	5V/2.4A



SKU 9546

WIRELESS ADAPTER NEW

Mini Wireless Carplay/Android Auto Adapter	
USB-A	5V
IP Rating	Ip20



SKU 9532

PORTABLE AIR COMPRESSOR NEW

USB Charging Cable - Digital Display	
Battery	7800mAh 28.86Wh
Voltage	DC 5V/2A (USB Type C)
Pressure	0-150PSI



SKU 9534     

JUMP STARTER & INFLATOR NEW

Power Outlet (Lighter)	
Battery	10000mAh 37Wh
Voltage	DC 5V/2A (USB Type C)
Car Start	EC5 12/600A



SKU 9535     

DVR CAR DASH CAM NEW

DVR+REAR Camera 1080P	
LCD resolution	640x360
Video resolution	3840x2160
Power input:	12V converted to 5V 2A
Wi-Fi / GPS:	Supported
Storage card	up to 256GB



SKU 9533

CAR CHARGER 12V NEW

Magnetic Wireless Charger	
Input	9V/2A
Power	5W/7.5W/10W/15W



SKU 9541



QUICK CHARGER PD

36W Max Power

Power:	36W Max
Outlets:	3 USB-A , 1 USB-C
Input:	AC100-240V 50Hz



	Black	White
SKU	9510	9511

QUICK CHARGER PD

65W Max Power

Power:	65W Max
Outlets:	2 USB-C , 1 USB-A
Input:	AC100-240V 50Hz



SKU	9531
-----	------

USB - HUB TYPE A

4 USB Ports

Input	USB-A 3.0
Output	USB-A 3.0
Size	100x45x18mm
Cable	165mm



SKU	9525
-----	------

USB - HUB TYPE C

4 USB Ports

Input	USB-A 3.0
Output	USB-A 3.0
Size	100x45x18mm
Cable	165mm



SKU	9526
-----	------

TYPE-C to TYPE-C

Cable 3A

Length	1m
--------	----



SKU	9519
-----	------

TYPE-C to TYPE-C

Cable 6A

Length	1m
--------	----



SKU	9520
-----	------

USB-HUB TYPE C

5 in 1

Input	RJ45, 2x USB 3.0, HDMI 2.0 (4K 60Hz), PD in
Output	USB-C
Size	113x43x14mm
Material	Aluminium



SKU	9521
-----	------

USB-HUB TYPE C

4 in 1

Input	RJ45, USB 3.0, HDMI 1.4 (4K 30Hz), PD in
Output	USB-C
Size	85x46x15mm
Material	Aluminium



SKU	9522
-----	------

BLUETOOTH FM TRANSMITTER

Car Charger with MP3 Player

Input:	DC12-24V
Output	DC 5V
FM Transmit:	FM87.5MHz-108.0MHz
Outlets:	2 USB-A / 3.5A(max)



SKU	9504
-----	------

MAGNETIC USB CABLE 3in1

3 Heads - Type C , Micro USB , Apple

Length	1m
--------	----



SKU	9516
-----	------

NETWORK ADAPTER

LAN to USB-A

Input	RJ45
Output	USB-A
Size	57x28x15mm
Transfer rate	1000 Mbits/s



SKU	9523
-----	------

NETWORK ADAPTER

LAN to USB-C

Input	RJ45
Output	USB-C
Size	57x28x15mm
Transfer rate	1000 Mbits/s



SKU	9524
-----	------



POWER BANK - WATERPROOF
10000 mAh

Battery: 10000mAh
Rated Power: 37Wh/3.7V
Input Micro: 5V/2A
Input Type-C: 5V/3A
Size: 159x78x19.5mm

Output: USB1/2 t: 5V/3A
Type-C : 5V/3A
Solar Panel: 1.2W
Flashlight: 2W LED

SKU	7691
Color	Black



POWER BANK - WATERPROOF
20000 mAh

Battery: 20000mAh
Rated Power: 74Wh/3.7V
Input Micro: 5V/2A
Input Type-C: 5V/3A
Size: 167x86x33.5mm

Output: USB1/2 t: 5V/3A
Type-C : 5V/3A
Solar Panel: 1.2W
Flashlight: 4W LED

SKU	7692
Color	Black



POWER BANK
10000 mAh

Battery: 10000mAh
Rated Power: 37Wh/3.7V
Input Micro: 5V/2A|9V/2A|12V/1.5A
Input Type-C: 5V/3A|9V/2A|12V/1.5A

Output: USBA 4.5V/5A|5V/4A|9V/2A
Type-C 5V/3A|9V/2A|12V/1.5A
Size: 140x69x15.5mm

SKU	7694	7693
Color	Black	White



POWER BANK
20000 mAh

Battery: 20000mAh
Rated Power: 74Wh/3.7V
Input Micro: 5V/2A|9V/2A|12V/1.5A
Input Type-C: 5V/3A|9V/2A|12V/1.5A

Output: USBA 4.5V/5A|5V/4A|9V/2A
Type-C 5V/3A|9V/2A|12V/1.5A
Size: 145x69x27.5mm

SKU	7695
Color	Black




SMART CAMERA ROBOTIC VACCUM CLEANER
Gyroscope Navigation



SKU 752





ANTI-DROP SENSOR

Keep machine safety away from stairs



ANTI-COLLISION SENSORS

Effective protect machine and furniture



SMART GYRO ROBOTIC VACCUM CLEANER
Gyroscope Navigation Multiple Cleaning Modes



SKU 753






ROADROVER WHEELS

Climbing ability reach 2cm. With cross-country wheel. Easy to crossing the obstacle.




10 PAIRS OF INFRARED ANTI-COLISION SENSORS



AUTO CLEANING ROBOTIC VACUUM CLEANER
10W 5V USB - Dimmable



SKU 754



STRONS SUCTION


Up to 1000PA no dust can hide from it





VARIOUS GROUND TYPE APPLICATION

Suitable for various floor tyre low pile carpet,tile, wood floor,etc.





SMART CAMERA BULB

WiFi E27

Video resolution: HD
Frame rate: 25fps
View angle: 360 degrees (Horizontal)
90 degrees (Vertical)
Motion detection: About 5 meters
Night vision: About 5 meters
Max memory: Up to 128Gb (Not Include)
App: JXLCAM

SKU

227

SKU

733



AIR PURIFIER - 7 STAGE + HUMIDIFIER

Air Purification + Humidifier + UV Lamp + Ionizer + WiFi

CADR(PM2.5): 450m3/h
Power: 85W
Area: 50m2
Size: 400x230x620mm
Purification: Pre-filter, Cold-catalyst, Formaldehyde removal filter(Honeycomb activated carbon filter Optional),Antibacterial filter, UV Sterilization, HEPA filter, Anion release.



SMART CAMERA BULB

WiFi

Video resolution: HD
Frame rate: 25fps
View angle: 360 degrees (Horizontal)
90 degrees (Vertical)
Motion detection: About 5 meters
Night vision: About 5 meters
Max memory: Up to 128Gb (Not Include)
App: JXLCAM

SKU

244

SKU

732



AIR PURIFIER - 6 STAGE + HUMIDIFIER

Air Purification + Humidifier + UV Lamp + Ionizer

CADR(PM2.5): 300m3/h
Power: 65W
Area: 38m2
Size: 360x195x565mm
Purification: Cold-catalyst, Formaldehyde removal filter (Honeycomb activated carbon filter Optional),Antibacterial filter, UV Sterilization, HEPA filter,Anion release.



WINDOW CLEANING ROBOT

+

Cleaning speed: 2minutes /m2
Power: 80W
Size: 300x150x120m
Cleaning Modes: 3 modes

SKU

757

SKU

731



AIR PURIFIER - 6 STAGE

Air Purification UV Lamp + Ionizer

CADR(PM2.5): 150m3/h
Power: 43W
Area: 30m2
Size: 330x180x525mm
Purification: Cold-catalyst, Formaldehyde removal filter (Honeycomb activated carbon filter Optional),Antibacterial filter, UV Sterilization, HEPA filter,Anion release



WINDOW CLEANING ROBOT

+

Cleaning speed: 2minutes /m2
Power: 80W
Size: 250x250x9.5m
Cleaning Modes: 3 modes
USP: 20min

SKU

758

SKU


734



AIR PURIFIER - 7 STAGE

Air Purification UV Lamp + Ionizer

CADR(PM2.5): 320m3/h
Power: 80W
Area: 40m2
Size: 370x195x605mm
Purification: Pre-filter, Cold-catalyst, Formaldehyde removal filter(Honeycomb activated carbon filter Optional),Antibacterial filter, UV Sterilization, HEPA filter,Anion release.





PORTABLE PARTY SPEAKER

Bluetooth 2x8.0 inch

Output Power:

Version BT :

Function:

USB MP3 Player:

Remote Control:

Woofer :

Channel :

Signal to noise ratio :

MIC input:

AUX 3.5mm Input:

USB charging :

Charging Time :

Playtime :

Battery capacity :

Size :

20W RMS / 400W P.M.P.O

V5.0+EDR

BT/FM/USB/TF/AUX/MIC IN/TWS

YES

YES

8"*2

Stereo

≥80dB

YES

YES

DC 5V

5-6 Hours

2-4 Hours

2400mAh

250x245x615mm

SKU

9551



PORTABLE PARTY SPEAKER

Bluetooth 2x3.0 inch

Output Power:

Version BT :

Function:

Woofer :

Signal to noise ratio :

5 Lighting Modes :

USB MP3 Player :

USB charging :

Charging Time :

Playtime :

Battery capacity :

Size :

2x6W RMS / 150W P.M.P.O

V5.0

BT/FM/USB/TWS

3"*2

≥80dB

YES

YES

DC 5V

5-6 Hours

2-4 Hours

1200mAh

128x128x280mm

SKU

9554



PORTABLE PARTY SPEAKER

Bluetooth 15 inch

Output Power:

Version BT :

Function:

USB MP3 Player:

Remote Control:

Woofer :

Channel :

Signal to noise ratio :

MIC input:

AUX 3.5mm Input:

USB charging :

Charging Time :

Playtime :

Battery capacity :

Size :

2x20W RMS / 800W P.M.P.O

V5.0+EDR

BT/FM/USB/TF/AUX/MIC IN/TWS

YES

YES

15"

Stereo

≥80dB

YES

YES

DC 9V

5-6 Hours


2-4 Hours

7.4V 3000mAh

420x330x610mm

SKU

9552

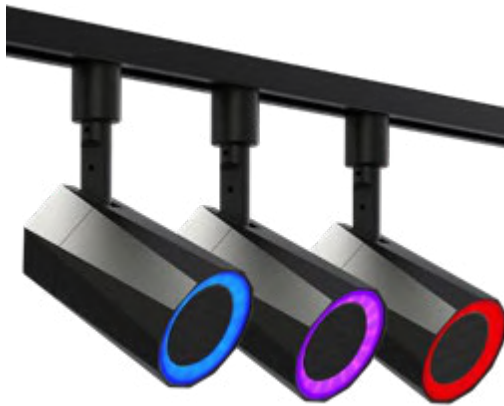

LED RGB TRACK LIGHT SPEAKER

Bluetooth - Remote Control

Bluetooth:

Working Distance:

Transmission Power:

IP Rating

Driver Specifaition:

Peak power:

Material:

Boby Color:

On/Off Cycle

Frequency response

Life Span

S/N Span

Working Voltage

5.4

10m

4dbm

IP20

φ52mm 6W RMS

11W

Plastic

Black

25000x

50Hz-20kHz

25 000H

>75db

AC90-245V

For 4-Line Tracks

SKU

15107



PORTABLE PARTY SPEAKER

Bluetooth 2x8.0 inch

Output Power:

Version BT :

Function:

USB MP3 Player:

Remote Control:

Woofer :

Channel :

Signal to noise ratio :

MIC input:

AUX 3.5mm Input:

USB charging :

Charging Time :

Playtime :

Battery capacity :

Size :

2x20W RMS / 800W P.M.P.O

V5.0+EDR

BT/FM/USB/TF/AUX/MIC IN/TWS

YES

YES

8"*2

Stereo

≥80dB

YES - 2 Pcs

YES

DC 9V

5-6 Hours

2-4 Hours


7.4V 3600mAh

315x277x667mm

SKU

9553



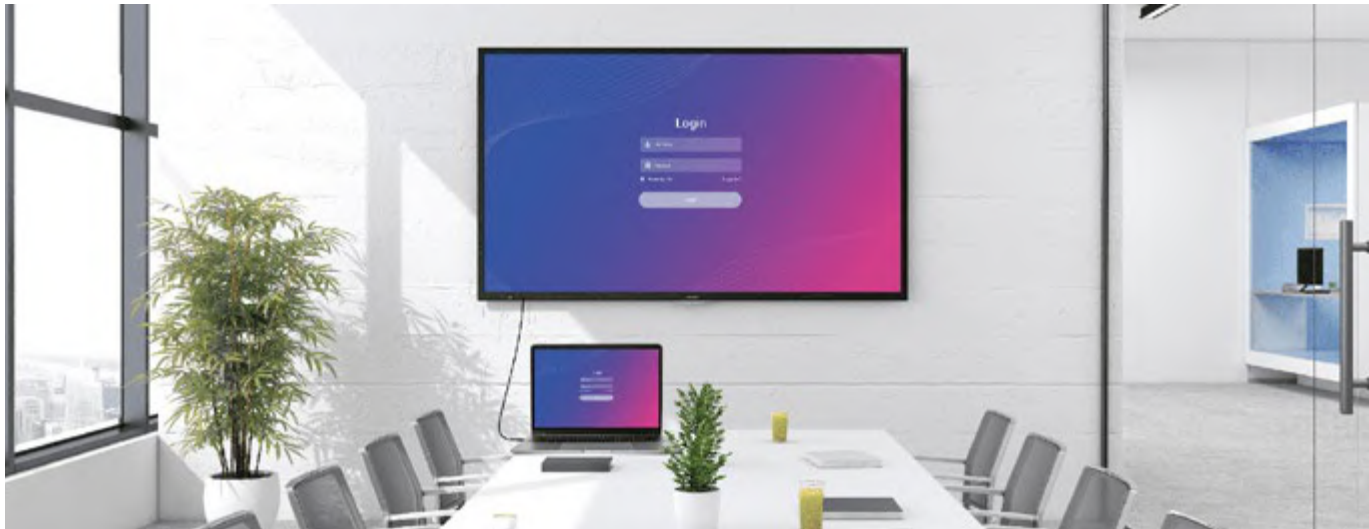

WHITE BOARD - Touch Pen and Remote

Interactive Displays 65" / 86"

Display resolution	4K 60Hz ULTRA HD 3840×2160
Operating System	Android
Display	65" 86"
Port Type	HDMI / USB / LAN
Wi - Fi	YES
Brightness	350cd/m2
Speakers	8Ω 12W×2
Contrast (Typ)	1200:1
Color gamut NTSC	72%



	65" Inch	86" Inch	Floor stand	Wall mounted
SKU	10673	10674	10675	10676



ANDROID TOUCH SCREEN

43" Floor Stand / 43" K-Shape

Display resolution	2K QUAD HD
Operating System	Android
Display	42"
Port Type	HDMI / DP / USB / LAN
Wi - Fi	YES
Touch points	10 points touch
Brightness	450cd/m2
Speakers	8Ω 5W×2



	Floor Stand	K-Shape
SKU	10671	10672



[illegible]

SKU	Page №	SKU	Page №	SKU	Page №	SKU	Page №	SKU	Page №	SKU	Page №	SKU	Page №	SKU	Page №	SKU	Page №	SKU	Page №	SKU	Page №	SKU	Page №	SKU	Page №	SKU	Page №
4960	231	5057	415	5153	306	5261	330	5352	328	5459	357	5598	136	5985	345	6192	269	6317	294	6511	359	6616	251	6733	142	7408	388
4961	231	5058	415	5154	306	5262	330	5353	328	5460	355	5599	136	5986	345	6193	269	6318	294	6512	359	6617	250	6734	142	7409	388
4962	232	5059	306	5155	306	5263	332	5354	341	5461	355	5601	139	5987	345	6201	263	6319	294	6517	250	6618	251	6735	142	7410	388
4963	232	5060	299	5156	306	5264	332	5355	341	5462	355	5602	139	5991	347	6202	263	6320	294	6531	233	6619	251	6736	142	7411	388
4964	232	5061	299	5157	306	5265	330	5356	341	5464	358	5603	139	5992	347	6203	263	6321	287	6532	233	6620	251	6737	142	7412	388
4965	232	5062	299	5158	306	5266	330	5357	341	5468	357	5604	139	5993	347	6206	263	6322	287	6533	233	6621	251	6738	142	7413	407
4966	232	5063	299	5159	306	5267	331	5358	328	5470	299	5605	139	6009	179	6207	263	6326	293	6534	233	6622	233	6739	142	7414	397
4968	229	5064	299	5160	306	5268	331	5359	341	5471	299	5606	139	6019	164	6208	263	6328	293	6535	233	6623	233	6740	142	7415	397
4974	228	5065	299	5162	256	5269	331	5360	328	5472	299	5607	139	6021	164	6211	262	6329	295	6536	233	6624	233	6741	142	7422	389
4975	228	5066	299	5165	257	5270	331	5361	328	5473	357	5608	139	6022	164	6212	262	6330	289	6537	233	6627	242	6742	142	7423	389
4976	228	5067	299	5166	257	5271	332	5362	328	5474	357	5609	139	6025	179	6213	262	6331	270	6538	233	6628	147	6745	140	7424	398
4981	228	5068	299	5170	82	5272	332	5363	328	5475	357	5627	140	6026	179	6214	262	6332	270	6539	231	6629	147	6746	140	7425	398
4982	228	5069	306	5171	82	5274	330	5364	329	5478	301	5628	140	6027	179	6221	262	6333	270	6540	231	6630	147	6747	140	7426	398
4983	228	5070	82	5172	82	5275	330	5365	329	5479	301	5631	140	6028	164	6222	262	6335	274	6541	270	6631	242	6748	140	7427	398
4984	228	5071	82	5175	252	5276	330	5366	329	5480	338	5701	350	6029	163	6223	262	6336	275	6542	270	6632	242	6749	140	7428	398
4985	228	5072	82	5180	209	5278	330	5367	329	5481	338	5702	350	6030	165	6224	262	6337	275	6543	242	6633	242	6750	140	7429	398
4986	228	5073	83	5181	209	5279	331	5368	329	5482	338	5703	350	6031	164	6231	263	6338	275	6544	242	6634	245	7131	381	7431	393
4987	228	5074	83	5182	165	5280	331	5369	329	5483	338	5704	350	6032	164	6232	263	6339	275	6545	242	6635	245	7132	381	7432	393
4988	228	5075	83	5183	252	5281	332	5370	341	5484	338	5705	350	6035	164	6233	263	6340	274	6546	241	6636	245	7133	381	7433	393
4989	228	5076	83	5184	252	5282	332	5373	331	5485	338	5706	350	6036	164	6235	261	6341	274	6548	241	6637	245	7134	381	7434	392
4990	229	5077	83	5185	252	5283	330	5378	334	5486	338	5707	350	6037	164	6236	261	6342	284	6549	250	6638	245	7135	381	7435	392
4991	229	5078	83	5188	165	5284	330	5379	334	5487	338	5708	350	6038	164	6237	261	6343	285	6550	250	6639	245	7136	381	7436	392
4992	229	5081	80	5190	252	5285	330	5380	299	5488	338	5709	350	6039	164	6238	261	6344	277	6551	250	6640	245	7141	380	7437	393
4993	229	5082	80	5191	252	5286	330	5381	299	5489	338	5710	350	6040	424	6239	261	6345	274	6552	250	6641	359	7142	380	7438	393
4994	229	5083	80	5192	255	5287	331	5382	299	5490	339	5711	350	6041	424	6240	261	6346	274	6553	250	6642	359	7143	380	7439	393
4995	229	5084	80	5193	255	5288	331	5383	300	5491	339	5712	350	6042	424	6241	263	6347	274	6554	250	6643	359	7144	271	7440	392
4996	229	5085	80	5194	253	5289	332	5384	300	5492	339	5713	350	6043	164	6242	263	6348	272	6555	250	6644	359	7145	271	7441	392
4997	229	5086	80	5197	165	5290	332	5385	300	5493	339	5714	350	6044	164	6243	263	6349	272	6556	250	6645	359	7201	152	7442	392
4998	229	5087	80	5198	165	5291	356	5386	300	5494	339	5715	350	6101	267	6245	261	6350	273	6557	250	6646	359	7202	152	7443	392
4999	239	5088	80	5199	165	5292	356	5387	300	5495	339	5721	350	6102	267	6246	261	6351	279	6558	250	6647	359	7203	150	7444	392
5001	252	5089	80	5201	336	5293	356	5388	300	5496	339	5722	350	6103	267	6247	261	6352	287	6559	250	6648	359	7204	151	7445	392
5002	252	5090	415	5202	336	5294	356	5389	309	5497	339	5723	350	6104	265	6248	261	6353	287	6560	250	6650	141	7205	151	7446	393
5003	179	5091	415	5203	336	5295	356	5390	309	5498	339	5724	350	6105	265	6249	261	6354	288	6561	250	6651	141	7206	150	7447	393
5004	179	5092	415	5204	336	5296	356	5391	330	5499	339	5725	350	6106	265	6250	261	6355	288	6562	250	6652	141	7207	152	7448	393
5005	179	5093	415	5205	336	5297	356	5392	330	5501	136	5726	350	6108	265	6251	264	6356	289	6563	250	6653	141	7208	153	7449	393
5006	179	5094	415	5206	336	5298	356	5393	331	5502	136	5727	350	6109	265	6252	264	6357	278	6564	250	6654	141	7209	153	7450	393
5007	307	5095	415	5207	336	5303	345	5394	331	5503	136	5728	350	6110	268	6253	264	6358	278	6565	250	6655	141	7210	153	7451	384
5008	307	5096	415	5208	336	5304	345	5395	332	5504	136	5729	350	6111	268	6254	264	6359	273	6566	250	6671	145	7211	153	7452	384
5009	307	5097	82	5209	336	5305	345	5396	332	5505	136	5730	350	6112	268	6255	268	6361	278	6568	239	6672	145	7221	151	7453	384
5010	307	5098	82	5210	341	5306	345	5397	332	5506	136	5731	350	6113	268	6256	268	6362	278	6570	251	6673	145	7222	151	7454	384
5011	307	5099	82	5211	341	5311	335	5398	331	5507	136	5732	350	6114	265	6261	264	6363	290	6571	251	6674	145	7223	150	7455	384
5012	307	5100	253	5212	341	5312	335	5399	331	5508	136	5733	350	6117	265	6262	264	6364	285	6572	251	6675	145	7224	150	7456	384
5013	307	5101	253	5213	341	5313	335	5400	333	5509	136	5734	350	6119	267	6263	264	6365	288	6573	249	6676	145	7225	152	7457	384
5014	307	5102	253	5214	336	5314	335	5401	352	5538	136	5735	350	6120	267	6264	264	6366	285	6574	249	6677	145	7226	152	7458	384
5015	307	5103	253	5215	336	5315	334	5402	352	5539	136	5736	350	6121	265	6265	260	6367	285	6575	249	6678	145	7227	153	7459	384
5016	307	5104	255	5216	340	5316	334	5403	353	5540	136	5737	350	6124	265	6266	260	6368	273	6576	249	6679	145	7301	419	7460	384
5017	307	5105	255	5217	340	5317	335	5404	353	5550	137	5738	350	6131	266	6267	260	6369	286	6577	233	6680	145	7302	419	7461	384
5018	307	5106	255	5218	336	5318	335	5405	353	5551	137	5739	350	6132	266	6268	260	6370	288	6578	229	6681	145	7303	418	7462	384
5019	307	5107	252	5219	336	5319	333	5408	328	5552	137	5751	353	6133	266	6271	262	6371	286	6581	243	6682	358	7304	421	7463	384
5020	307	5108	255	5220	336	5320	333	5409	329	5554	137	5752	353	6134	266	6272	262	6372	286	6582	270	6683	358	7305	417	7464	384
5021	307	5109	255	5221	337	5321	309	5411	328	5555	137	5753	353														

SKU	Page №	SKU	Page №	SKU	Page №	SKU	Page №	SKU	Page №	SKU	Page №	SKU	Page №	SKU	Page №	SKU	Page №	SKU	Page №	SKU	Page №	SKU	Page №	SKU	Page №
7495	386	7601	422	8240	373	9099	100	9270	365	9436	20	9541	430	9755	18	11897	64	12818	186	12950	174	15316	314	15411	318
7496	386	7602	422	8241	373	9117	369	9271	377	9437	22	9542	431	9756	21	11898	64	12819	187	12951	174	15317	314	15412	318
7497	386	7603	422	8242	373	9118	369	9272	377	9442	18	9543	431	9757	21	12001	210	12820	187	12952	174	15318	314	15413	318
7498	386	7604	422	8243	373	9119	369	9273	377	9443	18	9544	430	9758	22	12002	210	12821	194	12953	174	15319	314	15414	318
7499	381	7605	422	8244	373	9126	363	9276	362	9444	19	9545	430	9759	21	12003	210	12822	194	12954	174	15320	314	15415	318
7501	391	7606	422	8245	373	9127	363	9277	362	9445	20	9546	430	9760	22	12004	210	12823	194	12955	174	15321	314	15416	318
7502	391	7607	422	8246	373	9128	363	9278	362	9447	22	9551	438	9761	18	12005	210	12824	197	12956	174	15322	314	15417	318
7503	382	7608	422	8247	373	9141	363	9279	362	9448	18	9552	438	9762	19	12006	210	12825	197	12957	174	15323	314	15418	318
7504	382	7609	422	8248	372	9142	363	9281	362	9449	18	9553	438	9765	19	12007	210	12826	196	12958	174	15324	314	15419	319
7505	382	7610	422	8249	372	9143	363	9282	362	9450	19	9554	439	9766	19	12008	210	12827	196	12959	174	15325	314	15420	319
7506	382	7611	422	8250	372	9145	364	9283	362	9451	15	9601	38	9767	31	12009	214	12828	196	12960	174	15326	315	15421	319
7507	382	7612	422	8251	376	9146	364	9291	364	9452	15	9602	38	9768	31	12021	210	12829	198	12961	175	15327	315	15422	319
7508	382	7613	423	8252	376	9147	364	9292	364	9453	15	9603	38	9769	31	12022	210	12830	198	12962	175	15328	315	15423	319
7509	382	7614	423	8253	376	9157	368	9293	364	9454	15	9604	38	9770	31	12023	210	12831	195	12963	175	15329	315	15424	319
7510	382	7615	422	8254	376	9171	369	9294	364	9455	15	9605	38	9776	28	12024	210	12832	195	12964	175	15330	315	15425	317
7511	382	7616	422	8255	376	9172	369	9295	364	9456	15	9606	39	9777	28	12025	211	12833	195	12965	175	15331	315	15426	317
7512	382	7617	423	8256	376	9173	369	9301	400	9457	15	9607	39	9781	24	12026	211	12834	197	12966	175	15332	315	15427	319
7513	382	7618	423	8257	376	9175	377	9302	400	9458	15	9608	39	9785	30	12027	211	12841	182	12967	175	15333	315	15428	319
7514	382	7621	424	8258	376	9176	377	9303	400	9459	15	9609	38	9786	30	12028	211	12842	182	12968	175	15334	315	15429	320
7515	382	7622	424	8261	374	9177	377	9304	400	9460	33	9610	38	9787	30	12029	211	12843	182	13201	214	15335	314	15430	320
7516	382	7623	423	8262	374	9178	377	9305	401	9461	33	9611	38	9788	30	12030	211	12844	182	13202	214	15336	314	15431	320
7517	382	7624	423	8263	374	9180	368	9306	401	9462	33	9612	38	9789	30	12031	211	12845	183	13203	214	15337	314	15432	320
7518	382	7625	423	8264	374	9181	368	9307	400	9463	33	9613	38	9790	34	12032	211	12846	183	13204	214	15338	314	15433	320
7519	382	7626	423	8265	374	9182	368	9308	400	9464	35	9614	38	9791	27	12033	211	12851	182	13591	321	15339	314	15434	320
7520	382	7631	424	8591	243	9189	367	9309	401	9465	31	9615	38	9792	27	12034	211	12852	182	15002	218	15340	314	15435	320
7522	383	7632	424	9027	100	9190	367	9310	401	9468	31	9616	38	9794	29	12035	211	12853	182	15101	308	15341	314	15436	320
7523	383	7633	424	9028	101	9192	367	9311	401	9469	31	9617	38	9795	29	12036	211	12854	183	15102	308	15342	314	15437	327
7524	383	7634	424	9029	101	9194	367	9312	401	9470	31	9618	38	9796	34	12037	204	12855	184	15103	308	15343	314	15438	327
7525	383	7635	424	9041	133	9195	367	9315	401	9474	30	9619	38	9797	34	12038	204	12856	184	15104	308	15344	314	15439	327
7526	389	7636	424	9042	133	9196	367	9316	401	9478	28	9620	38	9798	34	12039	204	12857	184	15105	308	15345	314	15440	327
7527	389	7637	424	9043	133	9197	367	9321	407	9479	28	9621	38	9799	33	12040	204	12858	185	15106	308	15346	314	15441	327
7528	386	7641	425	9044	133	9198	367	9322	407	9481	23	9622	39	9801	6	12041	204	12859	185	15107	439	15347	314	15442	327
7529	386	7642	425	9045	133	9199	367	9323	407	9482	23	9623	38	9802	6	12042	204	12860	185	15111	256	15348	314	15443	326
7530	386	7643	425	9046	101	9201	371	9324	407	9483	23	9624	39	9803	6	12043	204	12861	187	15112	256	15349	314	15444	326
7531	386	7644	427	9047	101	9202	371	9331	405	9484	23	9625	39	9821	8	12044	204	12862	187	15113	253	15361	323	15445	326
7532	387	7651	294	9048	101	9203	371	9332	405	9485	23	9626	39	9822	8	12045	212	12880	90	15114	253	15362	323	15446	326
7533	387	7652	294	9049	101	9210	371	9333	405	9486	23	9627	39	9823	8	12046	212	12881	90	15115	257	15363	323	15447	326
7534	387	7653	294	9050	99	9212	371	9334	405	9487	32	9628	39	9851	10	12047	212	12882	90	15116	257	15364	323	15448	326
7535	387	7654	294	9051	99	9213	371	9335	405	9489	25	9629	38	9852	10	12048	212	12883	89	15117	257	15365	323	15449	326
7536	390	7655	294	9052	99	9216	371	9336	405	9490	25	9630	38	9853	10	12051	396	12884	89	15118	257	15366	323	15450	326
7537	390	7656	294	9053	99	9217	371	9337	405	9491	26	9631	39	9854	10	12052	396	12885	89	15119	257	15367	322	15451	326
7538	390	7691	434	9054	99	9218	371	9338	405	9492	26	9632	38	9855	10	12053	396	12886	88	15120	253	15368	322	15452	326
7541	402	7692	434	9055	99	9221	371	9339	405	9493	26	9633	38	9856	10	12054	396	12887	88	15121	253	15369	322	15454	327
7542	402	7693	434	9056	99	9222	371	9340	404	9494	26	9634	38	9898	36	12055	396	12888	97	15122	257	15370	322	15455	327
7543	402	7694	434	9057	99	9223	371	9341	404	9496	24	9635	38	9899	36	12056	396	12889	97	15123	257	15371	316	15456	327
7547	383	7695	434	9058	98	9224	371	9342	404	9497	36	9636	39			12057	396	12890	97	15124	254	15372	316	15457	327
7548	383	7696	431	9059	98	9225	365	9343	404	9498	36	9637	39			12058	396	12891	97	15125	254	15373	316	15459	327
7549	383	8151	376	9060	100	9226	365	9344	404	9499	35	9638	39			12601	175	12892	96	15126	254	15374	316	15460	327
7550	383	8152	376	9061	100	9227	365	9345	403	9500	428	9639	39			12602	175	12893	96	15127	254	15375	316	15461	327
7551	119	8153	376	9062	98	9228	365	9346	404	9501	428	9640	39			12603	175	12894	96	15128	254	15376	316	15462	327
7552	119	8154	376	9063	98	9229	365	9347	403	9502	428	9641	39			12604	175	12895	96	15129	254	15377	316	15463	327
7553	119	8155	376	9064	98	9231	370	9348	404	9503	428	9642	39			11301	63	12896	96	15130	257	15378	316	15464	327
7554	119	8156	376	9065	98	9232	370	9349	403	9504	432	9643	39			11302	63	12897	96	15131	257	15379	323	15466	327
7555	383	8157	376	9066	98	9233	370	9350	403	9505	425	9644	39			11303	63	12898	96	15132	257	15380	317	15467	327
7556	383	8158	376	9067	98																				

SKU	Page №	SKU	Page №	SKU	Page №	SKU	Page №	SKU	Page №
15494	354	15861	346	16704	143	19007	189	19119	107
15495	354	15862	346	16705	143	19008	189	19120	107
15498	327	15863	346	16706	143	19009	189	19122	107
15511	138	15864	346	16707	143	19010	190	19123	107
15512	138	15865	346	16708	143	19011	190	19124	106
15513	138	15866	346	16709	143	19012	191	19125	104
15514	138	15867	346	16710	143	19013	191	19126	104
15515	138	15868	346	16711	143	19014	192	19127	104
15516	138	15869	346	16712	143	19015	191	19128	104
15517	138	15870	346	16713	143	19016	190	32070	216
15518	138	15871	346	16714	143	19031	117	65315	299
15519	138	15872	346	16721	141	19032	117	65316	301
15541	138	15873	346	16722	141	19033	117	65317	147
15542	138	15874	346	16723	141	19034	115	15118S	257
15544	138	15875	346	16724	141	19035	115	9468C	31
15545	138	15876	346	16725	141	19036	115	9487-B	32
15547	138	15877	346	16726	141	19037	110	9499-A	35
15548	138	15878	346	16731	146	19038	112	9499-C	35
15601	139	15879	346	16732	146	19039	114		
15602	139	15880	346	16733	146	19040	114		
15801	348	15881	346	16734	146	19041	112		
15802	348	15882	346	16735	146	19042	116		
15803	348	15883	346	16736	146	19043	116		
15804	348	15884	346	16737	146	19044	116		
15805	348	15885	346	16738	146	19045	111		
15806	348	15886	346	16739	146	19046	114		
15807	348	15887	346	16741	144	19047	110		
15808	348	15888	346	16742	144	19048	110		
15809	348	15889	347	16743	144	19049	117		
15810	348	15890	347	16744	144	19050	117		
15811	348	15891	347	16745	144	19051	111		
15812	348	15892	347	16746	144	19052	112		
15813	348	15893	347	16751	306	19053	192		
15814	348	15894	347	16752	306	19054	123		
15815	348	15895	347	16760	305	19055	123		
15816	348	15896	347	16761	305	19056	123		
15817	348	15897	347	16762	305	19057	123		
15818	348	15898	347	16763	305	19058	118		
15819	348	15901	344	16764	305	19059	118		
15820	348	15902	344	16765	305	19060	118		
15821	348	15903	344	16766	305	19061	118		
15822	348	15904	344	16767	305	19062	118		
15823	348	15905	344	16768	305	19063	193		
15824	348	15906	344	16771	301	19064	111		
15825	348	15907	344	16772	301	19065	109		
15826	348	15908	344	16773	301	19066	113		
15827	348	15909	344	16774	301	19067	117		
15828	348	15910	344	16775	301	19068	117		
15829	348	15911	344	16776	298	19069	113		
15830	348	15912	344	16801	304	19070	192		
15831	348	15913	344	16802	304	19071	113		
15832	348	15914	344	16803	304	19072	193		
15833	348	16101	267	16804	304	19073	193		
15834	348	16102	267	16805	304	19081	102		
15835	348	16103	267	16811	304	19082	102		
15836	348	16104	267	16812	304	19083	102		
15837	349	16105	267	16813	304	19084	102		
15838	349	16106	267	16821	303	19085	102		
15839	349	16107	267	16822	303	19091	59		
15840	349	16108	267	16823	303	19092	59		
15841	349	16111	266	16824	303	19093	59		
15842	349	16112	266	16825	303	19100	106		
15843	349	16113	266	16826	303	19101	108		
15844	349	16114	266	16830	304	19102	105		
15845	349	16115	266	16831	302	19103	105		
15846	349	16301	291	16832	302	19104	108		
15847	349	16302	286	16833	302	19105	108		
15848	349	16303	290	16834	302	19106	108		
15849	349	16304	291	16835	302	19107	108		
15850	349	16305	291	16836	302	19108	103		
15851	349	16306	271	16841	302	19109	103		
15852	349	16307	271	16842	302	19110	103		
15853	349	16308	280	16843	302	19111	105		
15854	349	16309	280	16844	302	19112	105		
15855	349	16310	281	19001	116	19113	105		
15856	349	16311	281	19002	116	19114	105		
15857	349	16312	279	19003	116	19115	107		
15858	349	16701	143	19004	116	19116	107		
15859	346	16702	143	19005	116	19117	106		
15860	346	16703	143	19006	116	19118	107		

Brighter Spaces.
Better Living.



Innovative LED solutions for homes, businesses and professional spaces.



