


OPTONICA

USER MANUAL


Specifications and Technical Data sheet:

Luminaire Category:	BRILLIANT Series LED High bay
Input Voltage:	AC220-240V 50/60Hz
Ambient Temperature:	-40°C<TA<50°C
Surge Protection:	L-N 3KV;L,N-PE 2KV
IP Grade:	IP65
IK Grade:	IK08
Material:	Aluminium alloy & PC Lens

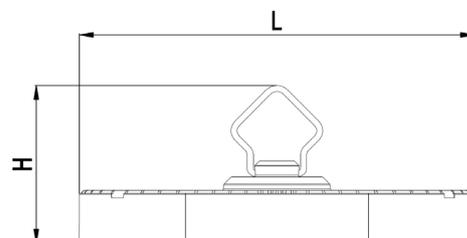

WARNING:





1. ENSURE ELECTRICITY IS SWITCHED OFF BEFORE INSTALL .
2. Please read through all following instructions before installing the unit.
3. User should prepare necessary accessories and spare parts (not provided) including junction box .
4. The high bay light must be earthed.
5. Method of attachment of the cable or cord such that any replacement can only be made by the manufacturer, his service agent or similarly qualified person.



Product Model	Rated CCT	FLUX ±10%	Installation height (M)	Net weight (Kg)	SIZE: (mm) L*W*H
8221 - 100W - 90°	6000/4000K	10000LM	≤10M	1.1	200*200*103
8222 - 100W - 90°	6000/4000K	10000LM	≤10M	1.1	200*200*103
8223 - 150W - 90°	6000/4000K	15000LM	≤12M	1.65	260*260*105
8224 - 150W - 90°	6000/4000K	15000LM	≤12M	1.65	260*260*105
8225 - 200W - 90°	6000/4000K	20000LM	≤14M	2.5	320*320*111
8226 - 200W - 90°	6000/4000K	20000LM	≤14M	2.5	320*320*111

Please operate it strictly according to the instruction.

MOUNTING

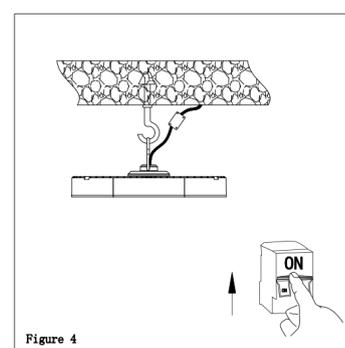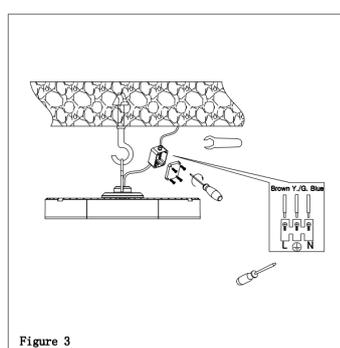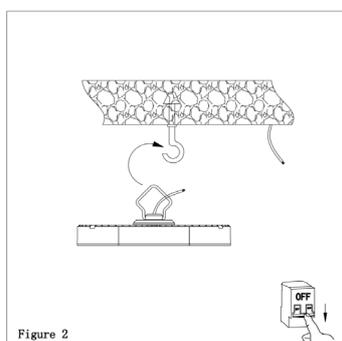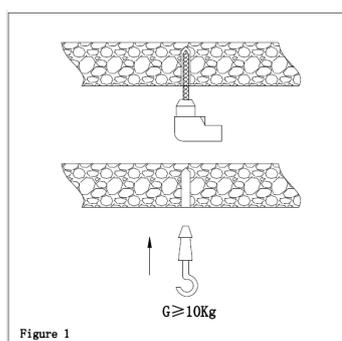

Please don't open our products by yourself, it may causes water leakage.