

Wall Washer SKU:7141




Features:

1. Male and Female solid terminal waterproof connector.
2. Mechanical Waterproof without glue.
3. Cable with screw nut has passed 80 Newton tension that much more over than European standard, which is safer.
4. 180° Adjustable bracket, easy installation way, beautiful and tidy, without any affection of building appearance.
5. Convenient Usage, Outstanding Durability, Integral System, Technical Support


Specifications:

Power Cable :	Every light will leave ONE CABLE 3*1.0mm ² 15cm rubber cable with Male & Female connector (Brown: DC24V+, Blue: DC24V-, Yellow/Green: Data/Signal)
Working Voltage:	DC 24V
Max. Power Consumption:	18W
Light Color:	RGB+3000K
Working Temperature:	-20°C to 50°C
Protection Rating:	IP66
Control system:	SPI (Main Controller ; Slave Controller)

Installation:

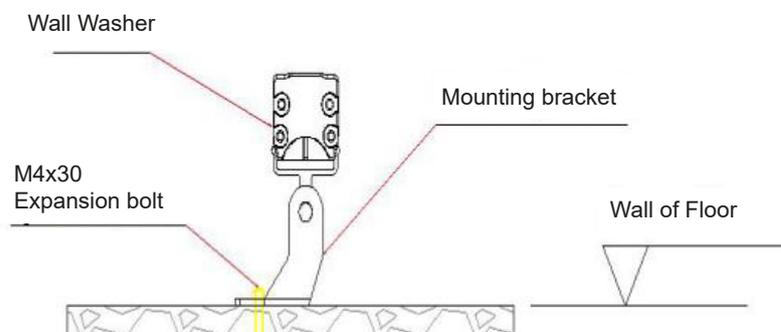

System Diagram:

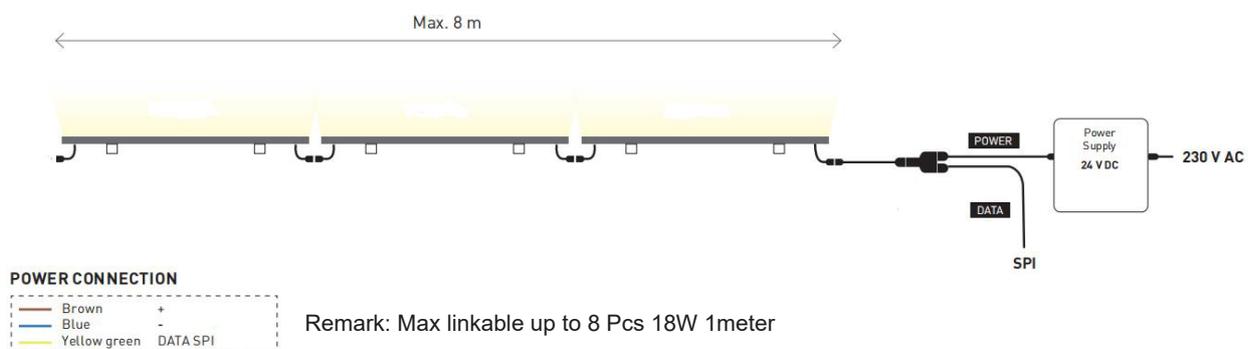

Warnings:

Make sure that the luminaire is installed properly before connecting to electricity.
 Please do not cover the fitting.
 Maintenance and installation should only be carried out by a professional electrician.