


# SPC01 Power Control Box

The SPC01 Power Control Box is designed to realize the function of power limitation or zero-export control in accordance with local grid codes and regulations. It is being used with KSTAR three-phase PV grid-tied inverters (3-125 kW) via RS-485 interface. The built-in smart meter collects the power of the grid-tied side of the PV power station in real time.

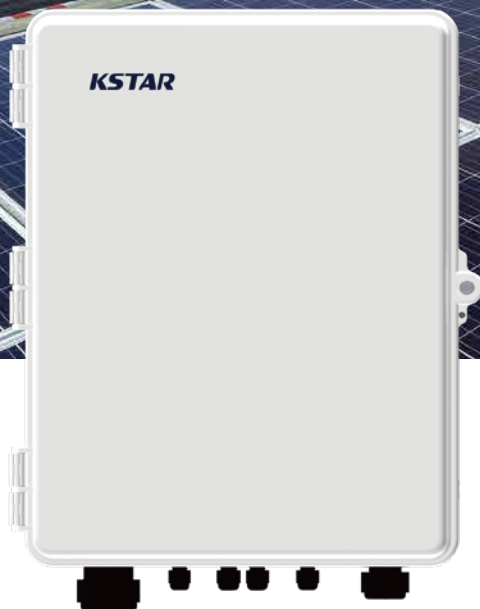

## Powerful

Support number of inverters up to 80  
Long distance of inverter communication up to 1000 m



## Easy to install

Wall/rack-mounted  
IP65 for outdoor installation



## Flexible Connectivity

Support multiple communication modes  
Upload operating data to cloud server in real time



## Strong Adaptability

Zero-export response time < 2s  
Support remote update

Technical Specifications	SPC01
<b>Input</b>	
Rated Input Voltage	230 VAC (L-N) / 400 VAC (L-L)
Input Voltage Range	173 ~ 480 VAC
Gird Connection Type	3W + N + PE
Rated Input Frequency	50 / 60 Hz
Input Frequency Range	45 ~ 65 Hz
Lightning Protection Grade	Grade C
<b>Communication</b>	
Inverter Communication Terminals	RS-485*5
Max. Number of Inverter	80 (Each terminal connects up to 16 inverters)
Max. Distance of Inverter Communication	1000 m
Communication	Ethernet / WiFi / 4G (Optional)
HMI	Bluetooth + Indicator Light
<b>Function</b>	
Communication Failure Shutdown	Yes
Remote Update	Yes
Zero Export	Yes
Zero-export Response Time	2s
Zero-export Control Accuracy	3%
<b>Mechanical Parameter</b>	
Dimensions (W x H x D)	420 × 320 × 132 mm
Weight	5.3 kg
Operation Temperature Range	-25 - + 60°C
Cooling Type	Natural Convection
Max. Operation Altitude	3000 m
Operation Humidity	0 ~ 100% (No Condensation)
IP Class	IP65
Installation	Wall / Rack Mounted

