

OPTONICA

User Manual



1. Soft silicone LED light strip kit.



2. Check all products and accessories.



3. Connect the power supply and the plug.



4. Insert the remote control receiver into the 3-pin socket.



5. Insert the LED light strips into the power supply connectors.



6. Test all functions of the complete lighting set.




7. Fit the product into the panel groove.



8. Mount the remote control receiver at a height of 100 cm above the floor



9. Installation examples.

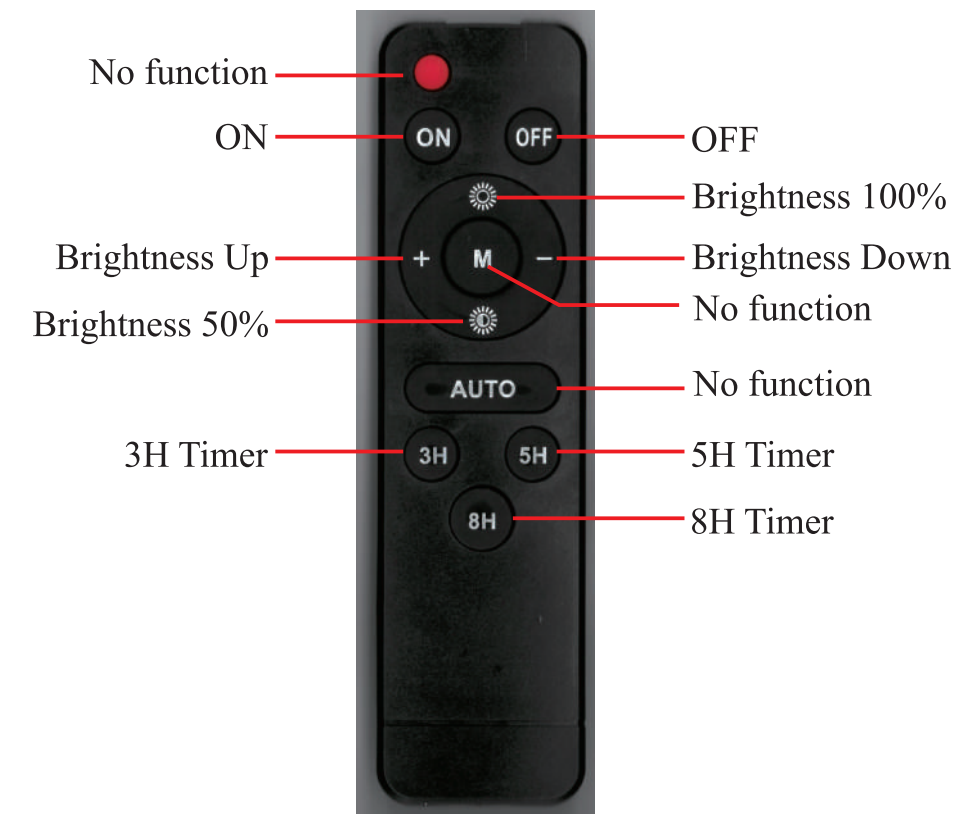

Product Safety Installation Instructions

- 01 – This product can only be installed indoors.
 - 02 – The product must not be installed in humid environments (eg. not suitable for bathrooms etc.).
 - 03 – The product must not be exposed to flammable materials.
 - 04 – The product must not be installed on ceilings made of flammable materials.
 - 05 – The Transformer should only be used with the supplied LED Light Tubes.
 - 06 – During installation, ensure that no screws pierce wires or other hidden objects inside the decorative panel!
 - 07 – Please avoid pinching cables between the product and the mounting surface.
 - 08 – The internal wiring of this product cannot be modified.
 - 09 – The LED Light Tubes must not be fixed using screws or nails during installation.
 - 10 – If the product or its components are damaged or show deformation due to heat, they must be replaced by qualified personnel authorized by the manufacturer, service agent, or similar professionals.
 - 11 – This product has no serviceable parts. When the light source reaches the end of its service life or becomes damaged, the entire lamp should be replaced.
 - 12 – Air must circulate around the transformer, do not cover it.
 - 13 – Although the transformer has extra output sockets, its maximum capacity is 10 metres of LED light tubes (DO NOT INSTALL EXTRA LED LIGHT TUBES)
 - 14 – Periodically inspect the transformer and light tubes for signs of damage. Damaged components should be replaced immediately.
- 2 year warranty - This warranty is limited to the replacement of the defective parts only, improper use or incorrect installation will void the warranty.



The corrosive atmosphere or hazardous materials such as sulfur, chlorine, phthalate, etc must be avoided during the use and storage.